



3.00mm (.118") Pitch Micro-Fit 3.0™ Overmolded Cable Assemblies


79516

Double-ended, Overmolded Assemblies with strain relief are available in multiple circuit sizes and cable lengths for a rugged signal connection

Micro-Fit 3.0 Overmolded Cable Assemblies are designed to meet the need for a high contact-density connector for signal or power applications. Available in 2, 4, 6 and 10 circuit sizes and 1, 3 and 5 meter lengths, the assemblies incorporate an overmolded strain relief mechanism for reduced mechanical stress.

The double-ended cable assemblies are capable of carrying 5 amperes of current. The housing features fully isolated contacts on each side of the connection, offering electrical and mechanical protection to the terminals. The overmolded strain relief reduces the mechanical stress on the wires and terminals during the mating and un-mating cycles. A positive latch on the housing prevents accidental disconnection caused by rough handling.

These Overmolded Cable Assemblies complement the broad line of Molex's Micro-Fit 3.0 offerings. With more than 500 part numbers and still growing, this expansive product line offers through hole and SMT options. SMT versions are available in tape and reel packaging for robotic placement on the PCB.

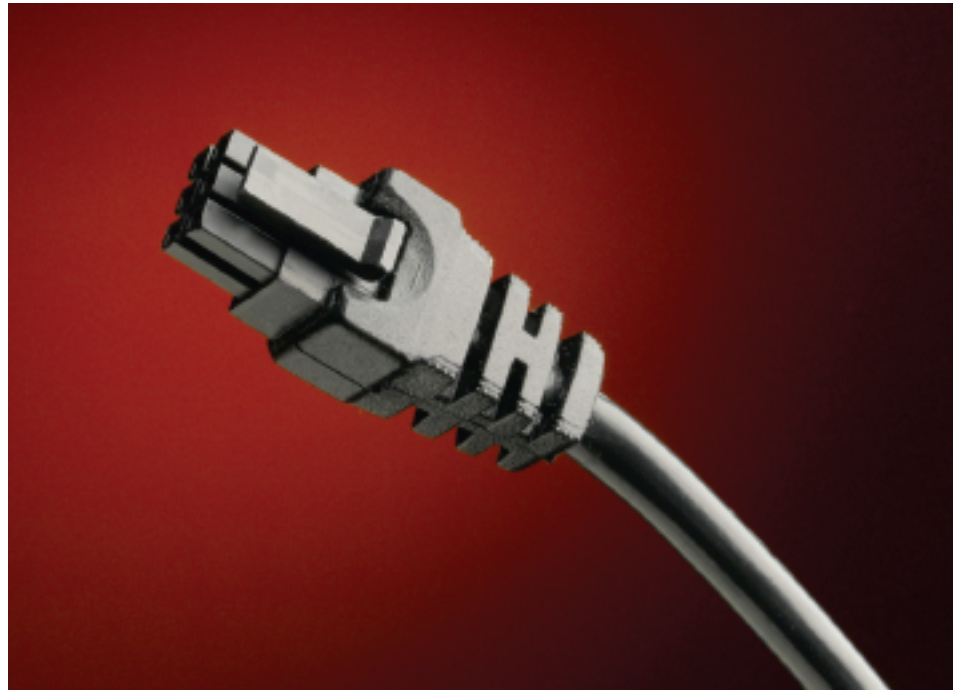

Features and Benefits

- Fully polarized housing prevents accidental mis-mating
- Positive latch prevents accidental disconnects
- Locking tang on terminal secures terminals in the housings
- Overmolded strain relief reduces the mechanical stress on the wires and terminals
- Double-ended assemblies provide a variety of application options

SPECIFICATIONS

Reference Information

Packaging: Bag
Mates With: 43020 and 43045
Designed In: Millimeters

Electrical

Voltage: 250V
Current: 3.0A max.
Contact Resistance: 10 milliohms max.
Dielectric Withstanding Voltage: 1500V AC
Insulation Resistance: 1000 Megohms min.

Mechanical

Contact Insertion Force: 1.5kgf (3.31 lbf) max.
Contact Retention to Housing: 2.5kgf (5.51 lbf) min.
Mating Force: 1.0kgf (2.20 lbf) max. per contact
Unmating Force: 3.7N (0.83 lbf) per circuit
Durability: Male connectors up to 30 cycles at a maximum rate of 10 cycles per minute

Physical

Housing: Polyester
Flammability: UL 94V-0
Contact: Phosphor Bronze
Plating:
Contact Area — Phosphor Bronze
Solder Tail Area — Tin (Sn)
Overmolding: PVC, Black, 15% Glass-filled
Flammability: UL 94V-2
Operating Temperature: -40 to +105°C


APPLICATIONS



3.00mm (.118") Pitch Micro-Fit 3.0™ Overmolded Cable Assemblies

79516

- Computer
 - Servers
 - Fan tray assemblies
- Medical
- Other Markets
 - Gaming and vending
 - Power supplies (computer, laptop, etc.)

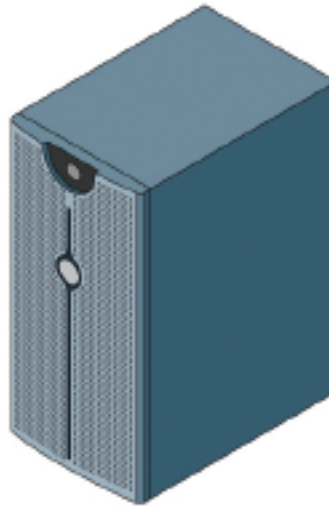

ORDERING INFORMATION

Double-ended Dual-Row Cable Assemblies

Order No.	Circuit	Cable Length (meter)
79516-1021	2	1
79516-1023		3
79516-1025		5
79516-1041	4	1
79516-1043		3
79516-1045		5
79516-1061	6	1
79516-1063		3
79516-1065		5
79516-1101	10	1
79516-1103		3
79516-1105		5

Americas Headquarters
Lisle, Illinois 60532 U.S.A.
1-800-78MOLEX
amerinfo@molex.com

Far East North Headquarters
Yamato, Kanagawa, Japan
81-462-65-2324
feninfo@molex.com

Far East South Headquarters
Jurong, Singapore
65-6-268-6868
fesinfo@molex.com

European Headquarters
Munich, Germany
49-89-413092-0
eurinfo@molex.com

Corporate Headquarters
2222 Wellington Ct.
Lisle, IL 60532 U.S.A.
630-969-4550
Fax:630-969-1352

Visit our Web site at <http://www.molex.com/product/pcb/microfit/oca.html>