



# HER101SG THRU HER108SG

## 1.0 AMP. Glass Passivated High Efficient Rectifiers



Voltage Range  
50 to 1000 Volts  
Current  
1.0 Ampere


### Features

- ✧ Low forward voltage drop
- ✧ High current capability
- ✧ High reliability
- ✧ High surge current capability

### Mechanical Data

- ✧ Case: Molded plastic A-405
- ✧ Epoxy: UL 94V-O rate flame retardant
- ✧ Lead: Axial leads, solderable per MIL-STD-202, Method 208 guaranteed
- ✧ Polarity: Color band denotes cathode end
- ✧ High temperature soldering guaranteed: 260°C/10 seconds/.375", (9.5mm) lead lengths at 5 lbs., (2.3kg) tension
- ✧ Mounting position: Any
- ✧ Weight: 0.22 gram

### A-405

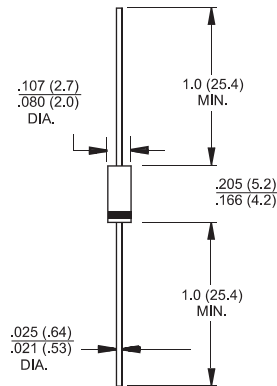

Dimensions in inches and (millimeters)

### Maximum Ratings and Electrical Characteristics

Rating at 25°C ambient temperature unless otherwise specified.  
Single phase, half wave, 60 Hz, resistive or inductive load.  
For capacitive load, derate current by 20%

Type Number	Symbol	HER	HER	HER	HER	HER	HER	HER	HER	Units
		101SG	102SG	103SG	104SG	105SG	106SG	107SG	108SG	
Maximum Recurrent Peak Reverse Voltage	$V_{RRM}$	50	100	200	300	400	600	800	1000	V
Maximum RMS Voltage	$V_{RMS}$	35	70	140	210	280	420	560	700	V
Maximum DC Blocking Voltage	$V_{DC}$	50	100	200	300	400	600	800	1000	V
Maximum Average Forward Rectified Current .375 (9.5mm) Lead Length @ $T_A = 55^\circ\text{C}$	$I_{(AV)}$	1.0								A
Peak Forward Surge Current, 8.3 ms Single Half Sine-wave Superimposed on Rated Load (JEDEC method)	$I_{FSM}$	30								A
Maximum Instantaneous Forward Voltage @ 1.0A	$V_F$	1.0			1.3		1.7			V
Maximum DC Reverse Current @ $T_A=25^\circ\text{C}$ at Rated DC Blocking Voltage @ $T_A=125^\circ\text{C}$	$I_R$	5.0 150								uA uA
Maximum Reverse Recovery Time (Note 1)	$T_{rr}$	50				75				nS
Typical Junction Capacitance (Note 2)	$C_j$	20				15				pF
Typical Thermal Resistance (Note 3)	$R_{\theta JA}$	90								°C/W
Operating Temperature Range	$T_J$	-65 to +150								°C
Storage Temperature Range	$T_{STG}$	-65 to +150								°C

Notes: 1. Reverse Recovery Test Conditions:  $I_F=0.5A$ ,  $I_R=1.0A$ ,  $I_{RR}=0.25A$   
2. Measured at 1 MHz and Applied Reverse Voltage of 4.0 V D.C.  
3. Mount on Cu-Pad Size 5mm x 5mm on PCB.

## RATINGS AND CHARACTERISTIC CURVES (HER101SG THRU HER108SG)

FIG.1- REVERSE RECOVERY TIME CHARACTERISTIC AND TEST CIRCUIT DIAGRAM

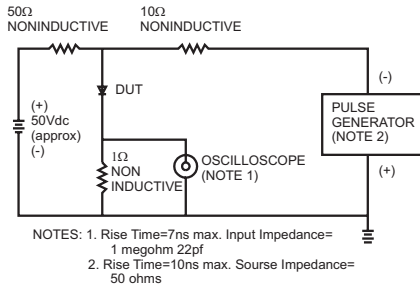


FIG.2- MAXIMUM FORWARD CURRENT DERATING CURVE

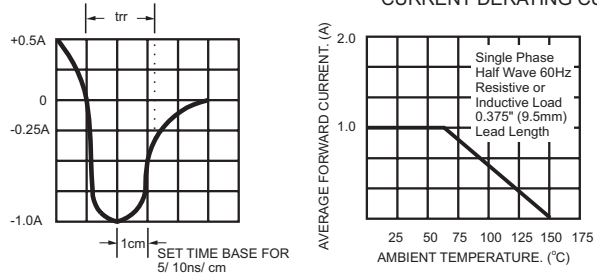


FIG.3- TYPICAL REVERSE CHARACTERISTICS

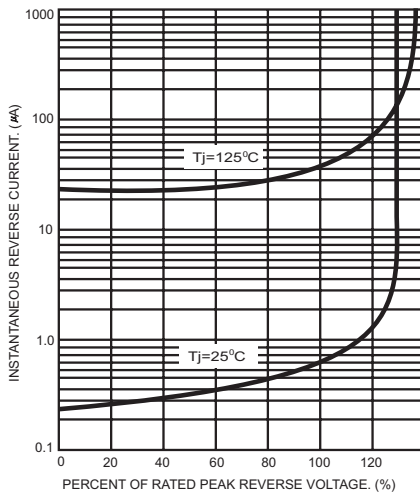


FIG.4- TYPICAL FORWARD CHARACTERISTICS

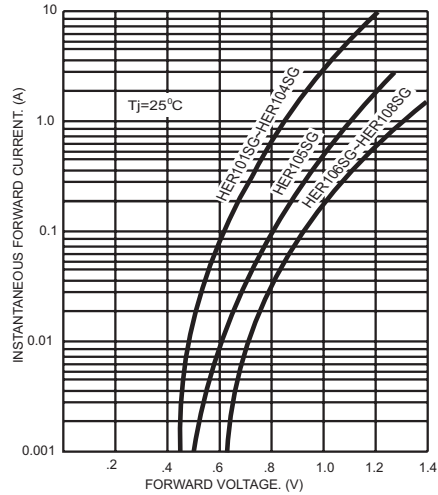


FIG.5- MAXIMUM NON-REPETITIVE FORWARD SURGE CURRENT

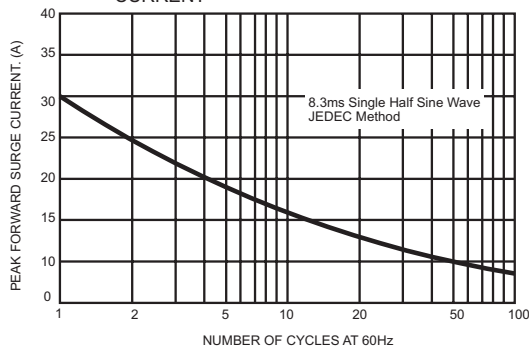


FIG.6- TYPICAL JUNCTION CAPACITANCE

