

# HTC series, high-precision, thin-film chip capacitors.




Capacitance tolerance as tight as  $\pm 0.035\text{PF}$ , and low equivalent series resistance.  
 Chip sizes of 0402 and 0201 are available.  
 Space saving face down mounting is possible.

RoHS compliant

Completely lead free

## SPECIFICATIONS

### Mechanical

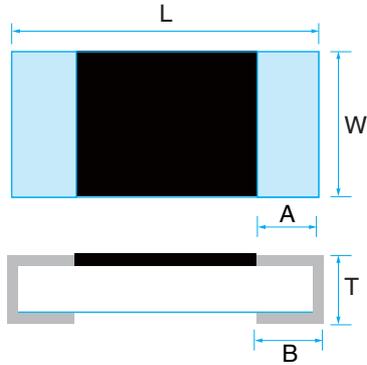

Dimension (Inch Size)	HTC0603 (0201)	HTC1005 (0402)
L	0.6±0.03	1.0±0.05
W	0.3±0.03	0.5±0.05
A	0.12±0.05	0.2±0.10
B	0.15±0.05	0.25±0.10
T	0.28±0.03/-0.05	0.28±0.05

(unit : mm)

### Electrical

Type	HTC0603				HTC1005		
	Capacitance Range (pF)	0.1~0.45	0.5~0.7	0.8~1.0	1.2~1.8	0.1~0.7	0.75~1.0
Capacitance Value	0.05pF step	0.1pF step		E-12	0.05pF step		E-12
Capacitance tolerance	$\pm 0.035\text{pF}$		$\pm 5\%$		$\pm 0.035\text{pF}$	$\pm 5\%$	
Temperature coefficient of capacitance(ppm/°C)	0±60ppm/°C						
Rated Voltage (V)	25V						
Operating Temp. Range(°C)	-40~85°C						
Package	5,000(T5), 10,000pcs						

## PART NUMBER

# HTC 0603 - 1E - R30 - J (-L5)

- Given to 5,000 piece reels
- Tolerance of capacitance : J( $\pm 5\%$ ), T35( $\pm 0.035\text{pF}$ )
- Capacitance : R30(0.30pF)
- Rated Voltage : 1E(25V)
- Dimensions
- Part Code