


Regulated / Isolated**DC / DC CONVERTERS****RB Series****1.5 Watt (up to 2 Watt) Single/Dual Output**

- Low noise regulated outputs
- Miniature 24 pin dip package
- 300 VDC input/output isolation
- Short circuit protected
- -25°C to +85°C case temperature operating
- -55°C to 100°C storage temperature

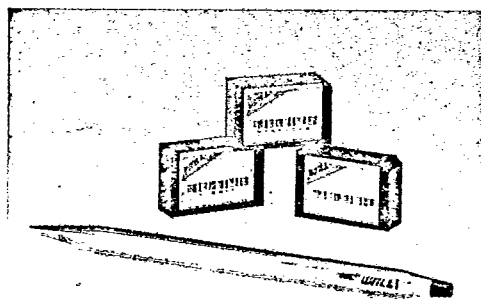


Size: 1.25" x 0.8" x 0.4"

Input Voltage	Output Voltage	Output Current	Regulation % Line/Load $\pm$	Ripple	Case	Modell
5 VDC ($\pm 10\%$)	5 VDC	220 mA	0.3%/0.5% of Vout	≤ 75 mV P-P max	1	RBS55
	12 VDC	100 mA				RBS512
	15 VDC	90 mA				RBS515
	24 VDC	50 mA				RBS524
	30 VDC	45 mA				RBS530
	± 12 VDC	50 mA				RBD512
12 VDC ($\pm 10\%$)	± 15 VDC	45 mA				RBD515
	5 VDC	220 mA				RBS25
	12 VDC	100 mA				RBS212
	15 VDC	90 mA				RBS215
	24 VDC	50 mA				RBS224
	30 VDC	45 mA				RBS230
	± 12 VDC	50 mA				RBD212
	± 15 VDC	45 mA				RBD215

GTR Series**2.4 Watt Single/Dual Output**

- Tracking linear output regulators
- Low noise outputs
- Thermal shutdown
- 1000 VDC input/output isolation
- -25°C to +85°C case temperature operating
- -55°C to 100°C storage temperature

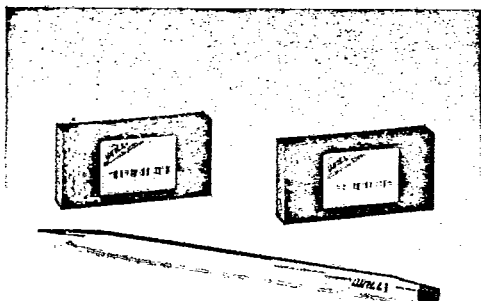

Size: 2.00" x 1.00" x .38"

Input Voltage	Output Voltage	Output Current	Regulation % Line/Load $\pm$	Ripple	Case	Model
5 VDC ($\pm 10\%$)	± 12 VDC	60 mA	0.3%/0.5% of Vout	≤ 75 mV P-P max	2	GTR5-12-60
	± 15 VDC	60 mA				GTR5-15-60
12 VDC ($\pm 10\%$)	± 15 VDC	60 mA				GTR2-15-60
	± 12 VDC	60 mA				GTR2-12-60
24 VDC ($\pm 10\%$)	± 15 VDC	60 mA				GTR4-12-60
	± 15 VDC	60 mA				GTR4-15-60

For further Information:
Call 800-321-WALL • 603-778-2300

14