

E-Series 2-Way 0° Power Divider

1 - 650 MHz

ES-2-1W

V3.00

Features

- 2 Way
- 0°

Specifications @ 25°C

Frequency Range		1 - 650 MHz
Insertion Loss	Typical	Maximum
	1 -10 MHz	0.3 dB
	10 - 325 MHz	0.5 dB
	325 - 650 MHz	0.7 dB
Isolation	Typical	Minimum
	1 -10 MHz	20 dB
	10 - 325 MHz	20 dB
	325 - 650 MHz	25 dB
Amplitude Unbalance	Maximum	
	1 -10 MHz	0.15 dB
	10 - 325 MHz	0.2 dB
	325 - 650 MHz	0.3 dB
Phase Unbalance	Maximum	
	1 -10 MHz	2°
	10 - 325 MHz	3°
	325 - 650 MHz	4°

Operating Characteristics

Impedance	50 Ohms Nominal
-----------	-----------------


Ordering Information

Part No.	Packaging
ES-2-1W	Tube
ES-2-1WTR	Forward Tape & Reel

Absolute Maximum Ratings

Parameter	Absolute Maximum
Maximum Power Rating	1 Watt
Internal Load Dissipation	0.125 Watt
Pin Temp (10 sec)	260°C
Storage Temperature	-55°C to 100°C

R-1

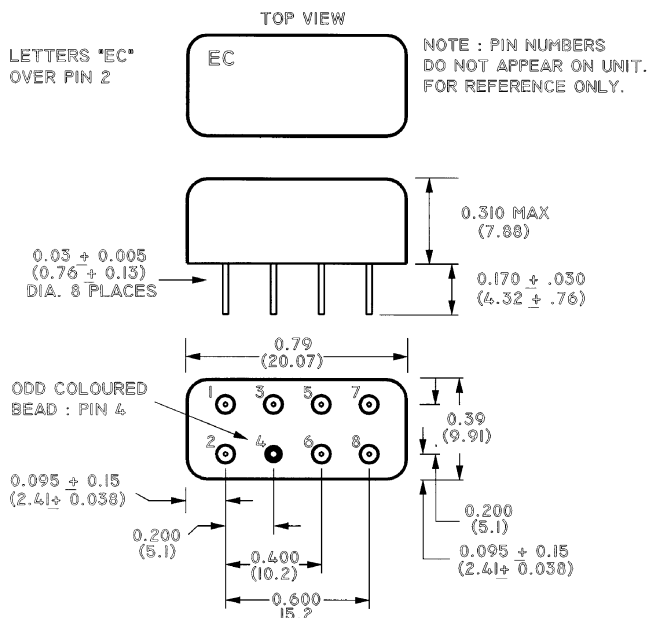

Dimensions in () are in mm.
 Unless Otherwise Noted: .x = ±0.04 (1.00)
 .xx = ±0.02 (0.50)
 .xxx = ±0.010 (0.250)
 WEIGHT (APPROX.): 0.23 OUNCES 6.3 GRAMS

Pin Configuration

Function	Pin No.
Ground	2,3,4,7,8
Case Ground	2,3,4,7,8
Input	1
Port 1	5
Port 2	6

S 0237 C