

2SD1265, 2SD1265A

Silicon NPN Triple-Diffused Junction Type

Power Amplifier


■ Features

- Wide area of safety operation (ASO)
- "Full Pack" package for simplified mounting on a heat sink with one screw

■ Absolute Maximum Ratings (Tc=25°C)

Item	Symbol	Value	Unit
Collector-base voltage	V _{CB0}	60	V
		80	
Collector-emitter voltage	V _{CE0}	60	V
		80	
Emitter-base voltage	V _{EB0}	8	V
Peak collector current	I _{CP}	6	A
Collector current	I _C	4	A
Base-emitter voltage	I _B	1	A
Collector power dissipation	P _C	30	W
		2	
Junction temperature	T _j	150	°C
Storage temperature	T _{stg}	-55 ~ +150	°C

■ Package Dimensions

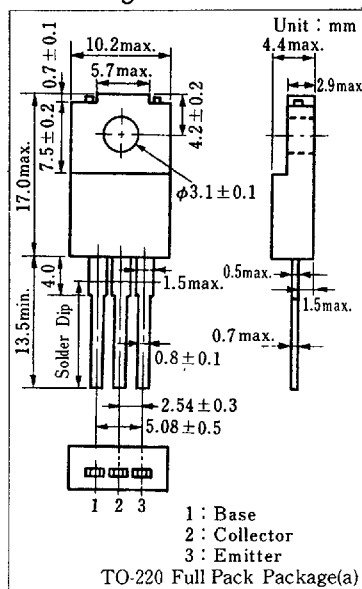

■ Electrical Characteristics (Tc=25°C)


Item	Symbol	Condition	min.	typ.	max.	Unit
Collector cutoff current	I _{CB0}	V _{CB} =20 V, I _E =0			30	μA
Emitter cutoff current	I _{EBO}	V _{EB} =8 V, I _C =0			1	mA
Collector-emitter voltage	V _{CE0(sus)} *2	I _C =0.2 A, L=25 mH	60			V
			80			
DC current gain	h _{FE1}	V _{CE} =3 V, I _C =0.1 A	40			
	h _{FE2} *1	V _{CE} =3 V, I _C =1 A	30		160	
Base-emitter voltage	V _{BE}	V _{CE} =3 V, I _C =1 A			1.2	V
Collector-emitter saturation voltage	V _{CE(sat)}	I _C =2 A, I _B =0.4 A			1	V
Transition frequency	f _T	V _{CE} =10 V, I _C =0.2 A, f=0.5 MHz		1		MHz

*1 h_{FE2} Classifications

Class	Q	P	O
h _{FE2}	30 ~ 60	50 ~ 100	80 ~ 160

*2 V_{CE0(sus)} Test method

Mercury relay 50/60 Hz

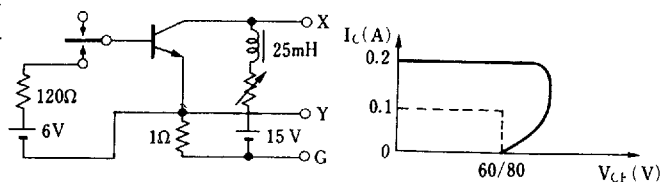

2SD1265/2SD1265A

