

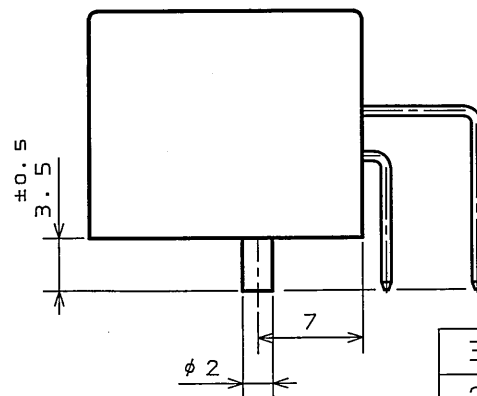
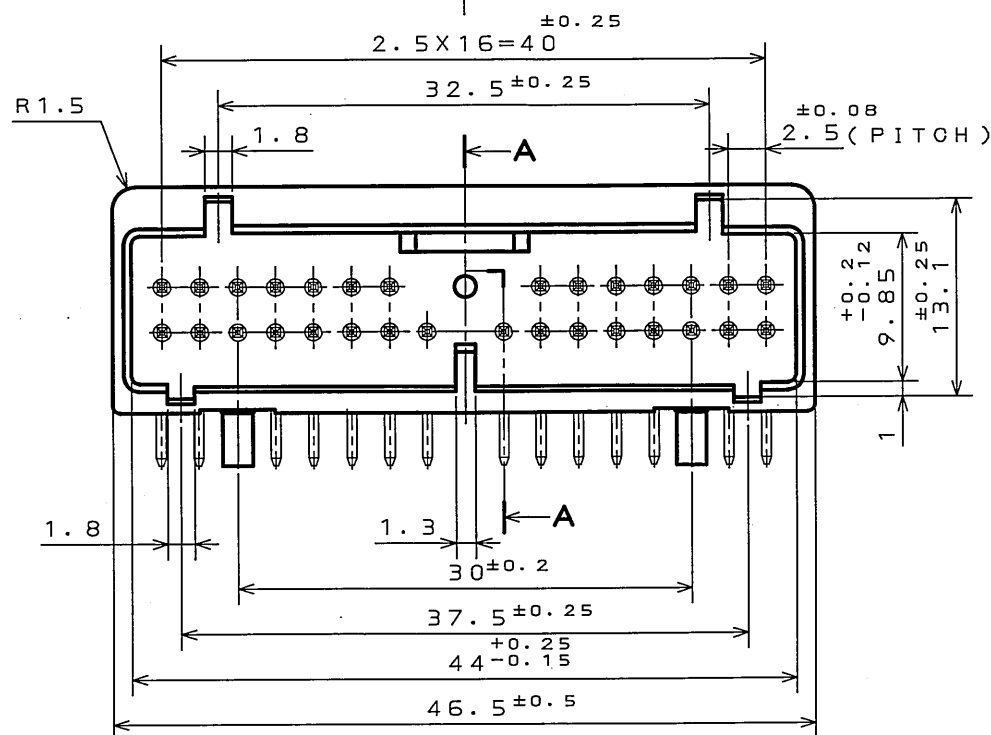
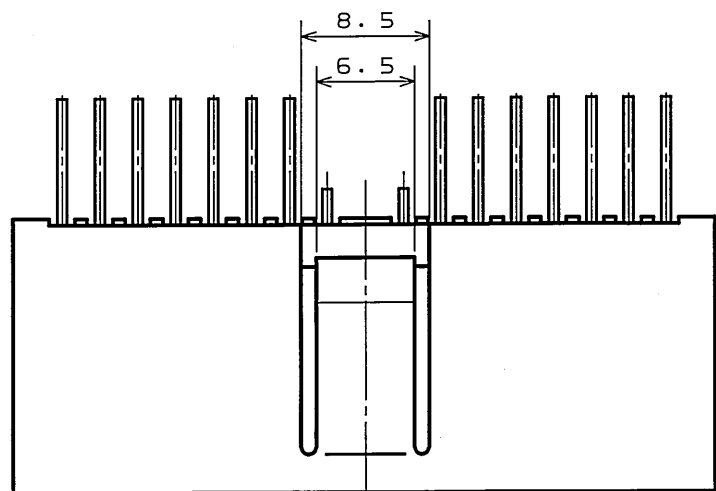


19Z3261
(ON 0NIMVHD)台景图

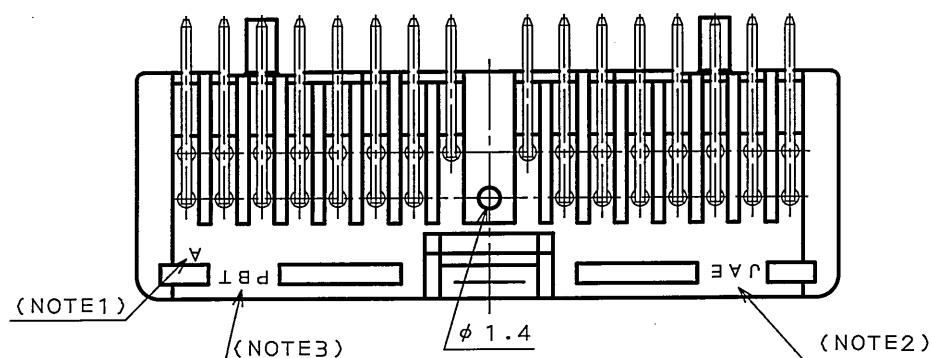

SECT. A-A
(SCALE 5:1)

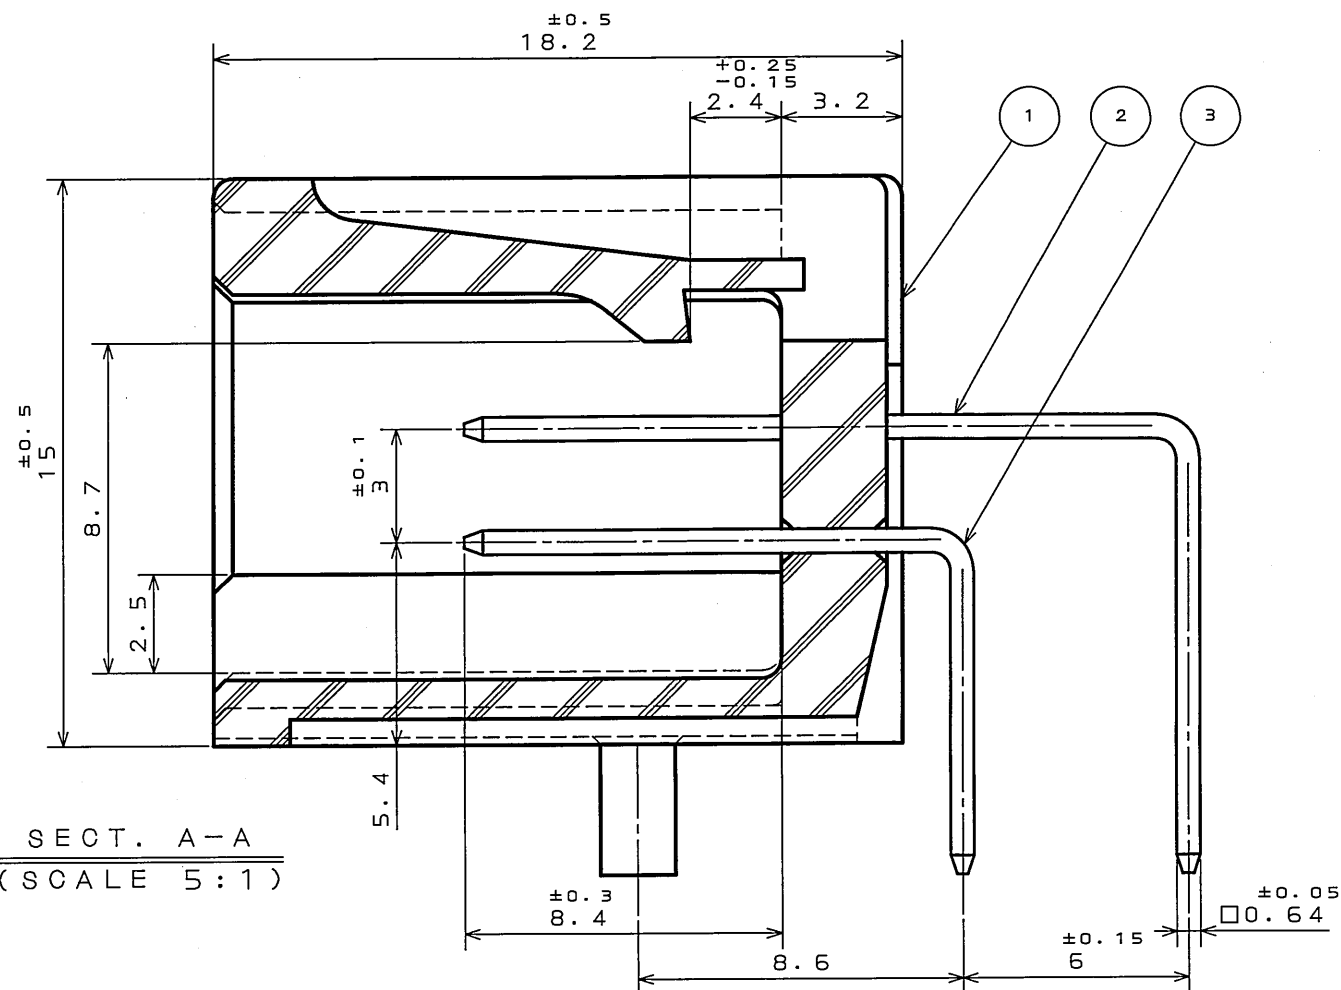

- △ NOTE1. MOLD CAVITY DESIGNATOR APPEARS IN RAISED LETTERS.
2. COMPANY LOGO "JAE" APPEARS IN RAISED LETTERS.
3. MATERIAL MARK APPEARS IN RAISED LETTERS.
△ 4. CONTACT TIP IS NOT PLATED AT POINT OF BREAK OFF.
注1. 金型マークを浮き出す。
2. 社標を浮き出す。
3. 材料マークを浮き出す。
4. コンタクト先端部に、めっきは付かない。

3	CONTACT B	16	BRASS	TIN PLATING	
2	CONTACT A	14	BRASS	TIN PLATING	
1	INSULATOR	1	P B T		COLOR:GREEN
符 号 NO.	名 称 DESCRIPTION	個 数 QTY.	材 料 MATERIAL	仕 上 FINISH	備 考 REMARKS
仕様書 (SPECIFICATION)		第1版 (ORIGINAL DATE)		JAE-CONNECTOR.COM	
JACS-1309-*		11.Nov.1988		日本航空電子工業株式会社	
一般公差 (GENERAL TOLERANCE)		製図 DR.	E.MURANO	Reference Only	
寸法 (DIMENSION)		担当 CHK.	Y.ICHIMURA	JAE AVIATION	
角度 (ANGLES)		査閲 APPD.	I.IIMORI	ELECTRONICS	
. ±0.2		承認 APPD.	K.TAKEDA	INDUSTRY, LTD.	
.X ±0.2				図面番号 (DRAWING NO.)	
.XX ±				SJ023261	
.XXX ±					