

To all our customers

Regarding the change of names mentioned in the document, such as Mitsubishi Electric and Mitsubishi XX, to Renesas Technology Corp.

The semiconductor operations of Hitachi and Mitsubishi Electric were transferred to Renesas Technology Corporation on April 1st 2003. These operations include microcomputer, logic, analog and discrete devices, and memory chips other than DRAMs (flash memory, SRAMs etc.) Accordingly, although Mitsubishi Electric, Mitsubishi Electric Corporation, Mitsubishi Semiconductors, and other Mitsubishi brand names are mentioned in the document, these names have in fact all been changed to Renesas Technology Corp. Thank you for your understanding. Except for our corporate trademark, logo and corporate statement, no changes whatsoever have been made to the contents of the document, and these changes do not constitute any alteration to the contents of the document itself.

Note : Mitsubishi Electric will continue the business operations of high frequency & optical devices and power devices.

Renesas Technology Corp.
Customer Support Dept.
April 1, 2003

Description


The M62463AFP is a Single Chip Dolby Pro Logic Surround Decoder. This LSI has all of required functions for Dolby Pro Logic Surround.

Dolby and the double-D symbol are trademarks of Dolby Laboratories Licensing Corporation. San Francisco, CA94103-4813, USA.

This device available only to licensees of Dolby Lab.

Licensing and application information may be obtained from Dolby Lab.

Outline




Outline 64P6N
0.8mm pitch QFP
(14.0mmx14.0mmx2.8mm)


Features

- Includes all functions necessary for Dolby Pro Logic Surround
 - Adaptive Matrix
 - Input Auto-Balance
 - Noise Sequencer
 - Center Mode Control ON/OFF, WIDE/NORMAL/PHANTOM
 - Modified Dolby B type Noise Reduction
 - 4 channel (Lch/Rch/Cch/Sch) / 3 channel (Lch/Rch/Cch)
 - Digital delay Delay time:15.4 to 51.2msec
- Cch/Sch Master Volume 0 to -87dB/1dB step, $-\infty$
- 3-lines MCU control
- Space Surround such as Disco, Hall and Live
- Digital Echo for Karaoke Function Delay time 123,184msec
- Current control oscillation circuit for system clock

System Configuration

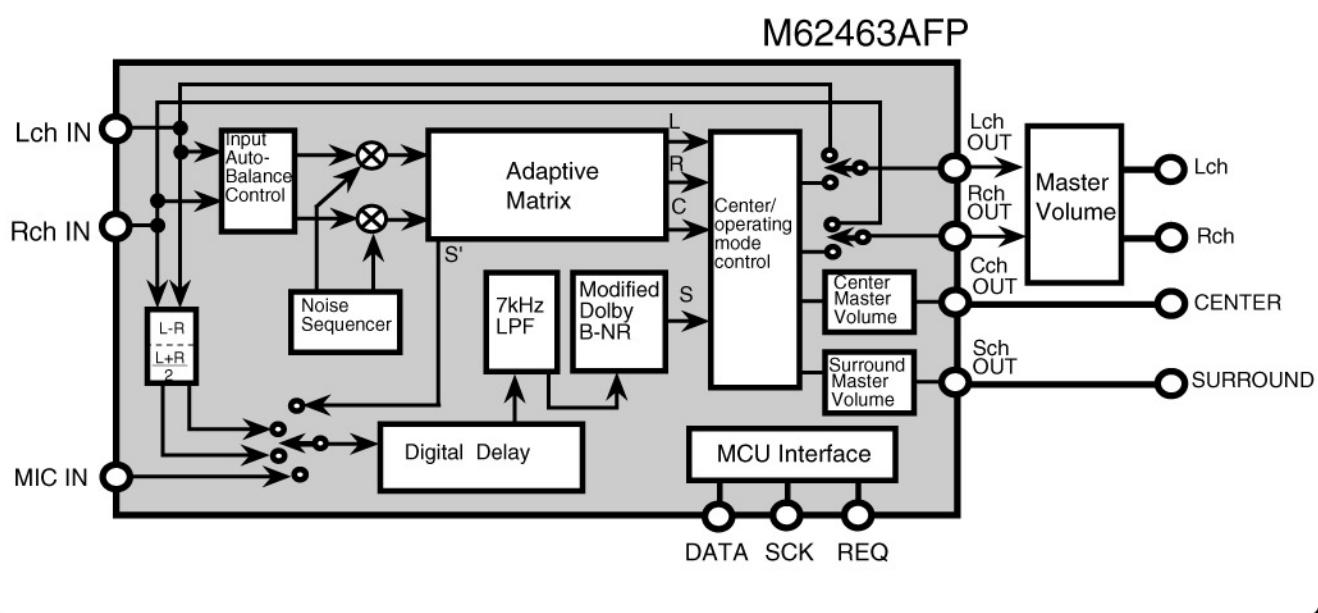

Pin Configuration

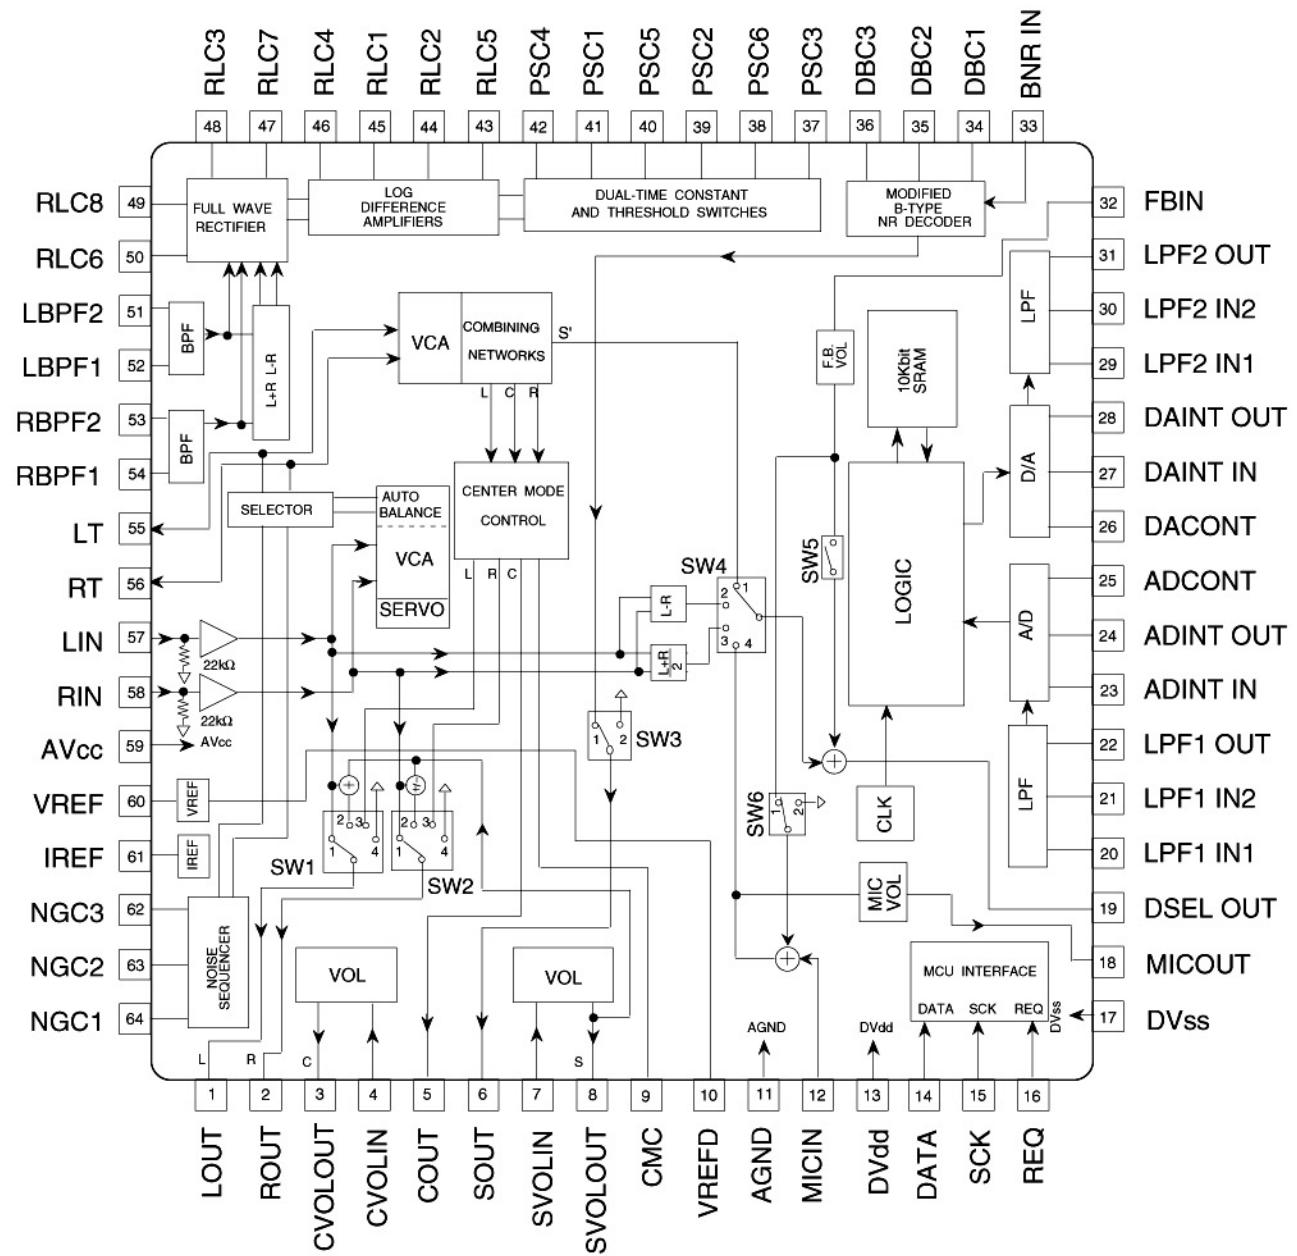


PRELIMINARY
Notice ; This is not a final specification.
some parametric limits are subject to change.

MITSUBISHI SOUND PROCESSORS

M62463AFP

Dolby Pro Logic Surround Decoder

Block Diagram

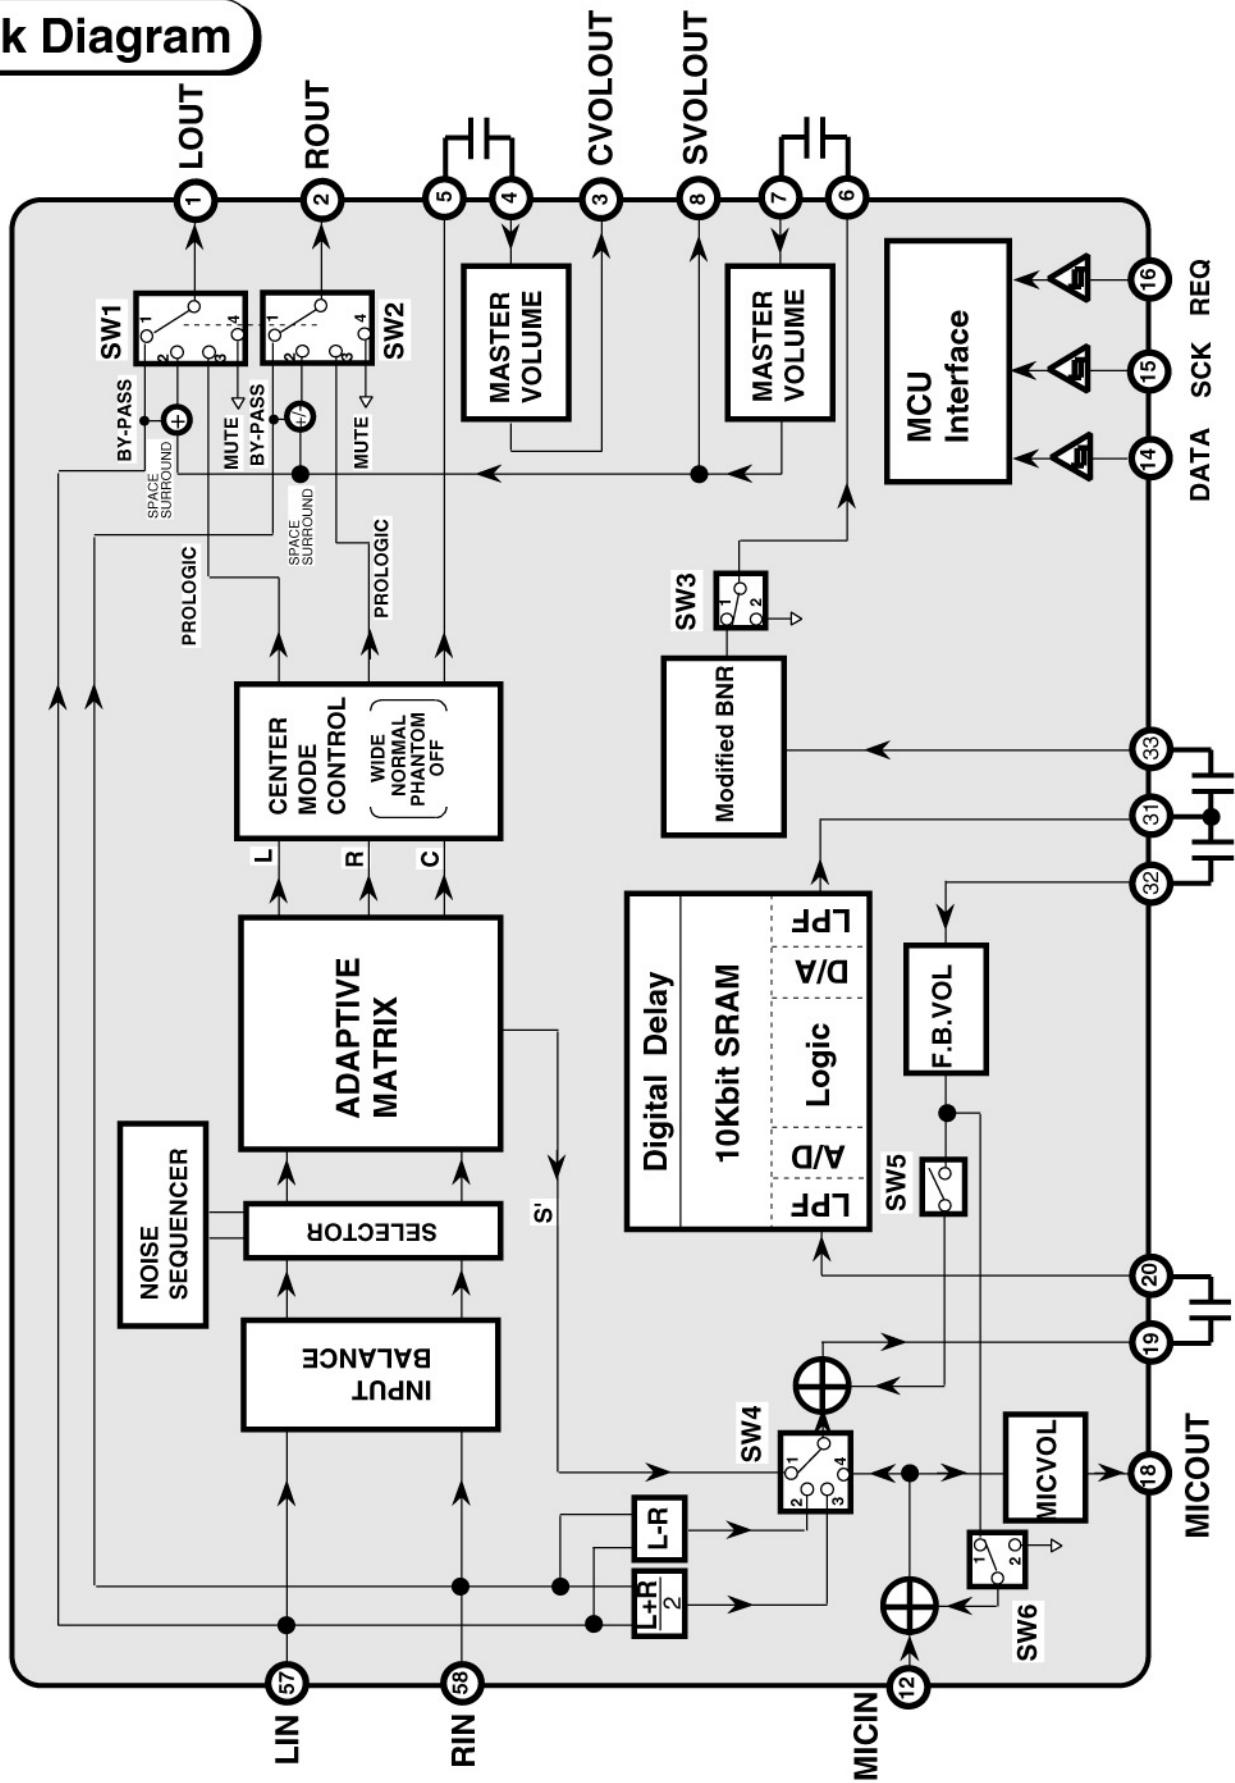

FUNCTIONAL DESCRIPTION

FUNCTION		DESCRIPTION
1	Fundamental function for Dolby Pro Logic Surround Decoder	<ul style="list-style-type: none"> -Adaptive Matrix -Input Auto-Balance -Noise Sequencer -Center Mode Control ON/OFF WIDE/NORMAL/PHANTOM -Modified Dolby B type Noise Reduction -4ch(L,R,C,S), 3ch(L,R,C) Mode Switch
2	RAM for Digital Delay	10K-bit RAM
3	Surround Delay Time	15.4, 20.5, 25.6, 29.2msec (for Dolby Pro Logic Surround) 51.2msec (for Space Surround)
4	Circuit for Space Surround	Digital delay circuit can be used for Space Surround such as a Disco, Hall or Live, and Karaoke echo.
5	Echo delay time	123,184 msec
6	Feedback Volume	Delay Signal Feedback Volume -3 to -21 dB/3dB step, and $-\infty$
7	Microphone Volume	Internal Microphone Volume 0 to -18 dB/3dB step, and $-\infty$
8	Cch/Sch Master Volume	0 to -87dB/1dB step, and $-\infty$
9	Bypass Switch	Bypass the decode circuit
10	Output Mute	Mute the Lch and Rch output
11	MCU Interface	Controlled by 3-lines serial data from MCU Including the Chip Address (2 bit)
12	Current control oscillation circuit	Including the oscillation circuit without external parts.

ABSOLUTE MAXIMUM RATINGS

(Ta=25°C Unless otherwise noted)

Symbol	Parameter	Conditions	Ratings	Unit
Vcc	Supply Voltage		10.5	V
Vdd			6.5	V
Pd	Power Dissipation		1	W
Topr	Operating Temperature		-20 to +75	°C
Tstg	Storage Temperature		-40 to +125	°C

RECOMMENDED OPERATING CONDITION

Symbol	Parameter	Condition	Limits			Units
			Min	Typ	Max	
Vcc	Supply Voltage		8	9	10	V
Vdd			4.5	5	5.5	V
VIL	Input Voltage(L)	14,15,16pin	0	—	0.8	V
VIH	Input Voltage(H)	14,15,16pin	Vdd-1	—	Vdd	V

PRELIMINARY
Notice ; This is not a final specification.
some parametric limits are subject to change.

MITSUBISHI SOUND PROCESSORS

M62463AFP
Dolby Pro Logic Surround Decoder

ELECTRICAL CHARACTERISTICS

(Ta=25°C, Vcc=9V, Vdd=5V, Cch volume=0dB, at C-OUT 0dBd=300mVrms, f=1kHz unless otherwise noted)

Symbol	Parameter	Test conditions	Limits			Units
			Min	Typ	Max	
Total						
Icc	Circuit current	No signal	—	25	40	mA
IDD	Circuit current	No signal	—	13	25	mA
Auto-Balance						
CPR	Capture range		—	5	—	dB
CER	Error collection		—	4	—	dB
Adaptive Matrix						
△VoL	Output level accuracy relative to Cch	L, R, Sch output	-0.5	0	0.5	dB
MR	Matrix rejection	L, R, C, Sch output	25	40	—	dB
HRAM	Head room	L, R, C, Sch output	15	17	—	dB
THDAM	Total harmonic distortion	L, R, Cch output 30kHzLPF	—	0.05	0.2	%
SNAM	S/N ratio	Rg=0Ω, weighted CCIR/ARM 4ch mode	70	80	—	dB
Noise Sequencer						
Vno	Output noise level	L, R, C, Sch output	-15	-12.5	-10	dB
△Vno	Noise level accuracy relative to Cch	L, R, Sch output	-0.5	0	0.5	dB
Modified B Noise Reduction (Sch Volume=0dB, 0dB reference is 300mVrms/100Hz at S-Out)						
VGNR	Gain between input and output	Vin=0dBd,f=100Hz	—	5.1	—	dB
DEC1	Decode character 1	Vin=0dBd,f=1.0kHz	-1.6	-0.1	1.4	
DEC2	Decode character 2	Vin=-15dBd,f=1.4kHz	-3.0	-1.5	0	
DEC3	Decode character 3	Vin=-20dBd,f=1.4kHz	-4.9	-3.4	-1.9	
DEC4	Decode character 4	Vin=-40dBd,f=5.0kHz	-6.8	-5.3	-3.8	
THDNR	Total harmonic distortion	Vin=0dBd,f=1kHz 30kHzLPF	—	0.07	0.3	%
HRNR	Head room	THD=1%	15	17	—	dB
SNNR	S/N ratio	Rg=0Ω, weighted CCIR/ARM	68	78	—	dB
Cch/Sch Master Volume						
ATT _{max}	Maximum attenuator	ATT=-∞, Vi=2Vrms	—	-95	-87	dB
ATT _{min}	Minimum attenuator	ATT=0dB	-3.0	0	3.0	dB
VOLS1	Volume step	ATT=0 to -40dB	0.5	1.0	1.5	dB
VOLS2	Volume step	ATT=-40 to -87dB	0.2	1.0	1.8	dB
CTVOL	Volume cross-talk	R input/CVOL, SVOL output	68	83	—	dB
VnoVOL	Output noise voltage	ATT=-∞	—	2.6	5.2	μVrms
Line(Bypass mode)						
THDLN	Total harmonic distortion	L,Rch output 30kHzLPF	—	0.002	0.05	%
SNLN	S/N ratio	L,Rch output	95	100	—	dB
CTLN	Line cross-talk	L input/R output, R input/L output	70	80	—	dB
Zi	Input impedance		11	22	44	kΩ

PRELIMINARY
Notice ; This is not a final specification.
some parametric limits are subject to change.

MITSUBISHI SOUND PROCESSORS

M62463AFP
Dolby Pro Logic Surround Decoder


(Ta=25 °C, Vcc=9V, Vdd=5V, Vin=200mVrms, f=1kHz unless otherwise noted)

Symbol	Parameter	Test Conditions	Limits			Units
			Min	Typ	Max	
Digital Delay						
GvD	Input/output voltage gain	LIN-LPF2OUT,surround L-R	-8.1	-5.1	-2.1	dB
Td	Delay time	Td=20.5ms	17.4	20.5	23.6	ms
THDD	Total harmonic distortion	30kHzLPF	Td=20.5ms	—	0.5	0.9
			Td=51.2ms	—	1.2	2.2
			Td=184ms	—	3.0	5.6
NoD	Output noise voltage	Vin=0Vrms JIS-A	Td=20.5ms	—	-92	-80
			Td=51.2ms	—	-84	-70
			Td=184ms	—	-80	-65
Vomax	Maximum output voltage	THD=10%	0.7	1.0	—	Vrms
LPFfc	LPF cut-off frequency	Td=15.4 to 51.2ms Gv=-3dB (Dolby Pro Logic mode)	6.0	7.0	8.0	kHz
		Td=123, 184ms(Echo mode) Gv=-3dB	—	3.0	—	kHz
Feedback Volume						
FBATT _{max}	Maximum attenuation	ATT=-∞	—	-70	-60	dB
FBATT _{min}	Minimum attenuation	ATT=-3dB	-6.0	-3.0	0	dB
FBVOLS	Volume step		—	3.0	—	dB
Microphone Volume						
MICATT _{max}	Maximum attenuation	ATT=-∞	—	-70	-60	dB
MICATT _{min}	Minimum attenuation	ATT=0dB	-3.0	0	3.0	dB
MICVOLS	Volume step		—	3.0	—	dB
VnoMIC	Output noise voltage	ATT=-∞	—	2.0	4.0	μVrms

SERIAL DATA CONTROL FORMAT

(1) Data Input Format

DATA is read at the rising edge of SCK, and loaded last 16 bits at the rising edge of REQ.

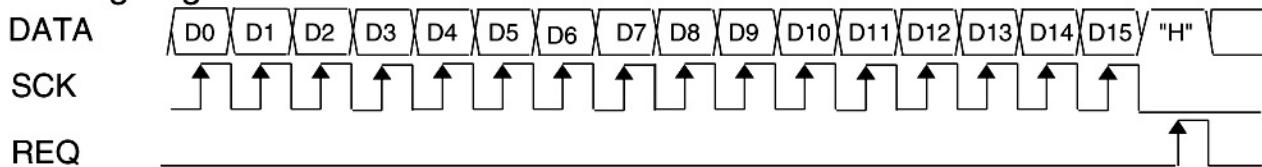

D0	D1	D2	D3	D4	D5	D6	D7	D8	D9	D10	D11	D12	D13	D14	D15	
L	L	Mode Set	Pro Logic Mode	Center Mode	Sch Volume								L	H		
	H	Delay Time			Auto-Balance	set to "L"	Cch Volume								Chip Address	
H	L	Noise Sequencer		Surround / Echo Mode												
	H	Test Mode (user inhibit)														

(2) Control condition

	Control Mode	Contents
1	Mode Set	Normal Stereo / Dolby Pro Logic / Space Surround or Echo/ Mute
2	Pro Logic Mode	4ch Pro Logic / 3ch stereo
3	Center Mode	Wide / Normal / Phantom / OFF
4	Delay Time	15.4, 20.5, 25.6, 29.2, 51.2 ms (for Surround) 123,184 ms (for Echo)
5	Auto-Balance	Input Auto-Balance ON / OFF
6	Noise Sequencer	ON / OFF Lch / Rch / Cch / Sch
7	Surround /Echo mode	Delay input L-R/ (L+R)/2 /MICin Feedback volume , Microphone volume Delay output mixing
8	Cch/Sch Volume	0 to -87dB / 1dB step and -∞
9	Chip Address	Input data effect or not

(3) Set Conditions

Mode Setting (D0="L", D1="L")

D2	D3	Condition
L	L	Normal stereo (bypass)
L	H	Dolby Pro Logic Surround
H	L	Space surround / Echo
H	H	Output Mute

Pro Logic Mode Setting(D0="L",D1="L")

D4	Condition
L	4ch Pro Logic
H	3ch Stereo

Center Mode Setting (D0="L",D1="L")

D5	D6	Condition
L	L	Wide
L	H	Normal
H	L	Phantom
H	H	OFF

Delay Time Setting (D0="L",D1="H")

D2	D3	D4	Delay time	Sampling frequency	LPF cutoff frequency
L	L	L	15.4msec	500kHz	7kHz
L	L	H	20.5msec	500kHz	
L	H	L	25.6msec	400kHz	
L	H	H	29.2msec	333kHz	
H	L	L	51.2msec	200kHz	
H	L	H	123msec	83.3kHz	3kHz
H	H	L	184msec	55.6kHz	

Auto-Balance Setting (D0="L",D1="H")

D5	Condition
L	Auto-Balance OFF
H	Auto-Balance ON

Noise Sequencer (D0="H",D1="L")

D2	D3	D4	Condition	
L	-	-	Noise Sequencer OFF	
H	L	L	Noise Sequencer ON	Lch
	L	H		Rch
	H	L		Cch
	H	H		Sch

Surround / Echo mode (D0="H",D1="L")

Surround / Echo mode switch

D5	Condition
L	Surround
H	Echo

Delay input

D6	Delay input
L	L-R
H	(L+R)/2

Delay Mixing polarity

D7	Mixing polarity
L	L+Delay signal/R+Delay signal
H	L+Delay signal/R-Delay signal

Feedback Volume

D8	D9	D10	Volume
L	L	L	-3dB
L	L	H	-6dB
L	H	L	-9dB
L	H	H	-12dB
H	L	L	-15dB
H	L	H	-18dB
H	H	L	-21dB
H	H	H	$-\infty$

Microphone Volume

D11	D12	D13	volume
L	L	L	0dB
L	L	H	-3dB
L	H	L	-6dB
L	H	H	-9dB
H	L	L	-12dB
H	L	H	-15dB
H	H	L	-18dB
H	H	H	$-\infty$

Relation between mode setting and switch condition

Mode Setting	Pro Logic Mode (D0=L,D1=L) D4	Surround/Echo Mode (D0=H,D1=L)		Switch Condition					
		D5	D6	SW1	SW2	SW3	SW4	SW5	SW6
Normal stereo (bypass)	X	X	X	1	1	2	4	OFF	2
Dolby Pro Logic Surround	L	X	X	3	3	1	1	OFF	2
	H					2			
Space surround / Echo	X	L (Surround)	L H	2	2	1	2	ON	2
	X	H (Echo)	X	1	1	2	4		
Delay mixing ON		Delay mixing OFF							
Mute	X	X	X	4	4	2	4	OFF	2

X:L or H

Sch Volume Setting (D0="L",D1="L")
 Cch Volume Setting (D0="L",D1="H")


Volume Level	D7	D8	D9	D10	D11
0 dB	L	L	L	L	L
-2 dB	L	L	L	L	H
-4 dB	L	L	L	H	L
-6 dB	L	L	L	H	H
-8 dB	L	L	H	L	L
-10 dB	L	L	H	L	H
-12 dB	L	L	H	H	L
-14 dB	L	L	H	H	H
-16 dB	L	H	L	L	L
-18 dB	L	H	L	L	H
-20 dB	L	H	L	H	L
-22 dB	L	H	H	L	H
-24 dB	L	H	H	L	L
-26 dB	L	H	H	L	H
-28 dB	L	H	H	H	L
-30 dB	H	L	L	L	H
-32 dB	H	L	L	L	L
-34 dB	H	L	L	L	H
-36 dB	H	L	L	L	L
-40 dB	H	L	H	H	H
-44 dB	H	L	H	L	L
-48 dB	H	L	H	L	H
-52 dB	H	L	H	H	L
-56 dB	H	L	H	H	H
-60 dB	H	H	L	L	L
-64 dB	H	H	H	L	H
-68 dB	H	H	H	L	L
-72 dB	H	H	H	L	H
-76 dB	H	H	H	L	L
-80 dB	H	H	H	H	H
-84 dB	H	H	H	H	L
-∞	H	H	H	H	H

Volume Level	D12	D13
0 dB	L	L
-1 dB	L	H
-2 dB	H	L
-3 dB	H	H

Chip Address

D14	D15	Data Read
L	H	Enable
Others		Unable


(4)Data timing

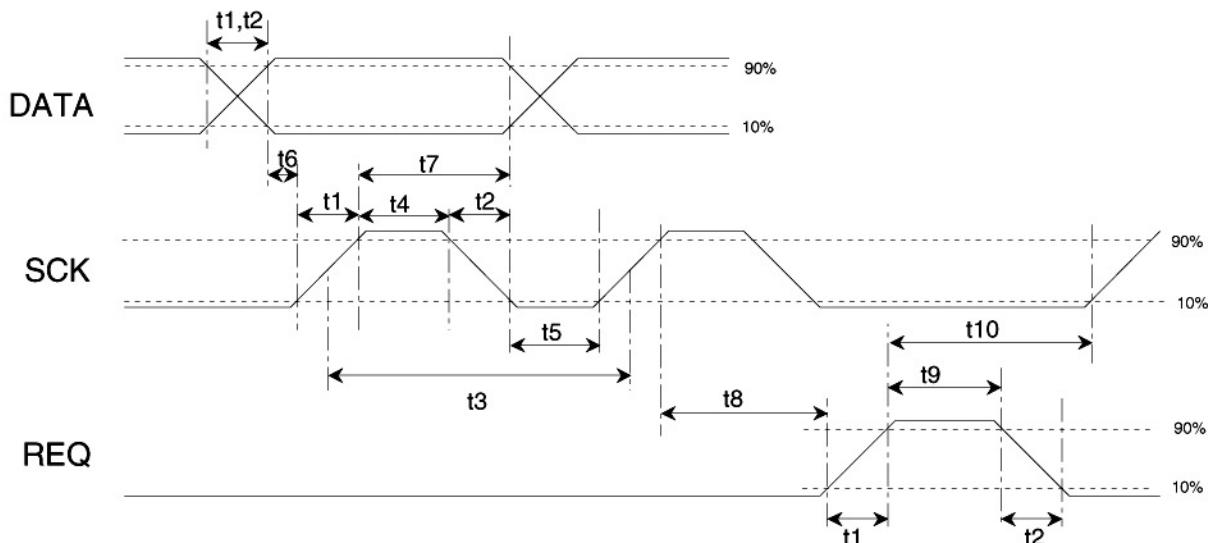

Symbol	Name	Min	Typ	Max	Units
t1	Signal rise time	—	—	0.5	μs
t2	Signal fall time	—	—	0.5	μs
t3	SCK clock width	2	—	—	μs
t4	SCK "H" pulse width	0.8	—	—	μs
t5	SCK "L" pulse width	0.8	—	—	μs
t6	DATA setup time	0.8	—	—	μs
t7	DATA hold time	0.8	—	—	μs
t8	REQ rise hold time	1.6	—	—	μs
t9	REQ "H" pulse width	0.8	—	—	μs
t10	SCK setup time	1.6	—	—	μs


Level Diagram

(1) Dolby Pro Logic Surround Mode

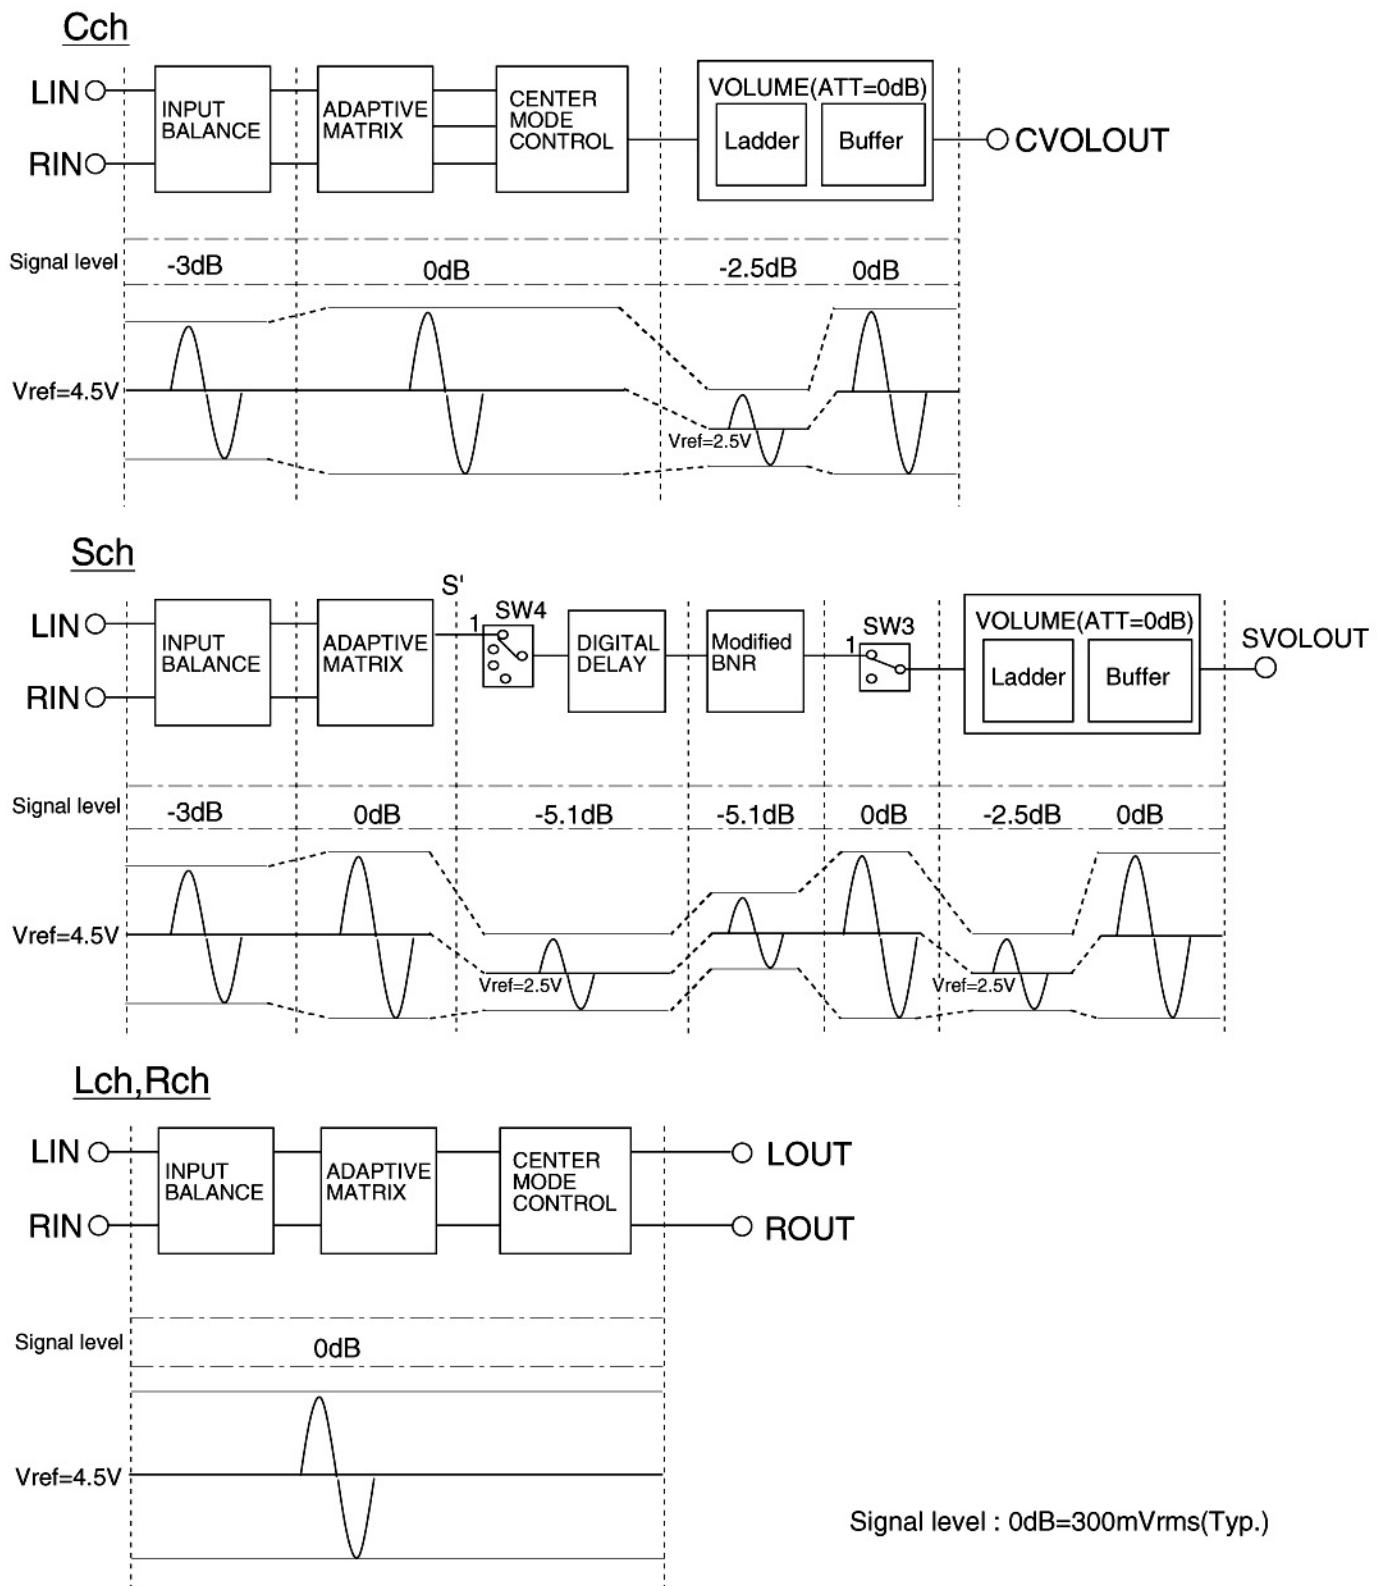


(2) Space Surround Mode

Sch

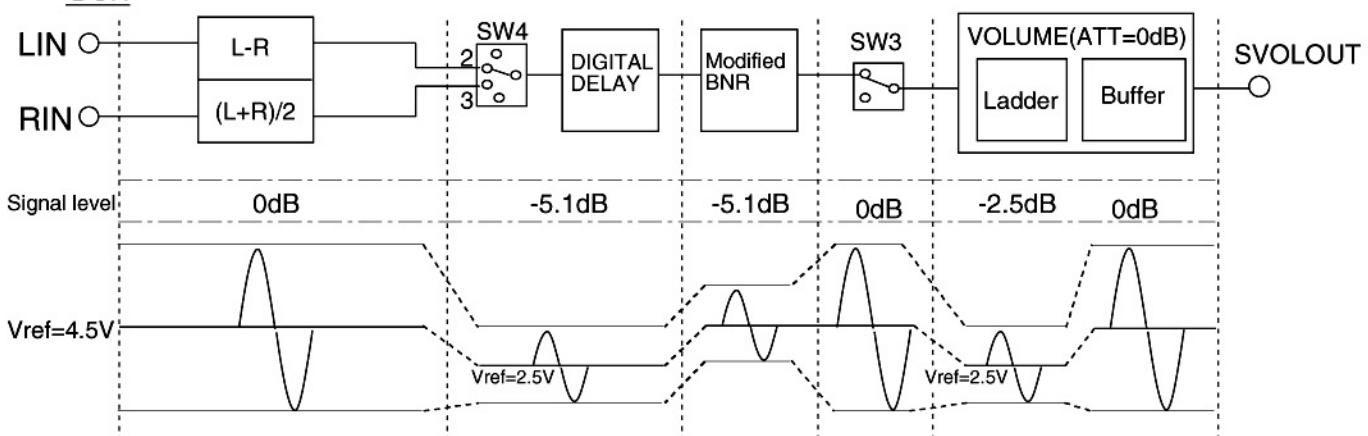


(3) Echo Mode

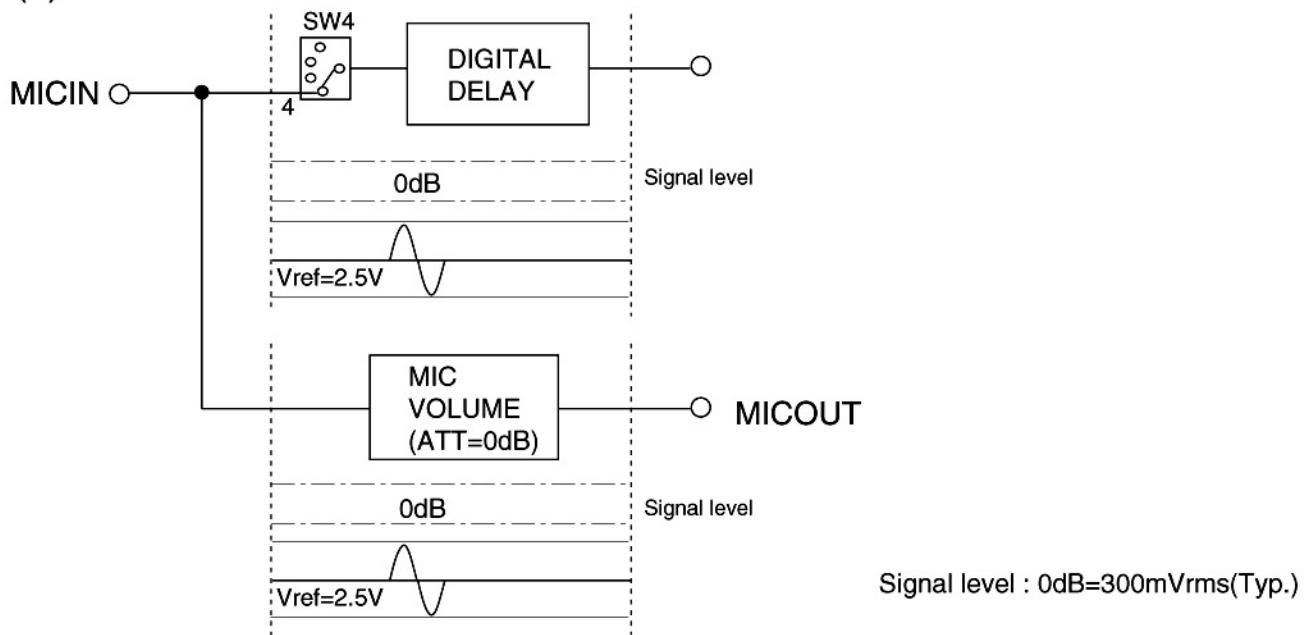


Notice

Relation AVcc and DVdd at power supply

Digital Vdd must be supplied less than 0.7 seconds from analog Vcc supply.

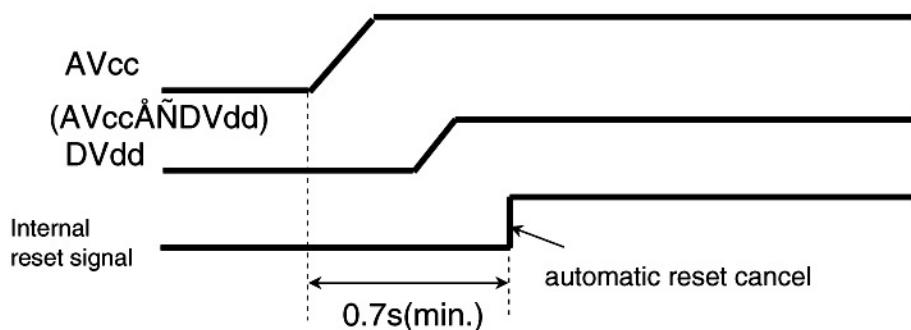

APPLICATION EXAMPLE

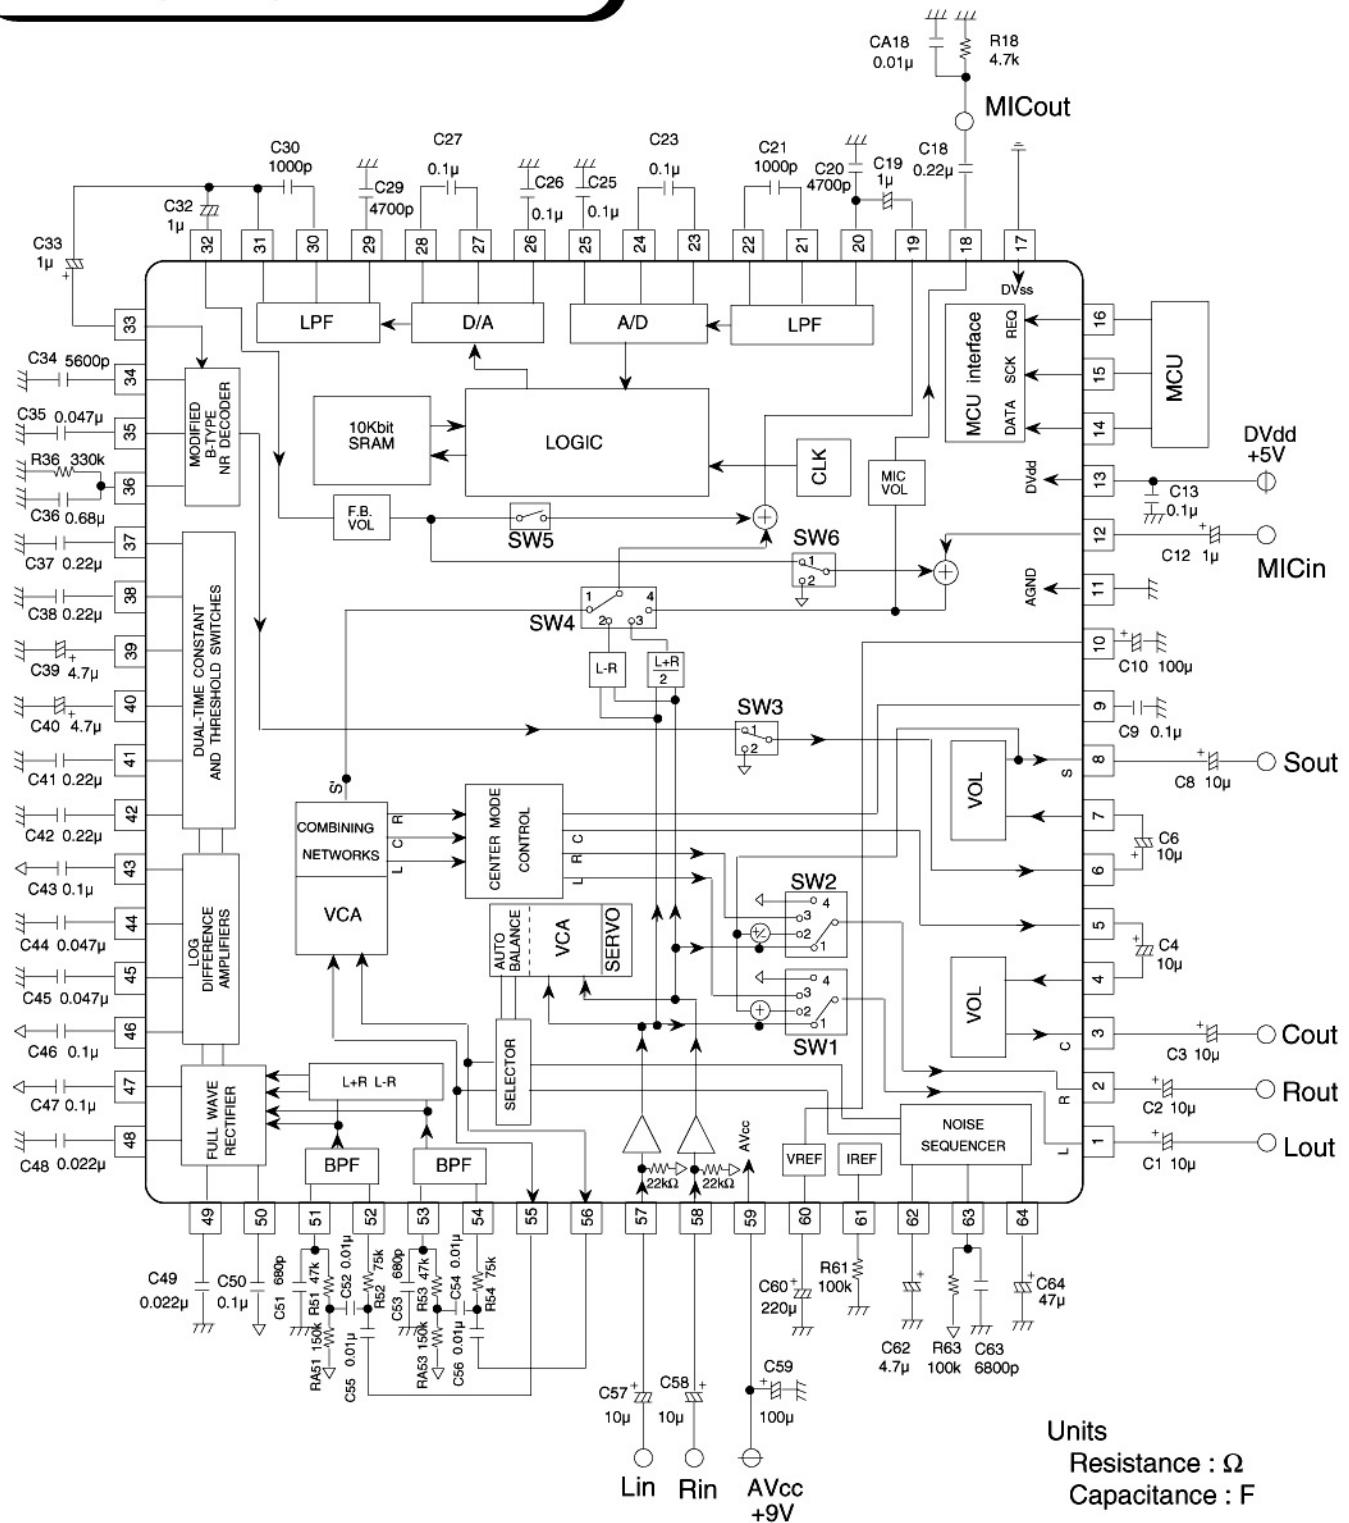

PRELIMINARY
Notice ; This is not a final specification.
some parametric limits are subject to change.

MITSUBISHI SOUND PROCESSORS

M62463AFP
Dolby Pro Logic Surround Decoder

EXTERNAL PARTS LIST

Parts No.	Values	Unit	Tol.	Parts No.	Values	Unit	Tol.
C1	10	µF		C47	0.1	µF	20%
C2	10	µF		C48	0.022	µF	5%
C3	10	µF		C49	0.022	µF	5%
C4	10	µF		C50	0.1	µF	20%
C6	10	µF		C51	680	pF	5%
C8	10	µF		C52	0.01	µF	5%
C9	0.1	µF	10%	C53	680	pF	5%
C10	100	µF		C54	0.01	µF	5%
C12	10	µF		C55	0.01	µF	5%
C13	0.1	µF		C56	0.01	µF	5%
C18	0.22	µF		C57	10	µF	
CA18	0.01	µF		C58	10	µF	
C19	1.0	µF	non-polar	C59	100	µF	
C20	4700	pF	5%	C60	220	µF	
C21	1000	pF	5%	C62	4.7	µF	10%
C23	0.1	µF	5%	C63	6800	pF	5%
C25	0.1	µF	5%	C64	47	µF	
C26	0.1	µF	5%				
C27	0.1	µF	5%				
C29	4700	µF	5%	R18	4.7	kΩ	10%
C30	1000	pF	5%	R36	330	kΩ	10%
C32	1.0	µF		R51	47	kΩ	5%
C33	1.0	µF		RA51	150	kΩ	5%
C34	5600	pF	5%	R52	75	kΩ	5%
C35	0.047	µF	5%	R53	47	kΩ	5%
C36	0.68	µF	10%	RA53	150	kΩ	5%
C37	0.22	pF	10%	R54	75	kΩ	5%
C38	0.22	pF	10%	R61	100	kΩ	1%
C39	4.7	µF	20%	R63	100	kΩ	5%
C40	4.7	µF	20%				
C41	0.22	µF	10%				
C42	0.22	µF	10%				
C43	0.1	µF	20%				
C44	0.047	µF	5%				
C45	0.047	µF	5%				
C46	0.1	µF	20%				