


HOA1873

Transmissive Sensor

FEATURES

- Choice of phototransistor or photodarlington output
- Three sensitivity ranges
- Choice of metal can package or plastic molded components
- 0.100 in. (2.54 mm) slot width

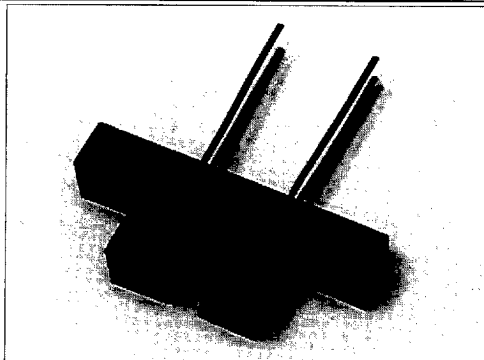

INFRA-13.TIF


DESCRIPTION

The HOA1873 series consists of an infrared emitting diode facing an NPN silicon phototransistor (HOA1873-001, -002, -011, -012) or photodarlington (HOA1873-003, -013) encased in a black thermoplastic housing. Detector switching takes place whenever an opaque object passes through the slot between emitter and detector. The HOA1873-001, -002, and -003 have a 0.050 in. (1.27 mm) dia. detector aperture and employ metal can packaged components, while the HOA1873-011, -012, and -013 have a 0.060 in. (1.52 mm) dia. detector aperture and contain plastic molded components. For additional component information see SE1450, SD1440, SD1410, SEP8506, SDP8406, and SDP8106.

HOA1873-001, 002, 003 housing material is acetal copolymer. HOA1873-011, 012, 013 housing material is polyester. Housings are soluble in chlorinated hydrocarbons and ketones. Recommended cleaning agents are methanol and isopropanol.

OUTLINE DIMENSIONS in inches (mm)

Tolerance 3 plc decimals $\pm 0.010(0.25)$
2 plc decimals $\pm 0.020(0.51)$

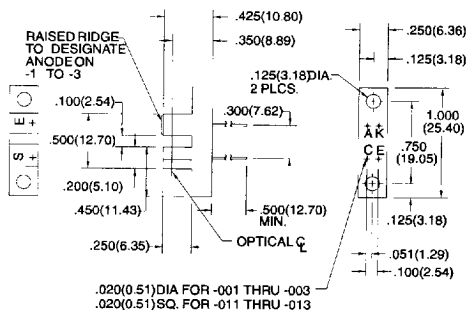

DIM_045.cdr

HOA1873

Transmissive Sensor

ELECTRICAL CHARACTERISTIC (25°C unless otherwise noted)

PARAMETER	SYMBOL	MIN	TYP	MAX	UNITS	TEST CONDITIONS
IR EMITTER						
Forward Voltage	V_F			1.6	V	$I_F=20\text{ mA}$
Reverse Leakage Current	I_R			10	μA	$V_R=3\text{ V}$
DETECTOR						
Collector-Emitter Breakdown Voltage	$V_{(BR)CEO}$	30			V	$I_C=100\text{ }\mu\text{A}$
HOA1873-001, -002, -011, -012		15				
HOA1873-003, -013		5.0				
Emitter-Collector Breakdown Voltage	$V_{(BR)ECO}$				V	$I_E=100\text{ }\mu\text{A}$
Collector Dark Current	I_{CEO}			100	nA	$V_{CE}=10\text{ V}$ $I_F=0$
HOA1873-001, -002, -011, -012				250		
HOA1873-003, -013						
COUPLED CHARACTERISTICS						
On-State Collector Current	$I_{C(ON)}$	0.3			mA	$V_{CE}=5\text{ V}$ $I_F=20\text{ mA}$
HOA1873-001, -011		1.8				
HOA1873-002, -012		4.0				
HOA1873-003, -013						
Collector-Emitter Saturation Voltage	$V_{CE(SAT)}$			0.4	V	$I_F=20\text{ mA}$ $I_C=40\text{ }\mu\text{A}$
HOA1873-001, -011				0.4		$I_C=230\text{ }\mu\text{A}$
HOA1873-002, -012				1.1		$I_C=500\text{ }\mu\text{A}$
HOA1873-003, -013						
Rise And Fall Time	t_r, t_f				μs	$V_{CC}=5\text{ V}, I_C=1\text{ mA}$ $R_L=1000\text{ }\Omega$ $R_L=100\text{ }\Omega$
HOA1873-001, -002, -011, -012			15			
HOA1873-003, -013			75			

ABSOLUTE MAXIMUM RATINGS

(25°C Free-Air Temperature unless otherwise noted)

Operating Temperature Range

HOA1873-001, -002, -003	-55°C to 100°C
HOA1873-011, -012, -013	-40°C to 85°C

Storage Temperature Range

HOA1873-001, -002, -003	-55°C to 125°C
HOA1873-011, -012, -013	-40°C to 85°C

Soldering Temperature

HOA1873-001, -002, -003	260°C (10 sec)
HOA1873-011, -012, -013	240°C (5 sec)

IR EMITTER

Power Dissipation:

HOA1873-001, -002, -003	75 mW ⁽¹⁾
HOA1873-011, -012, -013	100 mW ⁽²⁾

Reverse Voltage

3 V

ABSOLUTE MAXIMUM RATINGS (continued)

Continuous Forward Current

50 mA

DETECTOR

Collector-Emitter Voltage

TRANS. 30 V

DARLINGTON 15 V

Emitter-Collector Voltage

5 V

5 V

Power Dissipation

HOA1873-001, -002, -003	75 mW ⁽¹⁾	75 mW ⁽¹⁾
HOA1873-011, -012, -013	100 mW ⁽²⁾	100 mW ⁽²⁾
Collector DC Current	30 mA	30 mA

Notes

- Derate linearly at 0.71 mW/°C above 25°C.
- Derate linearly at 0.78 mW/°C above 25°C.

Honeywell reserves the right to make changes in order to improve design and supply the best products possible.

4551830 0022676 685
Honeywell

HOA1873

Transmissive Sensor

SCHEMATIC

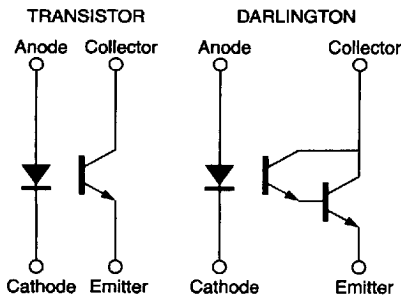


Fig. 2 Non-Saturated Switching Time vs Load Resistance

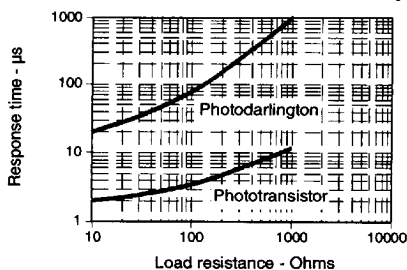


Fig. 4 Collector Current vs Ambient Temperature

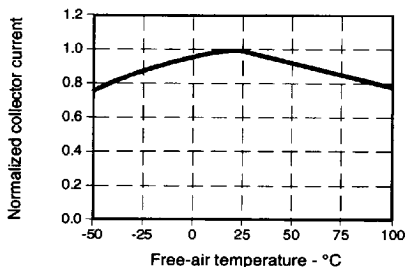


Fig. 1 IRED Forward Bias Characteristics


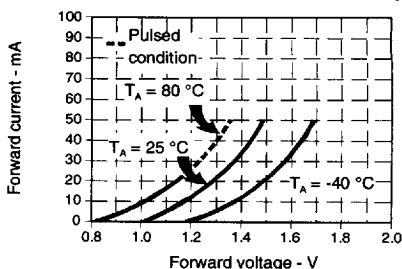


Fig. 3 Dark Current vs Temperature

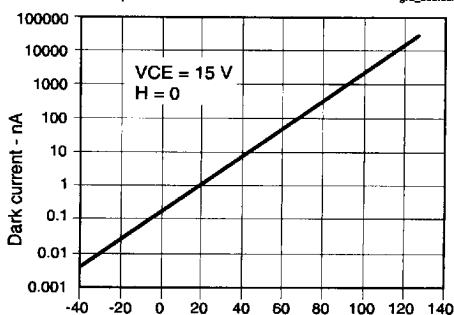

All Performance Curves Show Typical Values

4551830 0022677 511

Honeywell

Honeywell reserves the right to make changes in order to improve design and supply the best products possible.