

MOS INTEGRATED CIRCUIT

μ PD7011

8-BIT NMOS D/A CONVERTER


The μ PD7011 is a low cost 8-bit NMOS digital-to-analog converter using Enhancement Depletion (ED) technology. The μ PD7011 features single +5 V power supply operation and on board voltage reference.

The serial interface option allows easy interface to the μ COM-87, and -75 series of single chip microcomputers and the μ PD7720 Signal Processing chip (SPI). In parallel mode the μ PD7011 is easily connected to the 8080 and 8085 type bus structures by the bus interface facilities.

FEATURES

- E/D NMOS monolithic
- Internal voltage reference
- Serial interface with μ COM-87, -75 and μ PD7720 (SPI)
- Bus interface with 8080 and 8085A-2
- Pure binary and 2's complement code available in serial mode
- Two performance ranges linearity error: μ PD7011C, 1 LSB; μ PD7011C-1, 1/2 LSB
- Single +5 V power supply
- 18-pin plastic DIP (300 mil)

BLOCK DIAGRAM

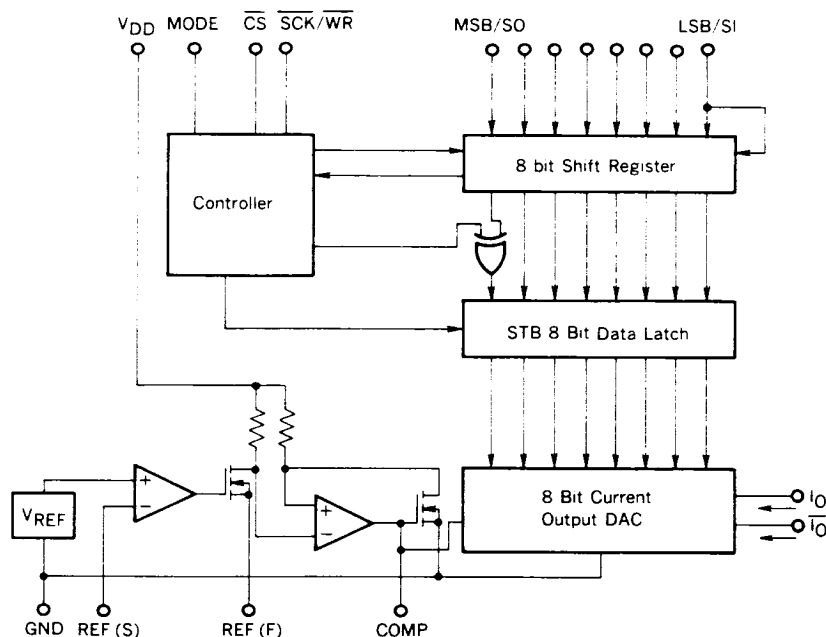


NEC cannot assume any responsibility for any circuits shown or represent that they are free from patent infringement.

© NEC Corporation 1988

/

CONNECTION DIAGRAM (Top View)

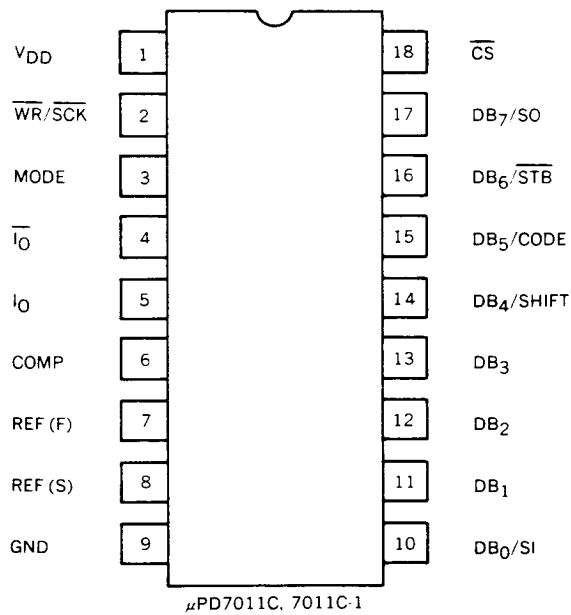

ABSOLUTE MAXIMUM RATINGS (T_a = 25 °C)

Operating Temperature	-20 to +70	°C
Storage Temperature	-65 to +150	°C
Power Supply Voltage	-0.3 to +7.0	V
All Input Voltages	-0.3 to V _{DD} +0.3	V
Power Dissipation	300	mW
SO Pin Pull-up Voltage	V _{DD} +0.3	V
I _O /I _O Output Pull-up Voltage	+10	V

RECOMMENDED OPERATING CONDITIONS ($T_a = +25^\circ\text{C}$)

PARAMETER	SYMBOL	LIMITS			UNIT
		MIN.	TYP.	MAX.	
Supply Voltage	V_{DD}	4.75	5.0	5.25	V
Reference Current	I_{REF}	225	250	275	μA
Full-Scale Current	I_{FS}	0.9	1.0	1.1	mA
Reference Force Terminal Voltage	$V_{REF(F)}$	2.65	2.7	2.75	V
Low-Level Logic Input	V_{IL}	0		0.8	V
High-Level Logic Input	V_{IH}	2.0		V_{DD}	V
Analog Output Pull-up Voltage		2.4		3.0	V
SO Pin 17 Output Pull-up Voltage			V_{DD}		V
Frequency Compensation Capacitor (See Note)	C_{COMP}	0.01	0.1	1.0	μF

Note: Using a frequency compensation capacitor larger than 1 μF will promote low noise operation of the μPD7011C. However, the turn-on time at initial power on will increase.

DC CHARACTERISTICS ($V_{DD} = 5 \pm 0.25$ V, $T_a = 25^\circ\text{C}$, $I_{FS} = 1$ mA, $C_{COMP} = 0.1$ μ F)

PARAMETER	SYMBOL	LIMITS			UNIT	TEST CONDITION
		MIN.	TYP.	MAX.		
Resolution		8	8	8	Bits	-20°C to $+70^\circ\text{C}$
Nonlinearity, 7011C-1	NL		0.25	0.5	LSB	-20°C to $+70^\circ\text{C}$
Nonlinearity, 7011C	NL		0.5	1	LSB	-20°C to $+70^\circ\text{C}$
Differential Nonlinearity	DNL		0.1	1.0	LSB	-20°C to $+70^\circ\text{C}$
Zero-Scale Error				0.5	LSB	-20°C to $+70^\circ\text{C}$
Zero-Scale Symmetry		-1.5	-1.0	-0.5	LSB	Note 1
Gain Error, 7011C-1				3	%FSR	
Gain Error, 7011C				5	%FSR	Note 2
Full-Scale Symmetry		-1.5	-1.0	-0.5	LSB	Note 3
Reference Voltage	$V_{REF(S)}$	1.41	2.0	2.59	V	
Power Supply Current	I_{DD}		7	13	mA	
Logic Input Leakage	I_{ILEAK}		0.1	10	μ A	$0 \leq V_I \leq V_{DD}$
Low-Level Output Voltage	V_{OL}			0.5	V	SO (Pin 17) $I_{SINK} \leq 2$ mA
Output Leakage	I_{OH}		0.1	10	μ A	SO (Pin 17) $V_O = V_{DD}$
Full-Scale Drift			70		PPM/ $^\circ\text{C}$	$\Delta I_O(FS) / \Delta T$
Supply Voltage 7011C-1 Rejection Ratio	SVRR			0.8	%FSR/V	$\Delta I_O(FS) / \Delta T$
Supply Voltage 7011C Rejection Ratio	SVRR			1.2	%FSR/V	$\Delta I_O(FS) / \Delta V_{DD}$
Analog Output Compliance		2.4		8.0	V	$\Delta I_O(FS) \leq 1$ LSB

- Notes:**
1. Zero-scale symmetry is defined as follows:
 $255(I_{O(ZS)} - \overline{I_{O(ZS)}})/I_{O(FS)}$.
 2. Gain error is defined as follows:
 $100(I_{O(FS)} \times 256/255 - 4I_{REF})/4I_{REF}$.
 3. Full-scale symmetry is defined as follows:
 $255(I_{O(ZS)} - \overline{I_{O(ZS)}})/I_{O(FS)}$.

AC RECOMMENDED CONDITIONS ($T_a = 25^\circ\text{C}$, $V_{DD} = 5 \pm 0.25\text{ V}$, Note 1)

PARAMETER	SYMBOL	LIMITS			UNIT	TEST CONDITION
		MIN.	TYP.	MAX.		
Serial Mode						
Serial Clock Setup Time	t _{SKCS}	30			ns	$\overline{SCK} \uparrow \rightarrow \overline{CS} \downarrow$
CS Setup Time	t _{SCSK}	300			ns	$\overline{CS} \downarrow \rightarrow \overline{SCK} \uparrow$
Data Setup Time	t _{SIK}	120			ns	$SI \rightarrow \overline{SCK} \uparrow$
Data Hold Time	t _{HKI}	50			ns	$\overline{SCK} \uparrow \rightarrow SI$
High-Level Serial Clock Pulse Width	t _{WHK}	300			ns	
Low-Level Serial Clock Pulse Width	t _{WLK}	300			ns	
Strobe Hold Time	t _{HKST}	100			ns	$\overline{SCK} \uparrow \rightarrow \overline{STB} \uparrow$
High-Level Strobe Pulse Width	t _{WHST}	200			ns	
Low-Level Strobe Pulse Width	t _{WLST}	200			ns	
Chip Select Hold Time	t _{HKCS}	0			ns	$\overline{SCK} \uparrow \rightarrow \overline{CS} \uparrow$
Serial Clock Hold Time	t _{HCSK}	100			ns	$\overline{CS} \uparrow \rightarrow \overline{SCK} \downarrow$
Strobe Setup Time	t _{SSTCS}	300			ns	$\overline{STB} \uparrow \rightarrow \overline{CS} \downarrow$
Parallel Mode						
Address Setup Time	t _{AW}	0			ns	$\overline{CS} \downarrow \rightarrow \overline{WR} \downarrow$
Low-Level WR Pulse Width	t _{WW}	200			ns	
Address Hold Time	t _{WA}	0			ns	$\overline{WR} \uparrow \rightarrow \overline{CS} \uparrow$
Data Setup Time	t _{DW}	180			ns	$DB \rightarrow \overline{WR} \uparrow$
Data Hold Time	t _{WD}	0			ns	$\overline{WR} \uparrow \rightarrow DB$

Note: $t_r, t_f \leq 50\text{ ns}$.


AC CHARACTERISTICS ($T_a = 25^\circ\text{C}$, $V_{DD} = 5 \pm 0.25\text{ V}$)

PARAMETER	SYMBOL	LIMITS			UNIT	TEST CONDITION
		MIN.	TYP.	MAX.		
Analog Output Setting Time	t_{SET1}		1	3	μs	Parallel Mode, Note 1
	t_{SET2}		1	3	μs	Serial Mode, Note 2
Serial Data Delay Time	t_{DKO}			450	ns	SCK : — SO, Note 2
Delay Time T_D Floating S_O	t_{FCSO}			250	ns	CS : — S_O , High Impedance


Notes: 1. $R_L = 2\text{ k}\Omega$; $C_L = 20\text{ pF}$.
2. $R_L = 2\text{ k}\Omega$; $C_L = 20\text{ pF}$.

TIMING CHART

1. Parallel Mode (MODE = L)

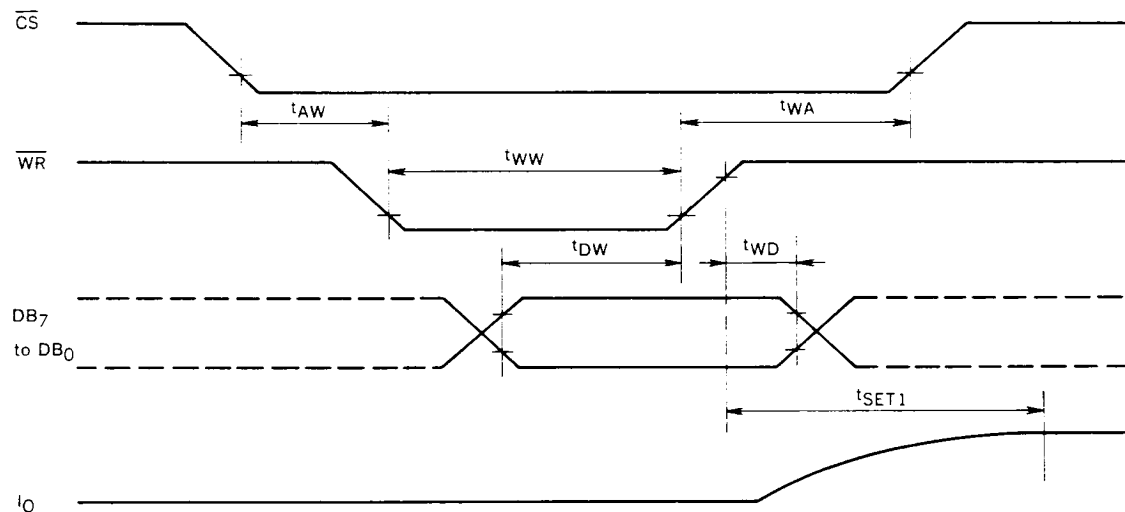


2. Serial Mode (MODE = H)

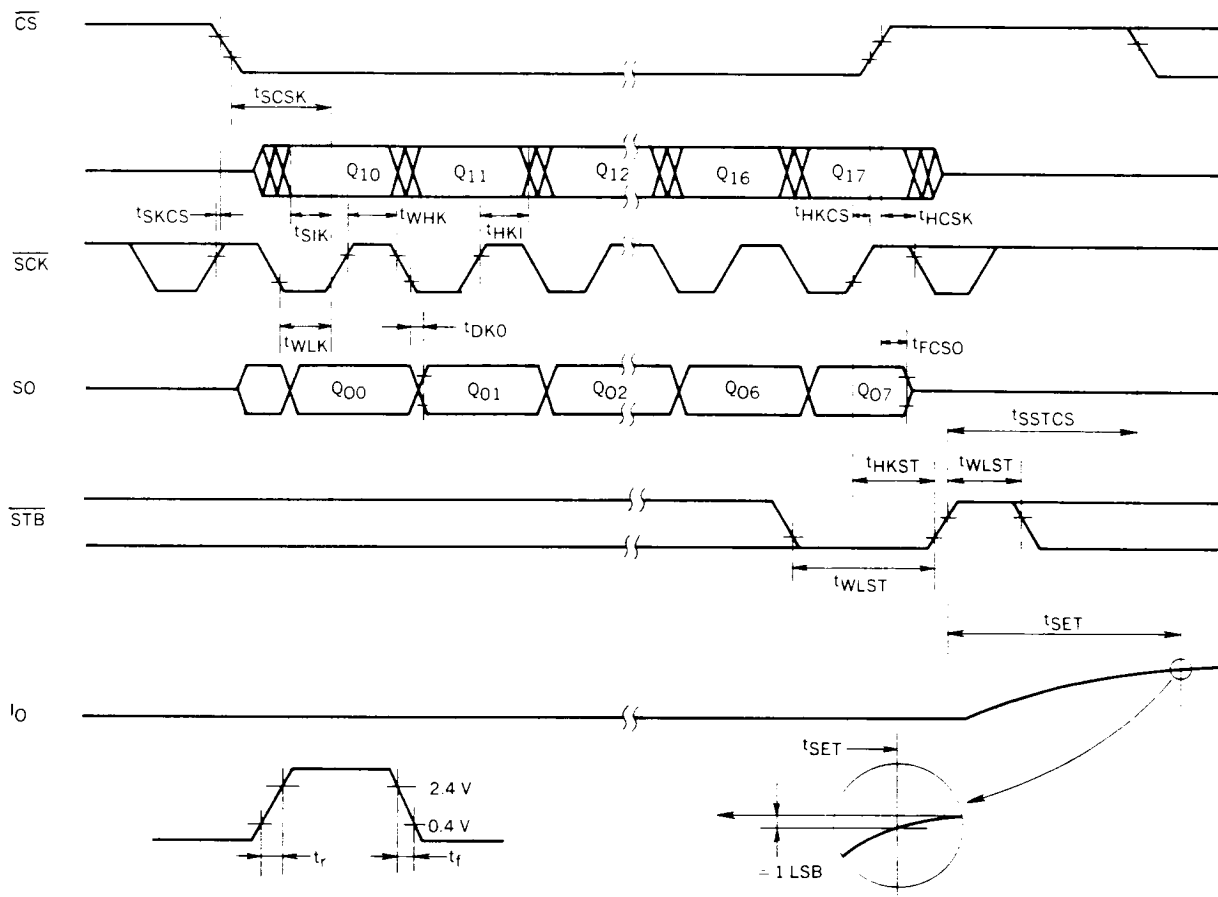


CONTROL BLOCK OPERATION


1. Parallel Mode (MODE = LOW)

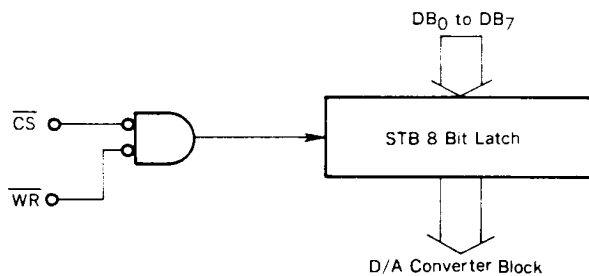

2. Serial Mode, MSB First (SHIFT = MODE = High)

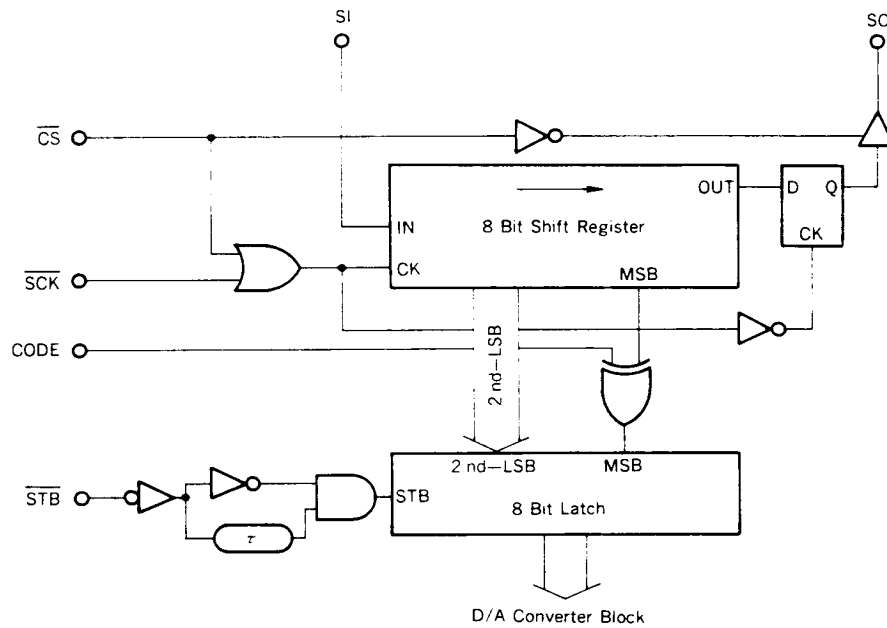


3. Serial Mode, LSB First (SHIFT = Low, MODE = High)

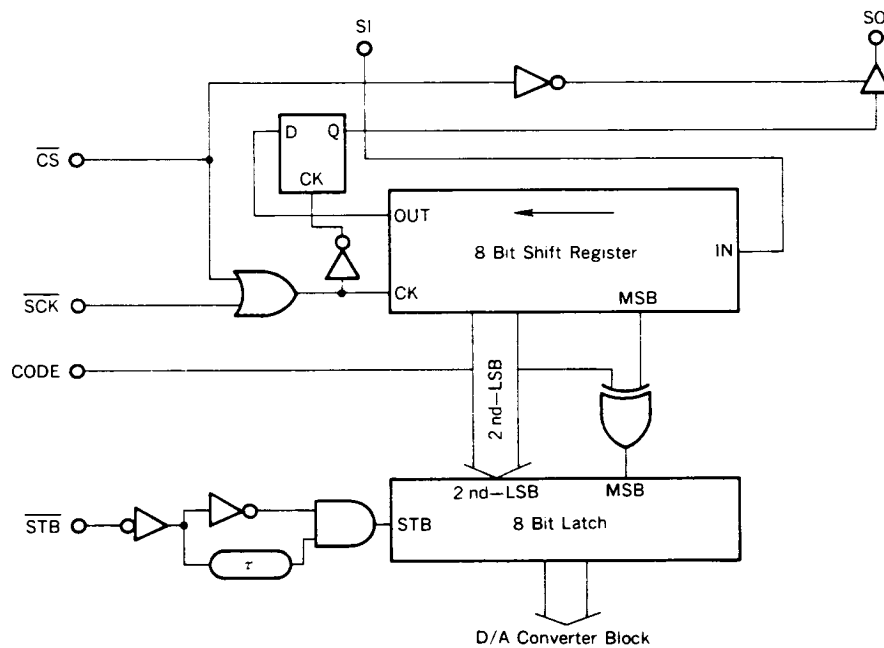

TYPICAL APPLICATIONS

Correction Diagram

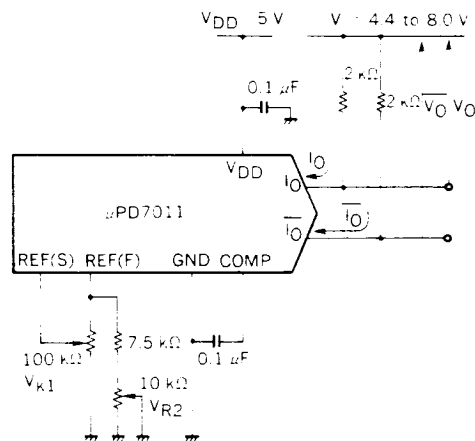

($V_{DD} = 5\text{ V}$, $V^+ = 5\text{ V}$)


Digital Input		I_{OUT} (mA)	$\overline{I_{OUT}}$ (mA)	V_O (V)	$\overline{V_O}$ (V)
MSB	LSB				
1	1	0.996	0.004	1.992	0.008
1	1	0.992	0.008	1.984	0.016
⋮	⋮	⋮	⋮	⋮	⋮
1	0	0.504	0.496	1.008	0.992
1	0	0.500	0.500	1.000	1.000
0	1	0.496	0.504	0.992	1.008
⋮	⋮	⋮	⋮	⋮	⋮
0	0	0.004	0.996	0.008	1.992
0	0	0.000	1.000	0.000	2.000

Adjustment Procedure

- a. Set $V_{REF(F)} = 2.7\text{ V}$ by V_{R1}
- b. After latching full-scale digital input, set $V_O = 2.0\text{ V}$ by V_{R2}

- Notes:
- 1. Both I_O and $\overline{I_O}$ must use pull-up resistors.
 - 2. Use resistors of 1 % accuracy.
 - 3. Capacitive load at $V_{REF(F)}$ pin should be less than 15 pF.


(1) $V_{OUT} = 3 \text{ to } 5 \text{ V}$, $\overline{V_{OUT}} = 5 \text{ to } 3 \text{ V}$

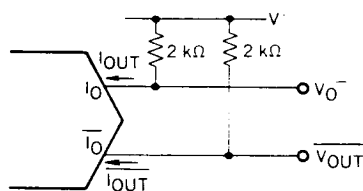

($V_{DD} = V^+ = 5 \text{ V}$)

Digital Input		I_{OUT} (mA)	$\overline{I_{OUT}}$ (mA)	V_{OUT} (V)	$\overline{V_{OUT}}$ (V)
MSB	LSB				
1	1	0.996	0.004	3.008	4.992
1	1	0.992	0.008	3.016	4.984
⋮	⋮	⋮	⋮	⋮	⋮
1	0	0.500	0.500	4.000	4.000
⋮	⋮	⋮	⋮	⋮	⋮
0	0	0.004	0.996	4.992	3.008
0	0	0.000	1.000	5.000	3.000


(2) $V_{OUT} = 0 \text{ to } 3 \text{ V}$

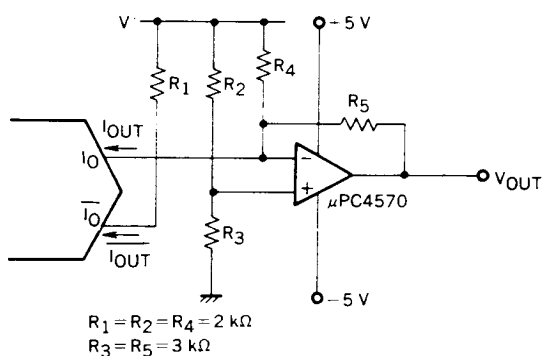

($V_{DD} = V^+ = 5 \text{ V}$)

Digital Input		I_{OUT} (mA)	$\overline{I_{OUT}}$ (mA)	V_{OUT} (V)
MSB	LSB			
1	1	0.996	0.004	2.988
1	1	0.992	0.008	2.976
⋮	⋮	⋮	⋮	⋮
1	0	0.500	0.500	1.500
⋮	⋮	⋮	⋮	⋮
0	0	0.004	0.996	0.012
0	0	0.000	1.000	0.000





(3) $V_{OUT} = 0 \text{ to } 10 \text{ V}$

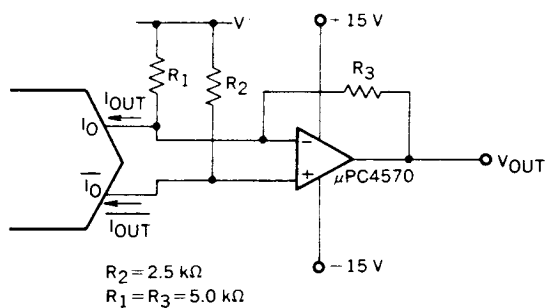


($V_{DD} = V^+ = 5 \text{ V}$)

Digital Input		I_{OUT} (mA)	$\overline{I_{OUT}}$ (mA)	V_{OUT} (V)
MSB	LSB			
1	1	0.996	0.004	9.96
1	1	0.992	0.008	9.92
⋮	⋮	⋮	⋮	⋮
1	0	0.500	0.500	5.00
⋮	⋮	⋮	⋮	⋮
0	0	0.004	0.996	0.04
0	0	0.000	1.000	0.00

OPERATING CHARACTERISTICS ($T_a = 25^\circ\text{C}$)

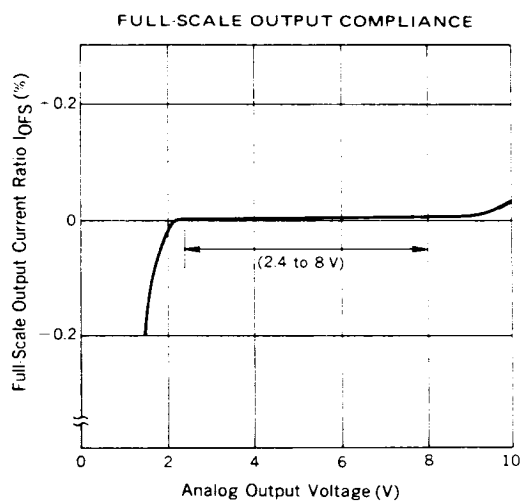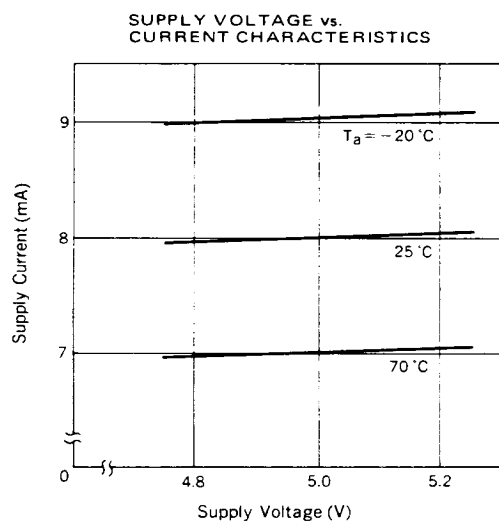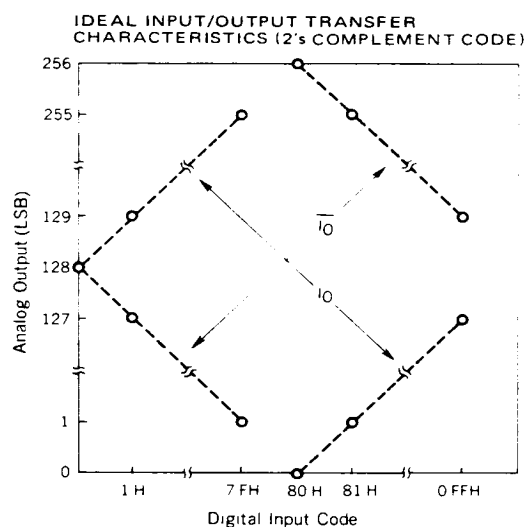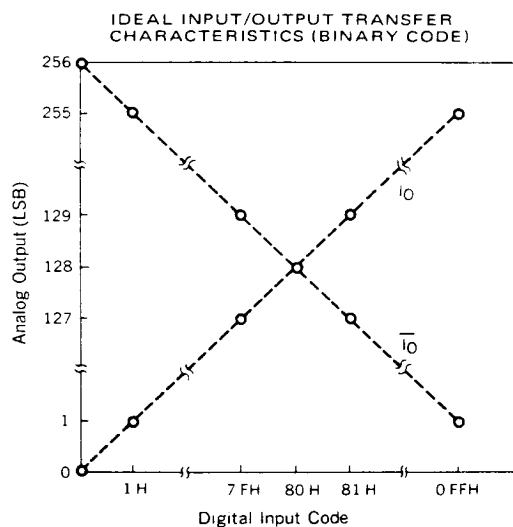

18PIN PLASTIC DIP (300 mil)

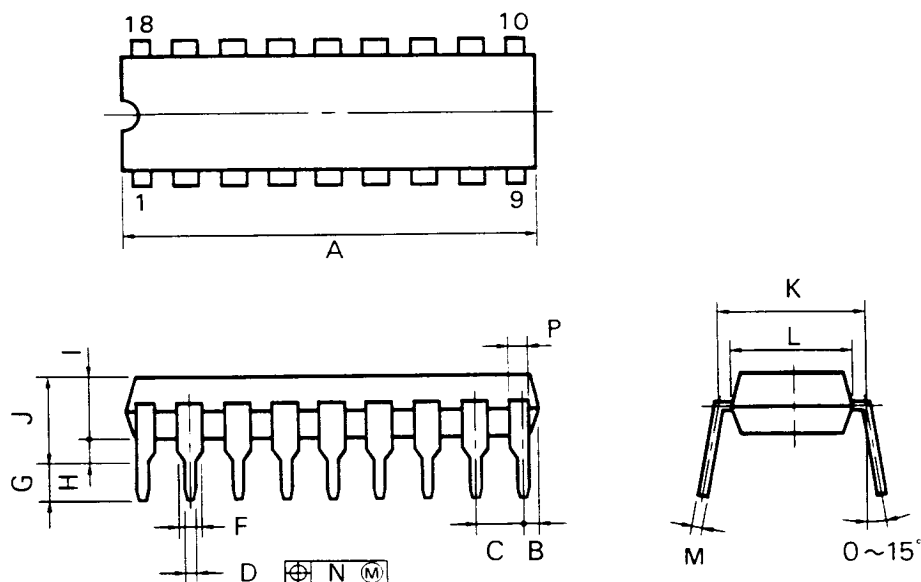

P18C-100-300A.C

NOTES

- 1) Each lead centerline is located within 0.25 mm (0.01 inch) of its true position (T.P.) at maximum material condition.
- 2) Item "K" to center of leads when formed parallel.

ITEM	MILLIMETERS	INCHES
A	22.86 MAX.	0.900 MAX.
B	1.27 MAX.	0.050 MAX.
C	2.54 (T.P.)	0.100 (T.P.)
D	0.50 $^{+0.10}_{-0.00}$	0.020 $^{+0.004}_{-0.000}$
F	1.2 MIN.	0.047 MIN.
G	3.5 $^{+0.3}_{-0.0}$	0.138 $^{+0.012}_{-0.000}$
H	0.51 MIN.	0.020 MIN.
I	4.31 MAX.	0.170 MAX.
J	5.08 MAX.	0.200 MAX.
K	7.62 (T.P.)	0.300 (T.P.)
L	6.4	0.252
M	0.25 $^{+0.10}_{-0.05}$	0.010 $^{+0.004}_{-0.000}$
N	0.25	0.01
P	1.0 MIN.	0.039 MIN.