


SSF-LX25780 SERIES 2.5x7 RECT. PC LED, VERTICAL

FEATURES	APPLICATIONS	MATERIAL SPECIFICATIONS
• Easy P.C. Installation • Choice of Colors, Current • Vertical Position	• Fault Indicator • Back Lighting Indicator • P.C. Mount Indicators	• Holder: Black Nylon, UL V94-0 • Terminations: 0.5mm □ Leads • Installation: P.C. Mount/Solder • Locking Knob

LUMEX PART NBR	EMITTED COLOR		OPERATING CURRENT (mA)	OPERATING TYP Volts (V)	BRIGHTNESS		LED SERIES USED
	PEAK(nm)				TYP (MRD) <i>lx</i>	mA	
SSF-LXH25780ID	RED	635	10-25	2.1	15	20	SSL-LX25783XX
SSF-LXH25780SRD	RED	660	10-25	1.7	70	20	SSL-LX25783XX
SSF-LXH25780GD	GREEN	565	10-25	2.1	16	20	SSL-LX25783XX
SSF-LXH25780YD	YELLOW	585	10-25	2.1	16	20	SSL-LX25783XX
BI-COLOR OPTION							
SSF-LXH25780IGW	RED/GREEN	635/565	10-25	2.1	8/8	20	SSL-LX25783IGW
LOW CURRENT OPTIONS							
SSF-LXH25780LID	RED	635	1-5	1.8	1.5	2	SSL-LX25783L
SSF-LXH25780GDD	GREEN	565	1-5	1.8	1.5	2	SSL-LX25783L
SSF-LXH25780YD	YELLOW	585	1-5	1.8	1.5	2	SSL-LX25783L

See pages 8-14 for Max. operating limits and operating curves

DIMENSIONS (mm/inch)

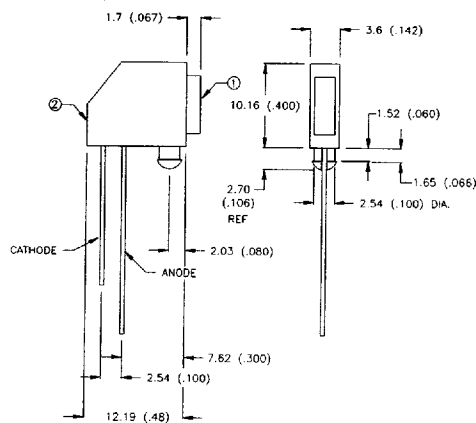

SSF-LXH22573 SERIES 2x5 P.C. LED DUAL PIGGY BACK UNIT


FEATURES	APPLICATIONS	MATERIAL SPECIFICATIONS
• Easy P.C. Installation • Dual Piggy Back Unit • Choice of Colors, Current	• P.C. Mount Indicator • Fault Indicator • Back Lighting Indicator	• Holder: Black Nylon, UL V94-0 • Terminations: 0.5mm □ Leads • Installation: P.C. Mount/Solder

LUMEX PART NBR	EMITTED COLOR		OPERATING CURRENT (mA)	OPERATING TYP Volts (V)	BRIGHTNESS		LED SERIES USED
	PEAK(nm)				TYP (MRD) <i>lx</i>	mA	
SSE-LXH22573ID	RED	635	10-25	2.1	8/8	20	SSL-LX2573XX
SSF-LXH22573SRD	RED	660	10-25	1.7	30/30	20	SSL-LX2573XX
SSF-LXH22573GD	GREEN	565	10-25	2.1	8/8	20	SSL-LX2573XX
SSF-LXH22573YD	YELLOW	585	10-25	2.1	8/8	20	SSL-LX2573XX
LOW CURRENT OPTIONS							
SSF-LXH22573LID	RED	635	1-5	1.8	1/1	2	SSL-LX2573LXX
SSF-LXH22573LGD	GREEN	565	1-5	1.8	1/1	2	SSL-LX2573LXX
SSF-LXH22573LYD	YELLOW	585	1-5	1.8	1/1	2	SSL-LX2573LXX

COLOR COMBINATIONS OPTIONS AVAILABLE

See pages 8-14 for Max. operating limits and operating curves

DIMENSIONS (mm/inch)

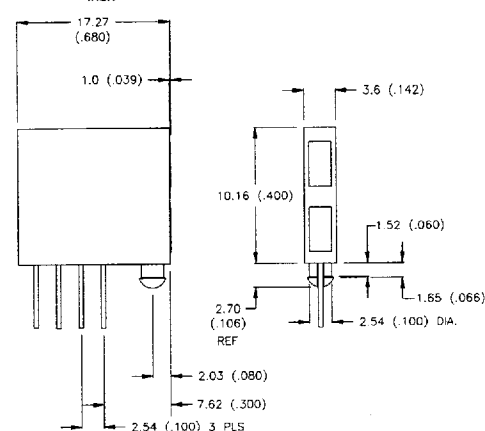

SSF-LXH20049 SERIES 4x6 P.C. LED DUAL PIGGY BACK UNIT

FEATURES	APPLICATIONS	MATERIAL SPECIFICATIONS
• Easy P.C. Installation • Dual Piggy Back Unit • Choice of Colors, Current	• P.C. Mount Indicator • Fault Indicator • Back Lighting Indicator	• Holder: Black Nylon, UL V94-0 • Terminations: 0.5mm □ Leads • Installation: P.C. Mount/Solder

LUMEX PART NBR	EMITTED COLOR		OPERATING CURRENT (mA)	OPERATING TYP Volts (V)	BRIGHTNESS		LED SERIES USED
	PEAK(nm)				TYP (MRD) <i>lx</i>	mA	
SSF-LXH20049ID	RED	635	10-25	2.1	8/8	20	SSL-LX4673XX
SSF-LXH20049SRD	RED	660	10-25	1.7	30/30	20	SSL-LX4673XX
SSF-LXH20049GD	GREEN	565	10-25	2.1	8/8	20	SSL-LX4673XX
SSF-LXH20049YD	YELLOW	585	10-25	2.1	8/8	20	SSL-LX4673XX
LOW CURRENT OPTIONS							
SSF-LXH20049LID	RED	635	1-5	1.8	1/1	2	SSL-LX4673LXX
SSF-LXH20049LGD	GREEN	565	1-5	1.8	1/1	2	SSL-LX4673LXX
SSF-LXH20049LYD	YELLOW	585	1-5	1.8	1/1	2	SSL-LX4673LXX

RATINGS ARE FOR EACH OF TWO UNITS

COLOR COMBINATIONS OPTIONS AVAILABLE

See pages 8-14 for Max. operating limits and operating curves

DIMENSIONS (mm/inch)

