



JIANGSU CHANGJIANG ELECTRONICS TECHNOLOGY CO., LTD

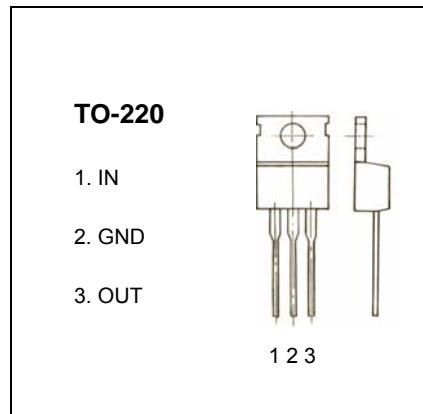
## TO-220 Plastic-Encapsulate Voltage Regulator

## CJ7806 Three-terminal positive voltage regulator

## FEATURES

Maximum Output current  $I_{OM}$ : 1.5 AOutput voltage  $V_o$ : 6 V

Continuous total dissipation

 $P_D$ : 2 W ( $T_J = 25^\circ C$ )

## ABSOLUTE MAXIMUM RATINGS (operating temperature range applies unless otherwise specified)

Parameter	Symbol	Value	Unit
Input Voltage	$V_i$	35	V
Thermal resistance junction-air	$R_{\theta JA}$	65	$^\circ C/W$
Thermal resistance junction-cases	$R_{\theta JC}$	5	$^\circ C/W$
Operating Junction Temperature Range	$T_{OPR}$	0-150	$^\circ C$
Storage Temperature Range	$T_{STG}$	-65-150	$^\circ C$

ELECTRICAL CHARACTERISTICS ( $V_i=11V, I_o=500mA, 0^\circ C < T_j < 125^\circ C, C_i=0.33\mu F, C_o=0.1\mu F$ , unless otherwise specified)

Parameter	Symbol	Test conditions	MIN	TYP	MAX	UNIT
Output voltage	$V_o$	$T_J=25^\circ C$	5.75	6	6.25	V
		$8V \leq V_i \leq 21V, I_o=5mA-1A, P \leq 15W$	5.7	6	6.3	V
Load Regulation	$\Delta V_o$	$T_J=25^\circ C, I_o=5mA-1.5A$		14	120	mV
		$T_J=25^\circ C, I_o=250mA-750mA$		4	60	mV
Line regulation	$\Delta V_o$	$8V \leq V_i \leq 25V, T_J=25^\circ C$		5	120	mV
		$9V \leq V_i \leq 13V, T_J=25^\circ C$		1.5	60	mV
Quiescent Current	$I_q$	$T_J=25^\circ C$		4.3	8	mA
Quiescent Current Change	$\Delta I_q$	$8V \leq V_i \leq 25V$			1.3	mA
		$5mA \leq I_o \leq 1A$			0.5	mA
Output voltage drift	$\Delta V_o/\Delta T$	$I_o=5mA$		-0.8		$mV/^\circ C$
Output Noise Voltage	$V_N$	$10Hz \leq f \leq 100KHz$		45		$\mu V$
Ripple Rejection	$RR$	$9V \leq V_i \leq 19V, f=120Hz, T_j=0-125^\circ C$	59	75		dB
Dropout Voltage	$V_d$	$T_J=25^\circ C, I_o=1A$		2		V
Output resistance	$R_o$	$f=1KHz$		19		$m\Omega$
Short Circuit Current	$I_{SC}$	$V_i=35V, T_J=25^\circ C$		550		mA
Peak Current	$I_{pk}$	$T_J=25^\circ C$		2.2		A

## TYPICAL APPLICATION

