

4825898 INTEGRATED POWER

82D 00224 D T-52-13-25

INTEGRATED POWER SEMICONDUCTORS, LTD.

Ten Channel Half-Bridge Driver


Description

The IP3M02 is a ten channel push-pull driver capable of delivering continuous output currents to 250mA per channel. Each channel is controlled by a TTL compatible logic input and each of the five full-bridge drivers is equipped with an enable input for high impedance output state. A single external resistor allows for chop mode or applications which require more accurate current control. The device is packaged in either a 28 pin SOIC or DIP package.


Features

- Five full H-bridge drivers
- TTL compatible input and enable logic
- External current sense
- Internal flyback protection diodes
- 250mA continuous output currents
- 4.3 to 15V voltage supply range
- Internal thermal shutdown with hysteresis
- 28 pin plastic SOIC or DIP package

Block Diagram

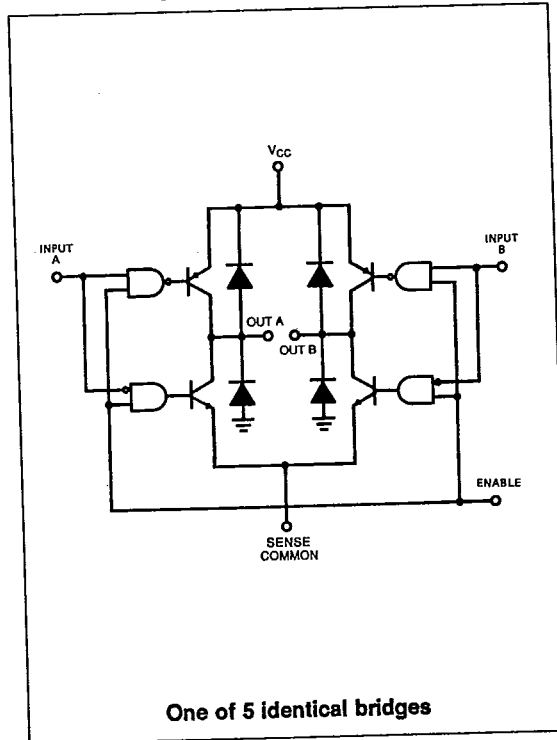

Connections

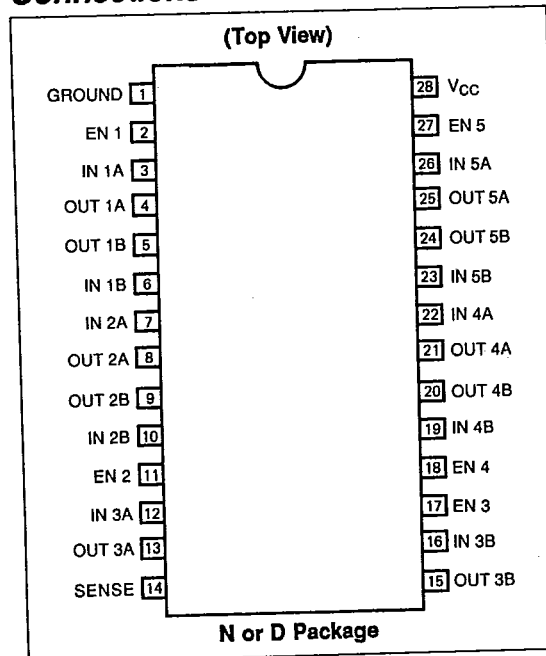
Section 3 - Motor Controllers/Drivers
IP3M02

4825898 INTEGRATED POWER

82D 00225

D

T-52-13-25

Absolute Maximum Ratings ($T_A = 25^\circ\text{C}$)

Supply Voltage, V_{CC}	20V	Operating Ambient Temperature, T_A	0°C to 70°C
Input Voltage, V_{IN}	20V	Maximum Junction Temperature, T_J	150°C
Sense Voltage, V_{SENSE}	0.5V	Storage Temperature, T_S	-65°C to 150°C
Continuous Output Current, I_O	250mA	Peak Non-repetative Output Current, I_{pk} ($t \leq 5$ msec.)	500mA
Max. Power Dissipation, P_D	28 pin DIP 2W 28 pin SOIC 1W		

Absolute maximum ratings are those values beyond which the safety of the device cannot be guaranteed. They are not meant to imply that the devices should be operated at these limits. The electrical characteristics provide conditions for actual device operation.

Electrical Characteristics

(Unless otherwise noted, specifications apply for $4.3\text{V} \leq V_{CC} \leq 15\text{V}$, $I_O = 0\text{mA}$ and $0^\circ\text{C} \leq T_A \leq 70^\circ\text{C}$. Typical values measured at $V_{CC} = 12\text{V}$).

Parameter	Conditions	Min	Typ	Max	Unit
Supply Voltage, V_{CC}		• 4.3		15	V
Supply Current, I_S	EN = H, A _{IN} = H, B _{IN} = L	•	15	20	mA
	EN = H, IN = H	•	30	40	mA
	EN = H, IN = L	•	5	8	mA
	EN = L	•	5	8	mA
Logic Input Low Voltage, V_{IL}		• -0.3		0.8	V
Logic Input High Voltage, V_{IH}		• 2.0		V_S	V
Logic Input Low Current, I_{IL}	$V_{IL} = 0.8\text{V}$	•	-50	-100	μA
Logic Input High Current, I_{IH}	$V_{IH} = 2.0\text{V}$	•	1	10	μA
Output Saturation Voltage, V_{SAT} (Note 2)	$I_O = 250\text{mA}$	•	2.25	2.6	V
	$I_O = 100\text{mA}$	•	1.85	2.2	V
Output Differential Voltage, V_{OD} (Note 3)	$I_O = 250\text{mA}$	•	50	100	mV
	$I_O = 100\text{mA}$	•	20	100	mV
Diode Forward Voltage, V_F	$I_O = 250\text{mA}$	•	1.2	2.0	V
Sense Voltage, V_{SENSE}		• -0.3		0.3	V
Output Leakage Current, I_{LK}	$V_S = 20\text{V}$ per channel, $V_{CC} = 20\text{V}$	•	1	25	μA
Thermal Shutdown Temperature, T_{TSD}	Note 1	• 150	175		$^\circ\text{C}$

The • denotes specifications which apply over the full operating range, all others apply at $T_A = 25^\circ\text{C}$ unless otherwise specified.

Note 1: Guaranteed by design only. Not tested in production.

Note 2: Output Saturation Voltage, V_{SAT} — Output saturation voltage is the total voltage drop across the sink and source output transistors for a given channel. Output saturation voltage is measured under two load conditions and a graph of typical V_{SAT} values is shown in figure 1.

Note 3: Output Differential Voltage, V_{OD} — Output differential voltage is the absolute value of the difference between any two output saturation voltage measurements. For applications which require well matched applied load voltages this parameter specifies the maximum delta in saturation voltages between any two channels. Output differential voltage is measured under two load conditions and a graph of typical and maximum V_{OD} values is shown in figure 3.

4825898 INTEGRATED POWER

82D 00226

D

T-52-13-25

Switching Characteristics $(V_{CC} = 12V, f = 10kHz, I_O = 250mA \text{ and } T_A = 25^\circ C)$

Parameter	Conditions	Min	Typ	Max	Unit
Sink Current Turn-on Delay, t_{on}			900		nS
Sink Current Rise Time, t_r			500		nS
Sink Current Turn-off Delay, t_{off}			350		nS
Sink Current Fall Time, t_f			350		nS
Source Current Turn-on Delay, t_{on}			250		nS
Source Current Rise Time, t_r			200		nS
Source Current Turn-off Delay, t_{off}			550		nS
Source Current Fall Time, t_f			150		nS

Note: Switching times apply for resistive loads only and are not tested in production.

Truth Table

Input	Enable*	Output
H	H	H
L	H	L
H	L	Z
L	L	Z

*Relative to the considered channel
Z = High Impedence**Order Information****Part Number**IP3M02D
IP3M02N**Temperature Range**0°C to 70°C
0°C to 70°C**Package**28 Pin SOIC
28 Pin DIP

Integrated Power Semiconductors, Ltd. cannot assume responsibility for use of any circuitry other than circuitry entirely embodied in an Integrated Power product. No circuit patent licenses are implied. Integrated Power reserves the right to change the circuitry and specifications without notice at any time.

Integrated Power Semiconductors, Ltd.

2727 Walsh Avenue, Suite 201, Santa Clara, CA 95051 • Telephone: 408-727-2772 • Telex: 350073 (IPS SNTA) • FAX: 408-988-6185
 8 Quaker Drive, West Warwick, RI 02893 • Telephone: 401-821-4260 • Telex: 332948 (IPS RI) • FAX: 401-823-7260
 2081 Business Center Drive, Suite 140, Irvine, CA 92715 • Telephone: 714-752-0188 • FAX: 714-752-5019
 789 Turnpike Street, North Andover, MA 01845 • Telephone: 617-683-9042 • FAX: 617-975-0193

