


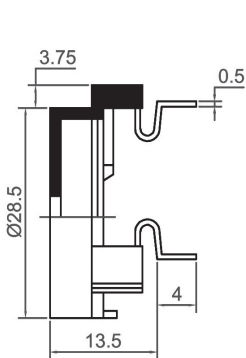


Self Drive Piezo Transducer (AC)






CIT2811




| Canopus Part no. | Operating Voltage (VDC) | Rated Voltage (VDC) | Max Rated Current (mA) | Min Sound Output (dBA) | Resonant Frequency (Hz) | Operating Temperature (°C) | Housing | Terminal | Weight (g) |
|------------------|-------------------------|---------------------|------------------------|------------------------|-------------------------|----------------------------|---------|----------|------------|
| CIT2811H30TP | 3 ~ 24 | 12 | 30 | 75 at 30cm | 3000 ± 500 | -20 ~ +70 | PBT | Pin | 3 |



CIT3010

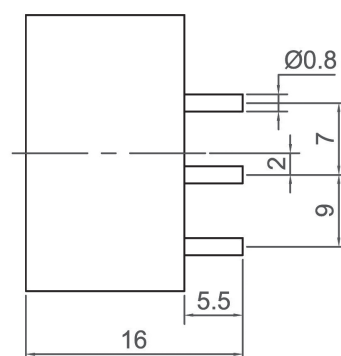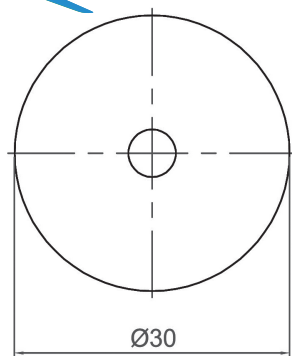


| Canopus Part no. | Operating Voltage (VDC) | Rated Voltage (VDC) | Max Rated Current (mA) | Min Sound Output (dBA) | Resonant Frequency (Hz) | Operating Temperature (°C) | Housing | Terminal | Weight (g) |
|------------------|-------------------------|---------------------|------------------------|------------------------|-------------------------|----------------------------|---------|----------|------------|
| CIT3010H35NP | 3 ~ 20 | 12 | 10 | 88 at 10cm | 3500 ± 500 | -30 ~ +70 | Noryl | Pin | 5 |



CIT3012

| Canopus Part no. | Operating Voltage (VDC) | Rated Voltage (VDC) | Max Rated Current (mA) | Min Sound Output (dBA) | Resonant Frequency (Hz) | Operating Temperature (°C) | Housing | Terminal | Weight (g) |
|------------------|-------------------------|---------------------|------------------------|------------------------|-------------------------|----------------------------|---------|----------|------------|
| CIT3012H27TP | 1.5 ~ 24 | 12 | 12 | 75 at 1m | 2700 ± 500 | -20 ~ +105 | PBT | Pin | 5 |



CANOPUS

Your Efficient Supplier
www.canopus.com.hk

TEL.: (852) 2806 2812

Fax: (852) 2652 2216