

DM54L08/DM74L08 Quad 2-Input AND Gates

General Description

This device contains four independent gates each of which performs the logic AND function.


Absolute Maximum Ratings (Note 1)

Supply Voltage	8V
Input Voltage	5.5V
Storage Temperature Range	- 65°C to 150°C

Note 1: The "Absolute Maximum Ratings" are those values beyond which the safety of the device can not be guaranteed. The device should not be operated at these limits. The parametric values defined in the "Electrical Characteristics" table are not guaranteed at the absolute maximum ratings. The "Recommended Operating Conditions" table will define the conditions for actual device operation.

Connection Diagram

Function Table

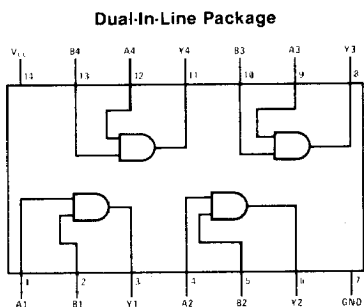

TL/F-6618-1

DM54S08 (J) DM74S08 (N)

$$Y = AB$$

Inputs		Output
A	B	Y
L	L	L
L	H	L
H	L	L
H	H	H

H = High Logic Level
L = Low Logic Level

Recommended Operating Conditions

Symbol	Parameter	DM54L08			DM74L08			Units
		Min	Nom	Max	Min	Nom	Max	
V_{CC}	Supply Voltage	4.5	5	5.5	4.75	5	5.25	V
V_{IH}	High Level Input Voltage	2			2			V
V_{IL}	Low Level Input Voltage			0.7			0.7	V
I_{OH}	High Level Output Current			-0.2			-0.2	mA
I_{OL}	Low Level Output Current			2			3.6	mA
T_A	Free Air Operating Temperature	-55		125	0		70	°C

Electrical Characteristics over recommended operating free air temperature (unless otherwise noted)

Symbol	Parameter	Conditions	Min	Typ (Note 1)	Max	Units
V_I	Input Clamp Voltage	$V_{CC} = \text{Min}, I_I = -12 \text{ mA}$			-1.5	V
V_{OH}	High Level Output Voltage	$V_{CC} = \text{Min}, I_{OH} = \text{Max}$ $V_{IH} = \text{Min}$	2.4	3.3		V
V_{OL}	Low Level Output Voltage	$V_{CC} = \text{Min}$ $I_{OL} = \text{Max}$ $V_{IH} = \text{Min}, V_{IL} = \text{Max}$	DM54	0.15	0.3	V
			DM74	0.2	0.4	
I_I	Input Current@Max Input Voltage	$V_{CC} = \text{Max}, V_I = 5.5 \text{ V}$			0.1	mA
I_{IH}	High Level Input Current	$V_{CC} = \text{Max}, V_I = 2.4 \text{ V}$			10	μA
I_{IL}	Low Level Input Current	$V_{CC} = \text{Max}, V_I = 0.3 \text{ V}$			-0.18	mA
I_{OS}	Short Circuit Output Current	$V_{CC} = \text{Max}$ (Note 2)	DM54	-3	-15	mA
			DM74	-3	-15	
I_{CCH}	Supply Current With Outputs High	$V_{CC} = \text{Max}$		1.1	2.1	mA
I_{CCL}	Supply Current With Outputs Low	$V_{CC} = \text{Max}$		2.0	3.3	mA

Switching Characteristics at $V_{CC} = 5 \text{ V}$ and $T_A = 25^\circ\text{C}$ (See Section 1 for Test Waveforms and Output Load)

Parameter	Conditions	$R_L = 4 \text{ k}\Omega$ $C_L = 50 \text{ pF}$			Units
		Min	Typ	Max	
t_{PLH} Propagation Delay Time Low to High Level Output			45	90	ns
t_{PHL} Propagation Delay Time High to Low Level Output			45	90	ns

Note 1: All typicals are at $V_{CC} = 5 \text{ V}$, $T_A = 25^\circ\text{C}$.

Note 2: Not more than one output should be shorted at a time.