
2


The Ø 22, style 5 range of control and signalling units comprises:

Sub-assemblies for user assembly ZB5-A





Component parts and accessories ZB

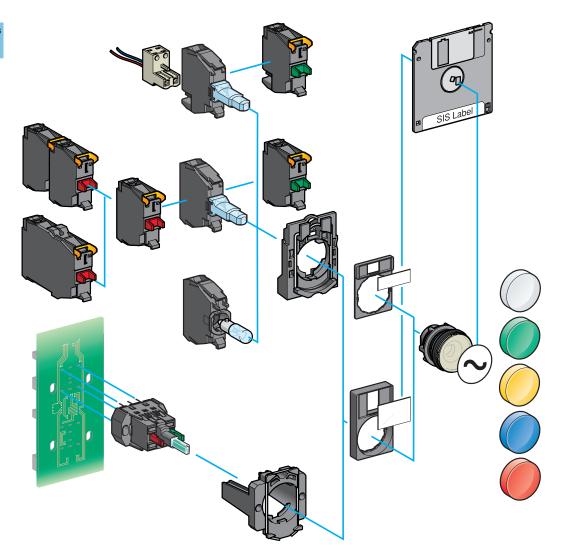


Characteristics: pages 2/6 to 2/9

References: pages 2/10 to 2/47 **Dimensions:** pages 2/48 to 2/55 Televincounique

Harmony® style 5 Pushbuttons, switches and pilot lights, with double insulated bezel

Schematic library

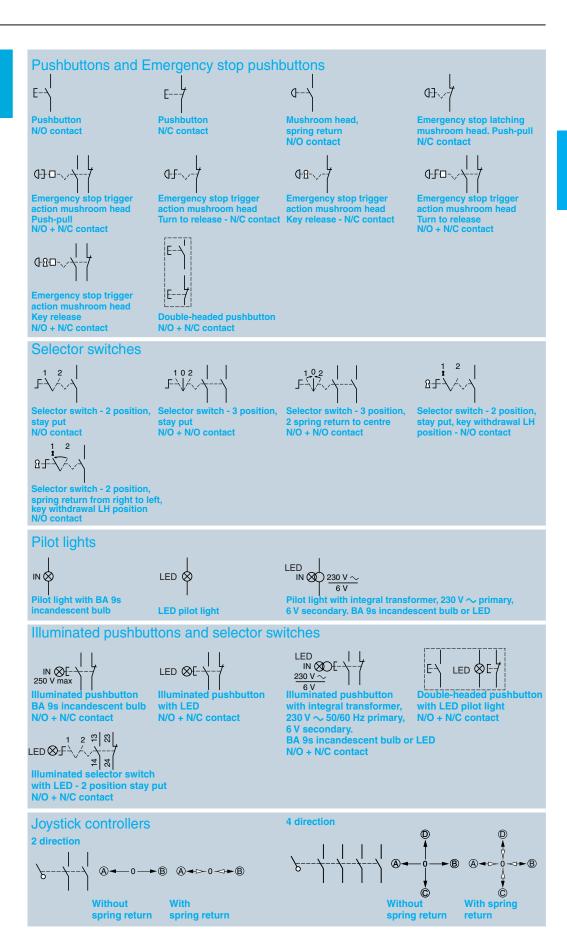

Characteristics: pages 2/6 to 2/9

Schneider Electric

References: pages 2/10 to 2/47 Dimensions: pages 2/48 to 2/55

Harmony® style 5

sub-assemblies

Pushbuttons, switches and pilot lights, with double insulated bezel Sub-assemblies, ZB5-A

Non illuminated units for user assembly

Pushbuttons, spring return, without marking

Pushbuttons, spring return,

"Push-turn" pushbuttons

Double-headed pushbuttons,

"Push-push to release"

spring return

with marking

Contact functions

Body sub-assemblies



Screw clamp terminals age 2/10



Plug-in connector ZB5-AZ10p4/AZ1414

page 2/10



Flush push for insertion of legend

e page 2/11

Flush push

2/11



Projecting push 2/11

Flush push

e page 2/11

Recessed push

Booted flush push 2/11

Projecting push









Flush push 2/12 Projecting push age 2/12

Flush push 2/12



Lockable



Knurled knob (1)
















Flush pushes (IP 40/IP 66) Without/with markings

e page 2/13

ZB5-AA91/AA92 e page 2/13

Flush push + Projecting push (IP 40/IP 66) Without/with markings 2/13

ZB5-AL93/AL94 see page 2/13







2/13

Projecting push

Flush push


Characteristics: pages 2/6 to 2/9

pushbuttons

References: pages 2/10 to 2/47 **Dimensions:** pages 2/48 to 2/55

Harmony® style 5

Pushbuttons, switches and pilot lights, with double insulated bezel Sub-assemblies, ZB5-A



Mushroom head pushbuttons, spring return

Contact functions (continued)

Body sub-assemblies




Screw clamp terminals age 2/10

Plug-in connector

ZB5-AZ10e4/AZ1414 ee page 2/10

Mushroom head pushbuttons, latching





Spring return ee page 2/14




Ø 30 Ø 40 Ø 60



Ø 30 Ø 40 Ø 60

Push-pull ZB5-AT84/ATe/AXe e page 2/15

Turn to release ZB5-AS8•4/AS4•/AS5•/AS6• ee page 2/15



Key release ZB5-AS9e4/AS7e/AS1e/AS2e ee page 2/15



Standard handle (1)






Long blk.handle (1) e page 2/17



Key switches (2) ee page 2/19

(1) Switch handle (2) Key withdrawal and knob positions for key . switches Key withdrawal




















Toggle switches

Selector switches

and key switches



page 2/18

2 positions e page 2/19


Characteristics: pages 2/6 to 2/9


References: pages 2/10 to 2/47

Dimensions: pages 2/48 to 2/55


Harmony® style 5 Pushbuttons, switches and pilot lights, with double insulated bezel Sub-assemblies, ZB5-A

Pilot lights for user assembly

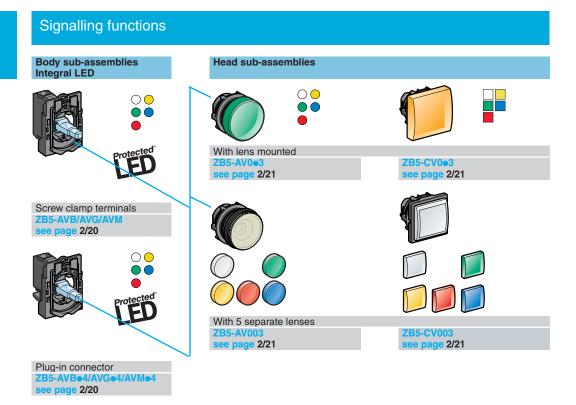



Head sub-assemblies



Harmony® style 5

Pushbuttons, switches and pilot lights, with double insulated bezel Sub-assemblies, ZB5-A

Illuminatedpushbuttons and selector switches for user assembly

Illuminated pushbuttons, spring return

Combined contact and signalling functions

Integral LED



Screw clamp terminals ZB5-AW0B/AW0G/ AW0M e page 2/24





Plug-in connector ZB5-AW0Be ee page 2/26

Illuminated "push-push to release" pushbuttons and illuminated selector switches with standard handle

Illuminated pushbuttons,

spring return

Double headed pushbuttons, spring return, with pilot light

Head sub-assemblies





ZB5-AW3@3/AW9@3



Flush push for insertion of legend



Booted Flush push

ZB5-AW5e3





Projecting push **ZB5-AW1e3/ALe8** ee page 2/29



Flush or projecting push

ZB5-CW3e3/CW1e3 ee page 2/29





Flush pushes Without/with markings ee page 2/30 see page 2/30



Flush push + projecting push Without/with markings

ee page 2/30 see page 2/30











Flush or projecting Selector switches with "push-push to release" standard handle ee page 2/30 e page 2/31

Body sub-assemblies For BA 9s bulb



Direct supply Screw clamp terminals ee page 2/28



Via integral transformer Screw clamp terminals ee page 2/28

Head sub-assemblies





Flush push ee page 2/29





Projecting push ee page 2/29

Characteristics: pages 2/6 to 2/9

Schneider Electric

References: pages 2/10 to 2/47

pages 2/48 to 2/55

Dimensions: