



Insulated BNC Bulkhead Connectors

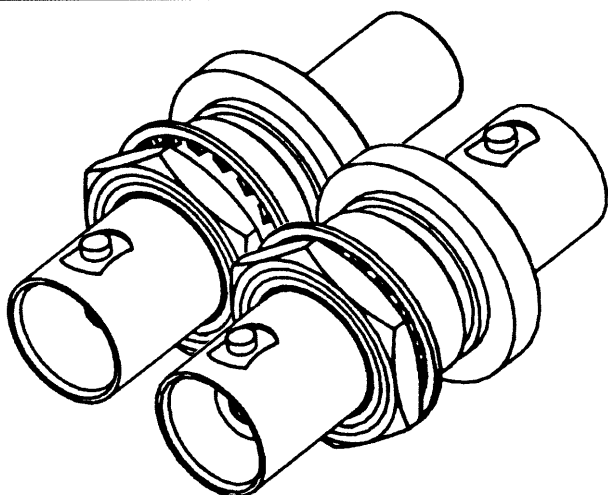


The connectors have a nickel plated brass body and gold plated centre contact, in the case of the bulkhead jack, cable attachment is achieved by crimping. Insulation from the panel is provided by a robust moulding around the connector body giving continuous shielding and an uninterrupted signal path in coaxial systems. Both are designed to be mounted into the industry standard panel cutout using an integral thread and locknut. The thread length is sufficient to accommodate panels up to 7mm thick making them particularly suitable for reinforced face plates.

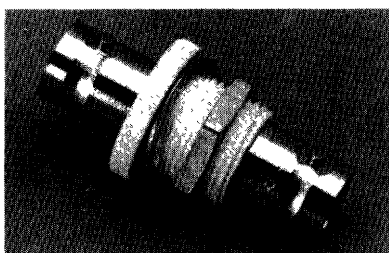

Adaptor



Jack

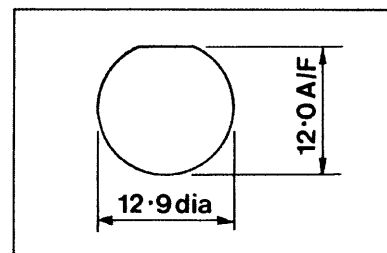

Mounting Detail

Impedance	Cable	Greenpar Cable Group	Part Number	Crimp Tool*
50	RG58	010	B35H51J010X99	30040
50	RG174	022	B35H51J022X99	30040
75	RG59	A25	B37H51JA25X99	30040
75	RG62	B25	B37H51JB25X99	30040
50	Jack to Jack Adaptor		B35R50J999X99	
75			B37R50J999X99	

*Suitable for both contact and braid.

greenpar

Cambridge Road
Harlow
Essex CM20 2ER
Telephone: (0279) 27192
UK Sales: (0279) 39111
Telex: 81404 GRNPAR
Fax: (0279) 415705