

# B5WR Series

## 5 WATT DC/DC CONVERTER, SINGLE & MULTIPLE OUTPUTS



### FEATURES

- ✔ **ECONOMY LINE**
- ✔ **5 WATTS DIP 24 PACKAGE**
- ✔ **2 : 1 WIDE INPUT VOLTAGE RANGE**
- ✔ **REGULATED OUTPUTS**
- ✔ **TYPICAL EFFICIENCY UP TO 85%**
- ✔ **SHORT CIRCUIT PROTECTION**
- ✔ **DIRECT PCB-SOLDERING**
- ✔ **HIGH ISOLATION(4KV AVAILABLE)**
- ✔ **UL94V-0 PACKAGE**

### ELECTRICAL SPECIFICATIONS

All specifications are typical at nominal input, full load

### INPUT SPECIFICATIONS

Input Voltage.....2 : 1  
Input Filter.....PI-Network

### OUTPUT SPECIFICATIONS

Output Voltage Accuracy.....  $\pm 1\%$  typ.  
Efficiency.....83 % typ.  
Over-Current Protection.....Built-in (Automatic Recovery)  
Ripple .....50 mVp-p (DC  
to 100Mhz)  
Line Regulation..... $\pm 0.2\%$   
Line Filter.....Built-in  
Load Regulation..... $\pm 0.5\%$  max.  
(Load Rate 10% ~ 100%)

### GENERAL SPECIFICATIONS

Isolation Voltage.....DC 2KV min  
\* Add /H after P/N for 4KV  
MTBF..... $> 9 \times 10^5$  hours  
Isolation Resistance......1 G $\Omega$  min.

### GENERAL SPECIFICATIONS

Operating Temperature .....-40°C ~ +75°C  
Temperature Coefficient..... $\pm 0.05\%/^{\circ}\text{C}$   
Humidity.....30%~95% RH  
Storage Temperature.....-55°C ~ +85°C

### PHYSICAL SPECIFICATIONS

Case Material.....UL94-0 Plastic  
Dual In-Line Pin Configuration

# ◀ *B5WR Series* ▶


## **5 WATT DC/DC CONVERTER, SINGLE & MULTIPLE OUTPUTS**

MODEL	INPUT VOLTAGE	OUTPUT VOLTAGE	OUTPUT CURRENT	
B5R-1203	12VDC (9 - 18VDC)	3.3 VDC	1200mA	
B5R-1205		5VDC	1000mA	
B5R-1209		9VDC	560mA	
B5R-1212		12VDC	420mA	
B5R-1215		15VDC	340mA	
B5R-1203D		± 3.3VDC	± 600mA	
B5R-1205D		± 5VDC	± 500mA	
B5R-1209D		± 9VDC	± 280mA	
B5R-1212D		± 12VDC	± 210mA	
B5R-1215D		± 15VDC	± 170mA	
B5R-2403		24VDC (18 – 36VDC)	3.3VDC	1200mA
B5R-2405			5VDC	1000mA
B5R-2409	9VDC		560mA	
B5R-2412	12VDC		420mA	
B5R-2415	15VDC		340mA	
B5R-2403D	± 3.3VDC		± 600mA	
B5R-2405D	± 5VDC		± 500mA	
B5R-2409D	± 9VDC		± 280mA	
B5R-2412D	± 12VDC		± 210mA	
B5R-2415D	± 15VDC		± 170mA	
B5R-4803	48VDC (36 – 72VDC)		3.3VDC	1200mA
B5R-4805			5VDC	1000mA
B5R-4809		9VDC	560mA	
B5R-4812		12VDC	420mA	
B5R-4815		15VDC	340mA	
B5R-4803D		± 3.3VDC	± 600mA	
B5R-4805D		± 5VDC	± 500mA	
B5R-4809D		± 9VDC	± 280mA	
B5R-4812D		± 12VDC	± 210mA	
B5R-4815D		± 15VDC	± 170mA	




# B5WR Series

## 5 WATT DC/DC CONVERTER, SINGLE & MULTIPLE OUTPUTS

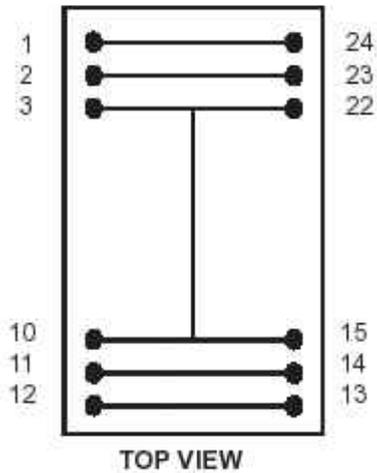

Pin Connections		
PIN	Single Output	Dual Output
2,3	-Vin (GND)	- Vin (GND)
9	No Pin	Common
11	NC	- Vout
14	+ Vout	+ Vout
16	- Vout	Common
22,23	+Vin (Vcc)	+Vin (Vcc)

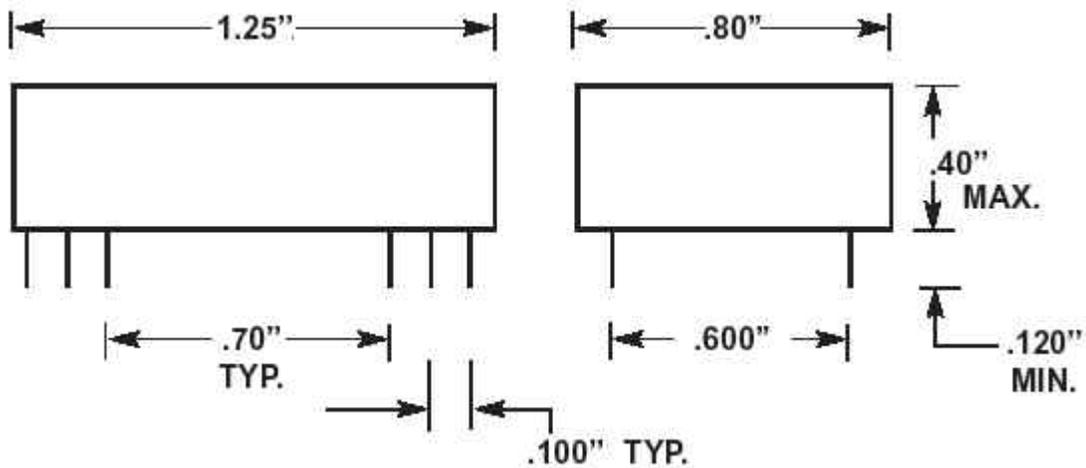

### NOTE:

All dimensions in Metric (mm)

All specifications typical and nominal / full load and 25°C unless otherwise noted.

Avoid sustained operation in overload or dead short conditions.