

GaAs Solid State Relay

DC-2 GHz

SW-368

V 2.00

Features

- High IP2 and IP3 at Low Frequencies
- High Compression Point at Low Frequencies
- Low Insertion Loss

Guaranteed Specifications¹

(From -55° C to +85°C)

Frequency Range		DC - 2.0 GHz		
		RF2- RF1	RF1-RFA1/ RF2-RFA2	
Insertion Loss	DC - 2.0 GHz	1.3 dB	1.0 dB	Max
	DC - 1.0 GHz	1.0 dB	0.7 dB	Max
	DC - 0.5 GHz	0.8 dB	0.5 dB	Max
VSWR (On State) Input/Output	DC - 2.0 GHz	1.9:1	1.9:1	Max
	DC - 1.0 GHz	1.4:1	1.4:1	Max
	DC - 0.5 GHz	1.2:1	1.2:1	Max
Isolation	DC - 2.0 GHz	20 dB	10 dB	Min
	DC - 1.0 GHz	25 dB	15 dB	Min
	DC - 0.5 GHz	30 dB	20 dB	Min

Operating Characteristics


Impedance	50 Ohms Nominal		
Switching Characteristics			
Trise (10% to 90% RF)	27 μ s	Typ	
Tfall (90% to 10% RF)	22 ns	Typ	
Ton (50% CTL-90% RF)	29 μ s	Typ	
Toff (50% CTL-10% RF)	25 ns	Typ	
Transients (In-Band)	63 mV	Typ	
Input Power for 1 dB Compression			
0.5 to 2.0 GHz	30 dBm	Typ	
0.005 – 0.05 GHz	28 dBm	Typ	
Intermodulation Intercept point (for two-tone input power up to +5 dBm)			
Intercept Points	IP2	IP3	
0.5 to 2.0 GHz	+68	+40	dBm Typ
0.005 – 0.05 GHz	+80	+47	dBm Typ
Control Voltage (Complementary Logic)			
Vin Low	-5 to -8V @ 200 μ A Max		
Vin High	+3 to +5V @ 100 μ A Max		

1. All specifications apply with 50 ohm impedance connected to all RF ports with +5 and -5 V control voltages.
2. Above reference insertion loss.
3. Contact the factory for standard or custom screening requirements.

Ordering Information

Model No.	Package
SW-368 PIN	TO-5-4

TO-5-4

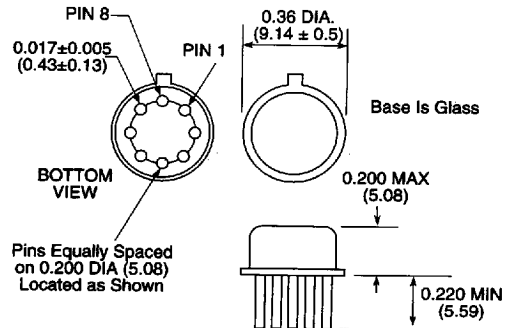


WEIGHT (APPROX.): 0.025 OUNCES 0.7 GRAMS

Bottom of Case is AC Ground
Dimensions in () are in mm.

Unless Otherwise Noted: .xxx = ± 0.010 (.xx = ± 0.25)
.xx = ± 0.02 (.x = ± 0.5)

Functional Schematic (Top View)



Truth Table

Control Input		Condition of Switch		
AC	BC	RF1-RF2	RF1-RFA1	RF2-RFA2
-5	+5	OFF	ON	ON
+5	-5	ON	OFF	OFF

15-158

Specifications Subject to Change Without Notice.

MA-COM, Inc.

North America: Tel. (800) 366-2266
Fax (800) 618-8883

■ Asia/Pacific: Tel. +81 (03) 3226-1671
Fax +81 (03) 3226-1451

■ Europe: Tel. +44 (1344) 869 595
Fax +44 (1344) 300 020




5642205 0002519 392

Absolute Maximum Ratings

Parameter	Absolute Maximum
Max. Input Power	+34 dBm
Control Voltage	+5.5 V, -8.5 V
Operating Temperature	-55°C to +125°C
Storage Temperature	-65°C to +150°C

1. Operation of this device above any one of these parameters may cause permanent damage.

Typical Performance

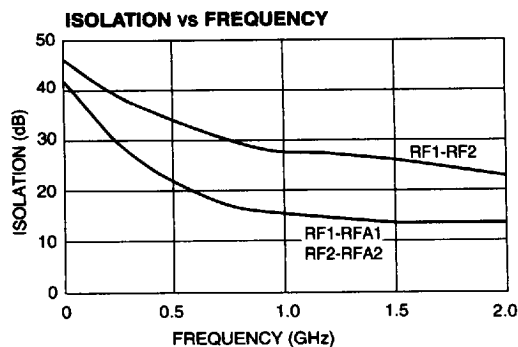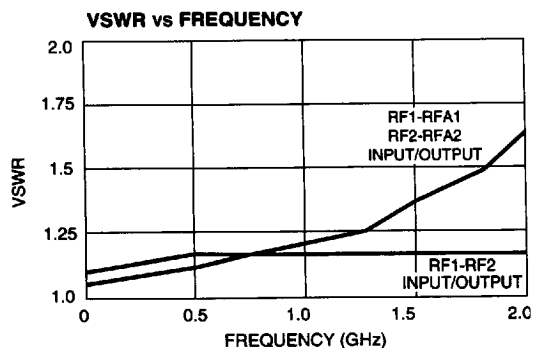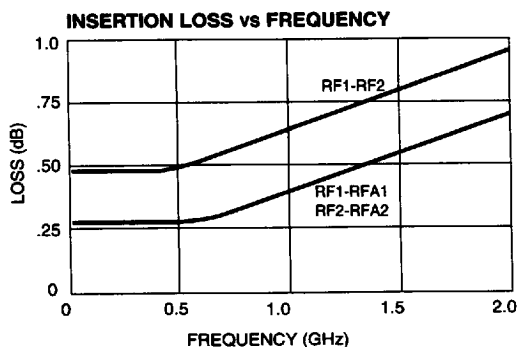

Specifications Subject to Change Without Notice.

M/A-COM, Inc.

15-159

North America: Tel. (800) 366-2266
Fax (800) 618-8883

Asia/Pacific: Tel. +81 (03) 3226-1671
Fax +81 (03) 3226-1451

Europe: Tel. +44 (1344) 869 595
Fax +44 (1344) 300 020

5642205 0002520 004