

For: Use China

3/ May/ 2000



SPECIFICATION AND APPROVALS

- 1) Model Number : 23A MC 36336-001-1501
Multicomp PN#3121677
- 2) Description : Rocker Switch B/B-S Red In-Lay
- 3) Name of Manufacturer: Swann Industries Pte Ltd
- 4) Ratings :

<u>Approval</u>	<u>Certificate No.</u>	<u>Rating</u>
UL	E59618	8A 125VAC 4A 250VAC 16A 12VDC 6A 28VDC
CSA	LR 52381	8A 125VAC 4A 250VAC 6A 28VDC
VDE	60148	4A 250V~
SEMKO	9031076	4A 250V~
- 5) Terminal : 4.8mm Quick Connect
- 6) Circuit : SPST.
- 7) Technical Data :

Recommended panel cut-out	Thickness (mm)	Cut-out size (mm)
	1.0 (min.)	19.3 x 13.0
	3.0 (max.)	19.5 x 13.0
Endurance	Mechanical life >100,000 cycles Life at full load > 20,000 cycles	
Contact gap	μ -gap	
Insulation gap	≥ 8 mm	
Contact resistance	< 20 m Ω	
Insulation resistance	> 50 M Ω (500VDC between the open contacts)	
Dielectric strength	Up to 3.5kV	
Flammability	UL 94V-2 minimum	
Glow wire test	850°C (category D)	
Resistance to tracking	PTI 250	
Soldering Parameters	Soldering iron wattage	50W
	Tip temperature	300°C
	Soldering time	Within 3 sec in "OFF" position.




Issued by :

Date : 29 July 1999

1/2

© COPYRIGHT 1998 BY SPC TECHNOLOGY.
ALL RIGHTS RESERVED. NO PORTION OF
THIS PUBLICATION, WHETHER IN WHOLE
OR IN PART CAN BE REPRODUCED
WITHOUT THE EXPRESS WRITTEN CONSENT
OF SPC TECHNOLOGY.

REVISIONS			DOC. NO. SPC-P004, Total Pages: 2 Effective: 7/18/97, DCP No: 230 Superseding DCP No: 103					
DCP #	REV	DESCRIPTION	DRAWN	DATE	CHECKED	DATE	APPROVED	DATE

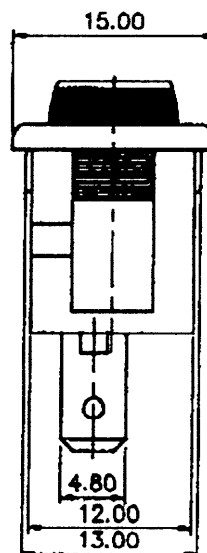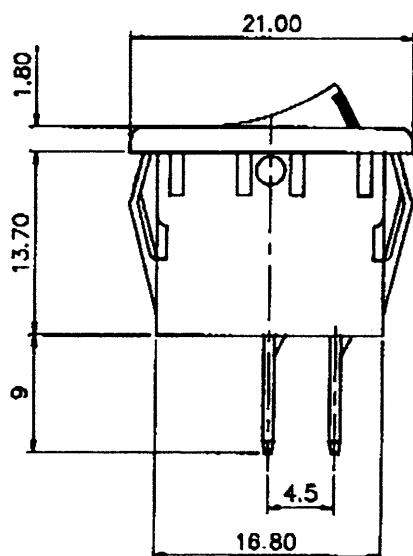

APPROVALS



SPC-P004.DWG

REVISIONS
ALL INFORMATION CONTAINED HEREIN IS BASED UPON INFORMATION
FROM THE MANUFACTURER AND IS NOT TO BE USED FOR ANY OTHER PURPOSE.
UNLESS OTHERWISE SPECIFIED, ALL DIMENSIONS ARE IN MILLIMETERS.

multicomp

	DRAWN BY:	DATE:	DRAWING TITLE:		MULTICOMP PN:	
			23A B/B-S Red In-Lay MC 38336-001-1501		3121677	
	CHECKED BY:	DATE:	SIZE	DWG. NO.	ELECTRONIC FILE	REV
	APPROVED BY:	DATE:	SCALE: 2 : 1		U.O.M.:	
					SHEET: 1 OF	

2/2