


SMD Trimmers

type 3165 series

These cermet element surface mount trimmers feature a cross slot adjustment head for an unbroken perimeter to enable easy vacuum pick-up and auto adjustment. The 3165 series is available in two or three terminal styles. These trimmers are supplied in 12mm blister tape and are suitable for all reflow soldering processes. The 3165 is readily available from within our extensive distribution network.

Key features

- in line terminals
- stable cermet element
- choice of orientation
- only 0.2 grams
- cross slot adjustment style
- low price reduces production costs
- compact size - only 4mm square
- 2 and 3 terminal options

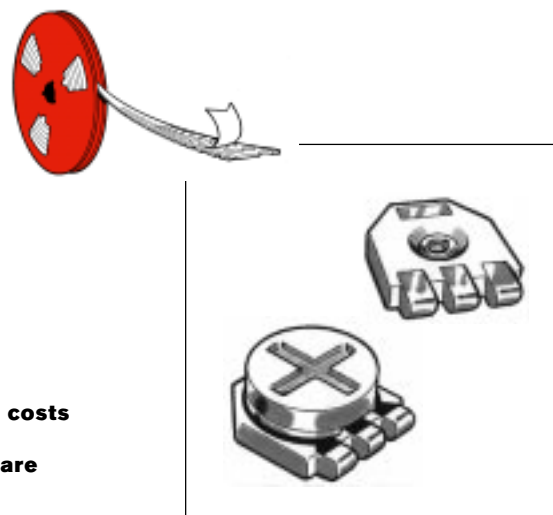

Specification

Electrical

Resistance Range:	100R to 1M (1, 2, 5, in each decade)
Resistance Tolerance:	± 25%
Temperature Coefficient:	± 250ppm°C
Operating Voltage:	50V DC or AC RMS; maximum
Contact Resistance Variation:	5% of nominal, maximum
Power Rating:	0.15 watts at 70°C derating to zero at 85°C
Effective Electrical Angle:	250° ±10°

Mechanical


Rotational Torque:	2 - 20mNm
Mechanical Adjustment:	Continuous

Environmental


Temperature Range:	- 25°C to +85°C
Rotational Life:	20 cycles $\Delta R < 15\%$
Load Life:	$\Delta R < 5\%$ after 1000 hours
Soldering Heat:	250°C 10 seconds, 260°C 5 seconds

Dimensions

3165

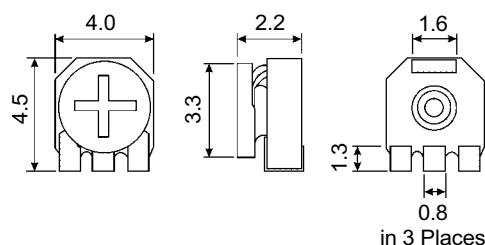

3166



Packaging:
800 Pieces (7" Reel)

How To Order

Common Part	Orientation	Resistance Value	Tolerance
3165 - 3 Terminals in line top adjust	W - Terminals towards sprocket holes	The first two digits are significant figures of resistance value and the third one denotes the number of zeros following	P - ± 25%
3166 - 2 Terminals top adjust			

Please Request Full Data Sheet F0712

sales action desk (01793) 611666
sales fax line (01793) 611777