


Mayday

Directional Xenon or LED beacons

- ☉ Dual voltage 12V/24V
- ☉ High intensity hazard warning lights
- ☉ Brilliant Xenon or LED flash
- ☉ Directional - all light is transmitted in the chosen direction
- ☉ Up to 4 beacons can be synchronised
- ☉ Completely weatherproof to IP65 (when installed)

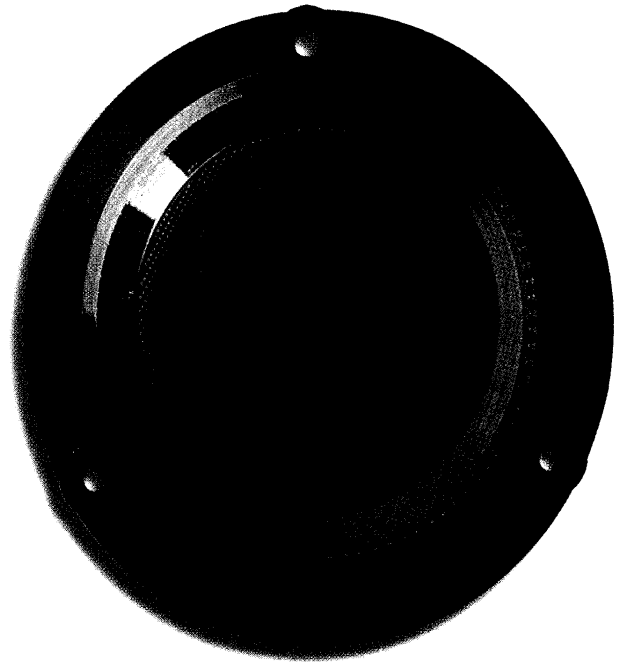

Industrial



Fire



Security



accessories:

Surface Mount / Side Entry Kit available.
Please see separate Accessories Leaflet.

lens colours:

Xenon – Amber, Red or Blue. **LED** – Amber or Red.

technical specification

MODEL	NUMBER	VOLTAGE RANGE	POWER OUTPUT	CURRENT CONSUMPTION	FLASH RATE	WEIGHT	DIMENSIONS OVERALL H X W (mm)
Mayday (Xenon)	SQ4XDV/5	10-30Vdc	5W	12V: 250mA, 24V: 200mA	75/MIN	0.3 Kgs	70 x 148
Mayday (LED)	SQ1XDV/LED	10-30Vdc	–	24mA	60/MIN	0.2 Kgs	70 x 148
Operating temperature: -20° to +55°C							

CE - Complies with EMC Directive 89/336/EEC.

All specifications are nominal and subject to change without notice.

.. simply brilliant



delta design

a division of NICOTECH Limited

Primrose Hill, Kings Langley, Herts WD4 8HD, England.

