

54AC11241, 74AC11241
OCTAL BUFFERS/LINE DRIVERS
WITH 3-STATE OUTPUTS
D2957, JULY 1987 – REVISED APRIL 1993


- 3-State Outputs Drive Bus Lines or Buffer Memory Address Registers
- Flow-Through Architecture Optimizes PCB Layout
- Center-Pin V_{CC} and GND Configurations Minimize High-Speed Switching Noise
- **EPIC™** (Enhanced-Performance Implanted CMOS) 1- μ m Process
- 500-mA Typical Latch-Up Immunity at 125°C
- Package Options Include Plastic Small-Outline Packages, Plastic Shrink Small-Outline Packages, Ceramic Chip Carriers, and Standard Plastic and Ceramic 300-mil DIPs

description


This octal buffer or line driver is designed specifically to improve both the performance and density of three-state memory address drivers, clock drivers, and bus-oriented receivers and transmitters. Taken together with the AC11240 and AC11244, these devices provide the choice of selected combinations of inverting and noninverting outputs, symmetrical $\bar{G}$ (active-low output control) inputs, and complementary G and $\bar{G}$ inputs. This device features a high fan-out.

The 54AC11241 is characterized for operation over the full military temperature range of –55°C to 125°C. The 74AC11241 is characterized for operation from –40°C to 85°C.

54AC11241 . . . JT PACKAGE
74AC11241 . . . DB, DW OR NT PACKAGE
(TOP VIEW)

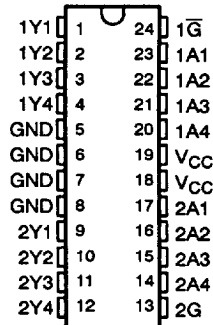

54AC11241 . . . FK PACKAGE
(TOP VIEW)

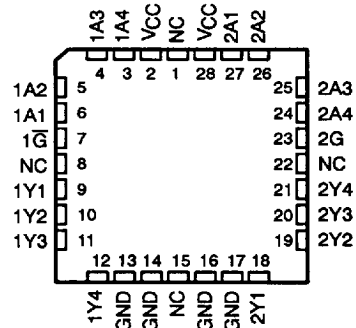

NC – No internal connection

FUNCTION TABLE

OUTPUT CONTROL $1\bar{G}$	DATA INPUT 1A	OUTPUT 1Y	OUTPUT CONTROL 2G	DATA INPUT 2A	OUTPUT 2Y
H	X	Z	L	X	Z
L	L	L	H	L	L
L	H	H	H	H	H

EPIC is a trademark of Texas Instruments Incorporated.

PRODUCTION DATA Information is current as of publication date. Products conform to specifications per the terms of Texas Instruments standard warranty. Production processing does not necessarily include testing of all parameters.

Copyright © 1993, Texas Instruments Incorporated

TEXAS
INSTRUMENTS

POST OFFICE BOX 655303 • DALLAS, TEXAS 75265


2–281

8961723 0094490 477

54AC11241, 74AC11241
OCTAL BUFFERS/LINE DRIVERS
WITH 3-STATE OUTPUTS


D2957, JULY 1987 – REVISED APRIL 1993

logic symbol†

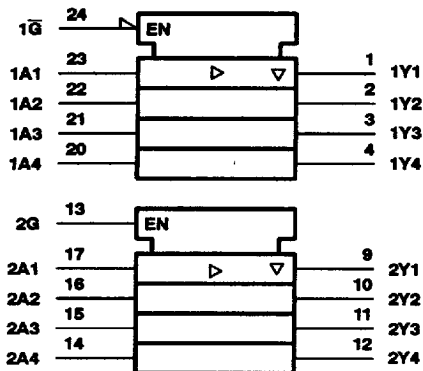

† This symbol is in accordance with ANSI/IEEE Std 91-1984 and IEC Publication 617-12.

logic diagram (positive logic)

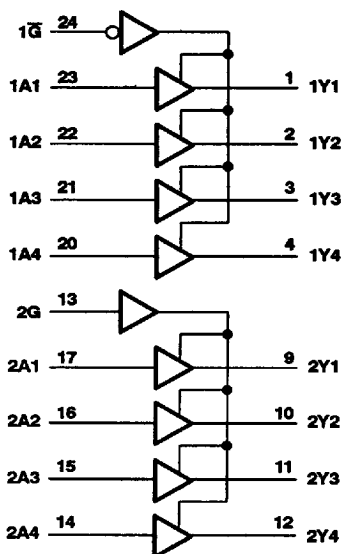

Pin numbers shown are for the DW, JT, and NT packages.

absolute maximum ratings over operating free-air temperature range (unless otherwise noted)‡

Supply voltage range, V_{CC}	-0.5 V to 7 V
Input voltage range, V_I (see Note 1)	-0.5 V to $V_{CC} + 0.5$ V
Output voltage range, V_O (see Note 1)	-0.5 V to $V_{CC} + 0.5$ V
Input clamp current, I_{IK} ($V_I < 0$ or $V_I > V_{CC}$)	± 20 mA
Output clamp current, I_{OK} ($V_O < 0$ or $V_O > V_{CC}$)	± 50 mA
Continuous output current, I_O ($V_O = 0$ to V_{CC})	± 50 mA
Continuous current through V_{CC} or GND	± 200 mA
Storage temperature range	-65°C to 150°C

‡ Stresses beyond those listed under "absolute maximum ratings" may cause permanent damage to the device. These are stress ratings only and functional operation of the device at these or any other conditions beyond those indicated under "recommended operating conditions" is not implied. Exposure to absolute-maximum-rated conditions for extended periods may affect device reliability.

NOTE 1: The input and output voltage ratings may be exceeded if the input and output current ratings are observed.

8961723 0094491 303

TEXAS
INSTRUMENTS

POST OFFICE BOX 655303 • DALLAS, TEXAS 75265

2-282

54AC11241, 74AC11241
OCTAL BUFFERS/LINE DRIVERS
WITH 3-STATE OUTPUTS
D2957, JULY 1987 – REVISED APRIL 1993

recommended operating conditions

			54AC11241			74AC11241			UNIT
			MIN	NOM	MAX	MIN	NOM	MAX	
V _{CC}	Supply voltage		3	5	5.5	3	5	5.5	V
V _{IH}	High-level input voltage	V _{CC} = 3 V	2.1			2.1			V
		V _{CC} = 4.5 V	3.15			3.15			
		V _{CC} = 5.5 V	3.85			3.85			
V _{IL}	Low-level input voltage	V _{CC} = 3 V			0.9			9.9	V
		V _{CC} = 4.5 V			1.35			1.35	
		V _{CC} = 5.5 V			1.65			1.65	
V _I	Input voltage		0		V _{CC}	0		V _{CC}	V
V _O	Output voltage		0		V _{CC}	0		V _{CC}	V
I _{OH}	High-level output current	V _{CC} = 3 V			-4			-4	mA
		V _{CC} = 4.5 V			-24			-24	
		V _{CC} = 5.5 V			-24			-24	
I _{OL}	Low-level output current	V _{CC} = 3 V			12			12	mA
		V _{CC} = 4.5 V			24			24	
		V _{CC} = 5.5 V			24			24	
Δt/Δv	Input transition rise or fall rate	Data	0		10	0		10	ns/V
		$\bar{G}$	0		5	0		5	
T _A	Operating free-air temperature		-55		125	-40		85	°C

electrical characteristics over recommended operating free-air temperature range (unless otherwise noted)

PARAMETER	TEST CONDITIONS	V _{CC}	T _A = 25°C			54AC11241		74AC11241		UNIT
			MIN	TYP	MAX	MIN	MAX	MIN	MAX	
V _{OH}	I _{OH} = -50 μA	3 V	2.9			2.9		2.9		V
		4.5 V	4.4			4.7		4.4		
		5.5 V	5.4			5.4		5.4		
	I _{OH} = -4 mA	3 V	2.58			2.4		2.48		
		4.5 V	3.94			3.7		3.8		
	I _{OH} = -24 mA	5.5 V	4.94			4.7		4.8		
		5.5 V				3.85				
V _{OL}	I _{OL} = 50 μA	3 V			0.1		0.1		0.1	V
		4.5 V			0.1		0.1		0.1	
		5.5 V			0.1		0.1		0.1	
	I _{OL} = 12 mA	3 V			0.36		0.5		0.44	
		4.5 V			0.36		0.5		0.44	
	I _{OL} = 24 mA	5.5 V			0.36		0.5		0.44	
		5.5 V				1.65				
	I _{OL} = 50 mA†	5.5 V					1.65			
	I _{OL} = 75 mA†	5.5 V						1.65		
I _{OZ}	V _O = V _{CC} or GND	5.5 V			± 0.5		± 10		± 5	μA
I _I	V _I = V _{CC} or GND	5.5 V			± 0.1		± 1		± 1	μA
I _{CC}	V _I = V _{CC} or GND, I _O = 0	5.5 V			8		160		80	μA
C _i	V _I = V _{CC} or GND	5 V			4					pF
C _O	V _O = V _{CC} or GND	5 V			10					pF

† Not more than one output should be tested at a time, and the duration of the test should not exceed 10 ms.



8961723 0094492 24T

POST OFFICE BOX 655303 • DALLAS, TEXAS 75265

2-283

54AC11241, 74AC11241
OCTAL BUFFERS/LINE DRIVERS
WITH 3-STATE OUTPUTS

D2957, JULY 1987 – REVISED APRIL 1993

switching characteristics over recommended operating free-air temperature range,
 $V_{CC} = 3.3\text{ V} \pm 0.3\text{ V}$ (unless otherwise noted) (see Figure 1)

PARAMETER	FROM (INPUT)	TO (OUTPUT)	$T_A = 25^\circ\text{C}$			54AC11241		74AC11241		UNIT
			MIN	TYP	MAX	MIN	MAX	MIN	MAX	
t_{PLH}	A	Y	1.5	7	10	1.5	12.2	1.5	11.4	ns
t_{PHL}			1.5	6.2	8.4	1.5	10.2	1.5	9.2	
t_{PZH}	$\bar{G}$ or G	Y	1.5	7.8	11.4	1.5	13.8	1.5	12.9	ns
t_{PZL}			1.5	7.7	10.6	1.5	12.6	1.5	11.7	
t_{PHZ}	$\bar{G}$ or G	Y	1.5	5.8	7.6	1.5	8.2	1.5	7.9	ns
t_{PLZ}			1.5	7.1	9.3	1.5	10.3	1.5	9.9	

switching characteristics over recommended operating free-air temperature range,
 $V_{CC} = 5\text{ V} \pm 0.5\text{ V}$ (unless otherwise noted) (see Figure 1)

PARAMETER	FROM (INPUT)	TO (OUTPUT)	$T_A = 25^\circ\text{C}$			54AC11241		74AC11241		UNIT
			MIN	TYP	MAX	MIN	MAX	MIN	MAX	
t_{PLH}	A	Y	1.5	4.9	7.1	1.5	8.5	1.5	8	ns
t_{PHL}			1.5	4.5	6.3	1.5	7.2	1.5	6.8	
t_{PZH}	$\bar{G}$ or G	Y	1.5	5.4	8	1.5	9.7	1.5	9	ns
t_{PZL}			1.5	5.3	7.6	1.5	9	1.5	8.4	
t_{PHZ}	$\bar{G}$ or G	Y	1.5	4.9	6.6	1.5	7.2	1.5	6.9	ns
t_{PLZ}			1.5	5.6	7.5	1.5	8.3	1.5	8	

operating characteristics, $V_{CC} = 5\text{ V}$, $T_A = 25^\circ\text{C}$

PARAMETER			TEST CONDITIONS		TYP	UNIT
C_{pd}	Power dissipation capacitance per buffer	Outputs enabled	$C_L = 50\text{ pF}$	$f = 1\text{ MHz}$	26	pF
		Outputs disabled			10	


8961723 0094493 186

TEXAS
INSTRUMENTS

2-284

POST OFFICE BOX 655303 • DALLAS, TEXAS 75265

PARAMETER MEASUREMENT INFORMATION

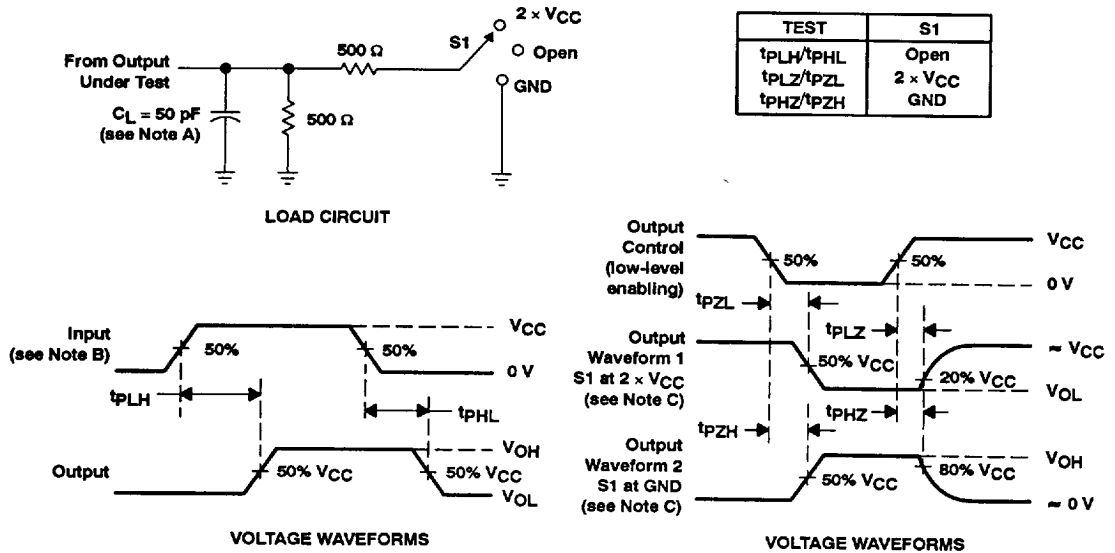

- NOTES: A. C_L includes probe and jig capacitance.
- B. All input pulses are supplied by generators having the following characteristics: PRR $\leq 10 \text{ MHz}$, $Z_O = 50 \Omega$, $t_r = 3 \text{ ns}$, $t_f = 3 \text{ ns}$.
- C. Waveform 1 is for an output with internal conditions such that the output is low except when disabled by the output control. Waveform 2 is for an output with internal conditions such that the output is high except when disabled by the output control.
- D. The outputs are measured one at a time with one input transition per measurement.

Figure 1. Load Circuit and Voltage Waveforms