



CYPRESS
SEMICONDUCTOR

CY7C271
CY7C274

32K x 8 PROM Power-Switched and Reprogrammable

Features

- CMOS for optimum speed/power
- Windowed for reprogrammability
- High speed
 - 30 ns (commercial)
 - 35 ns (military)
- Low power
 - 660 mW (commercial)
 - 715 mW (military)
- Super low standby power
 - Less than 165 mW when deselected
- EPROM technology 100% programmable
- Slim 300-mil package (7C271)
- Direct replacement for bipolar PROMs
- Capable of withstanding >2001V static discharge

Functional Description


The CY7C271 and CY7C274 are high-performance 32,768-word by 8-bit CMOS PROMs. When disabled (CE HIGH), the 7C271/7C274 automatically powers down into a low-power stand-by mode. The CY7C271 is packaged in the 300-mil slim package. The CY7C274 is packaged in the industry standard 600-mil package. Both the 7C271 and 7C274 are available in a cerDIP package equipped with an erasure window to provide for reprogrammability. When exposed to UV light, the PROM is erased and can be reprogrammed. The memory cells utilize proven EPROM floating gate technology and byte-wide intelligent programming algorithms.

The CY7C271 and CY7C274 offer the advantage of lower power, superior performance,


and programming yield. The EPROM cell requires only 12.5V for the super voltage, and low current requirements allow for gang programming. The EPROM cells allow each memory location to be tested 100% because each location is written into, erased, and repeatedly exercised prior to encapsulation. Each PROM is also tested for AC performance to guarantee that after customer programming, the product will meet DC and AC specification limits.

Reading the 7C271 is accomplished by placing active LOW signals on \overline{CS}_1 and \overline{CE} , and an active HIGH on CS_2 . Reading the 7C274 is accomplished by placing active LOW signals on \overline{OE} and \overline{CE} . The contents of the memory location addressed by the address lines ($A_0 - A_{14}$) will become available on the output lines ($O_0 - O_7$).

Logic Block Diagram

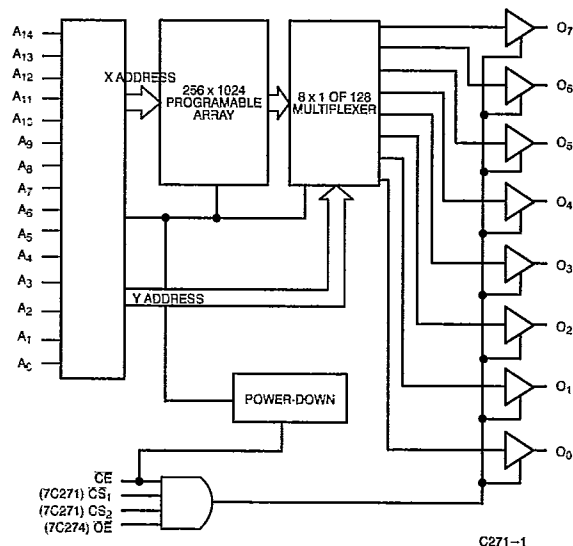

Pin Configurations

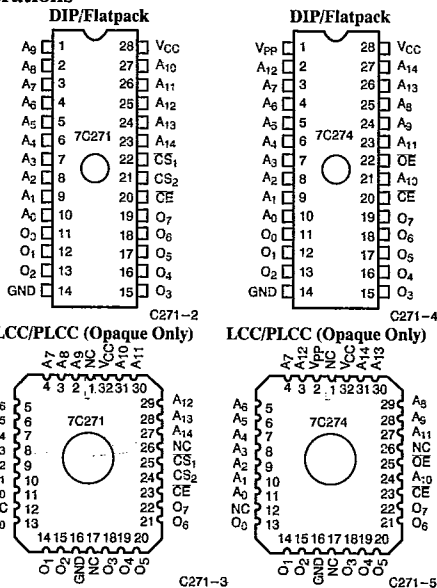

Selection Guide

	7C271-30 7C274-30	7C271-35 7C274-35	7C271-45 7C274-45	7C271-55 7C274-55
Maximum Access Time (ns)	30	35	45	55
Maximum Operating Current (mA)	Com'l 120	120	120	120
	Military 130	130	130	130
Standby Current (mA)	Com'l 30	30	30	30
	Military 40	40	40	40

3

PROMS


CY7C271
CY7C274

Maximum Ratings

(Above which the useful life may be impaired. For user guidelines, not tested.)

Storage Temperature -65°C to $+150^{\circ}\text{C}$
 Ambient Temperature with
 Power Applied -55°C to $+125^{\circ}\text{C}$
 Supply Voltage to Ground Potential -0.5V to $+7.0\text{V}$
 DC Voltage Applied to Outputs
 in High Z State -0.5V to $+7.0\text{V}$
 DC Input Voltage -3.0V to $+7.0\text{V}$
 DC Program Voltage 13.0V
 Static Discharge Voltage $>2001\text{V}$
 (per MIL-STD-883, Method 3015)

Latch-Up Current $>200\text{ mA}$
 UV Exposure 7258 Wsec/cm^2

Operating Range

Range	Ambient Temperature	V _{CC}
Commercial	0°C to $+70^{\circ}\text{C}$	$5\text{V} \pm 10\%$
Industrial ^[1]	-40°C to $+85^{\circ}\text{C}$	$5\text{V} \pm 10\%$
Military ^[2]	-55°C to $+125^{\circ}\text{C}$	$5\text{V} \pm 10\%$

Electrical Characteristics Over the Operating Range^[3]



Parameter	Description	Test Conditions	7C271-30, 35, 45, 55 7C274-30, 35, 45, 55		Unit
			Min.	Max.	
V _{OH}	Output HIGH Voltage	V _{CC} = Min., I _{OH} = -2.0 mA	2.4		V
V _{OL}	Output LOW Voltage	V _{CC} = Min., I _{OL} = 8.0 mA ^[4]		0.4	V
V _{IH}	Input HIGH Level	Guaranteed Input Logical HIGH Voltage for All Inputs	2.0	V _{CC}	V
V _{IL}	Input LOW Level	Guaranteed Input Logical LOW Voltage for All Inputs		0.8	V
I _{IX}	Input Current	GND \leq V _{IN} \leq V _{CC}	-10	$+10$	μA
I _{OZ}	Output Leakage Current	GND \leq V _{OUT} \leq V _{CC} , Output Disabled	-40	$+40$	μA
I _{OS}	Output Short Circuit Current ^[5]	V _{CC} = Max., V _{OUT} = GND	-20	-90	mA
I _{CC}	Power Supply Current	V _{CC} = Max., V _{IN} = 2.0V , I _{OUT} = 0 mA , CE = V _{IL}	Commercial	120	mA
			Military	130	
I _{SB}	Standby Supply Current	V _{CC} = Max., CE = V _{IH} , I _{OUT} = 0 mA	Commercial	30	mA
			Military	40	
V _{PP}	Programming Supply Voltage		12	13	V
I _{PP}	Programming Supply Current			50	mA
V _{IHP}	Input HIGH Programming Voltage		3.0		V
V _{ILP}	Input LOW Programming Voltage			0.4	V

Capacitance^[6]


Parameter	Description	Test Conditions	Max.	Unit
C _{IN}	Input Capacitance	T _A = 25°C , f = 1 MHz , V _{CC} = 5.0V	10	pF
C _{OUT}	Output Capacitance		10	pF

Notes:


1. Contact a Cypress representative for information on industrial temperature range specifications.
2. T_A is the "instant on" case temperature.
3. See the last page of this specification for Group A subgroup testing information.
4. 6.0 mA military
5. For test purposes, not more than one output at a time should be shorted. Short circuit test duration should not exceed 30 seconds.
6. See Introduction to CMOS PROMs in this Data Book for general information on testing.

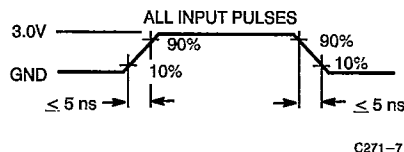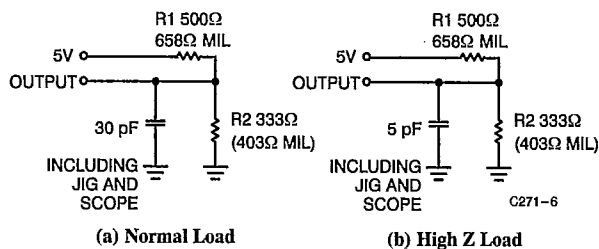
CY7C271
CY7C274
AC Test Loads and Waveforms^[6]


Equivalent to: THÉVENIN EQUIVALENT


Switching Characteristics Over the Operating Range^[3, 6]

Parameter	Description	7C271-30 7C274-30		7C271-35 7C274-35		7C271-45 7C274-45		7C271-55 7C274-55		Unit
		Min.	Max.	Min.	Max.	Min.	Max.	Min.	Max.	
t_{AA}	Address to Output Valid		30		35		45		55	ns
t_{HZCS}	Chip Select Inactive to High Z (\overline{CS}_1 and \overline{CS}_2 , 7C271 Only)		20		25		30		30	ns
t_{ACS}	Chip Select Active to Output Valid (\overline{CS}_1 and \overline{CS}_2 , 7C271 Only)		20		25		30		30	ns
t_{HZOE}	Output Enable Inactive to High Z (\overline{OE} , 7C274 Only)		20		20		25		25	ns
t_{OE}	Output Enable Active to Output Valid (\overline{OE} , 7C274 Only)		20		20		25		25	ns
t_{HZCE}	Chip Enable Inactive to High Z (\overline{CE} Only)		35		40		50		60	ns
t_{ACE}	Chip Enable Active to Output Valid (\overline{CE} Only)		35		40		50		60	ns
t_{PU}	Chip Enable Active to Power Up	0		0		0		0		ns
t_{PD}	Chip Enable Inactive to Power Down		35		40		50		60	ns
t_{OH}	Output Hold from Address Change	0		0		0		0		ns

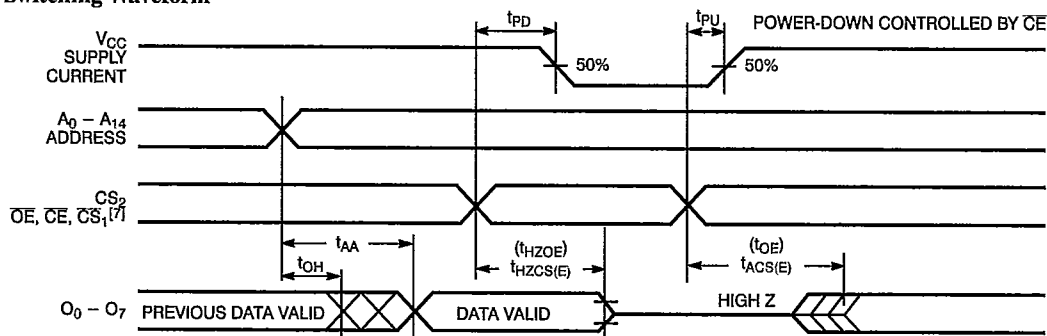Switching Waveform


Note:

 7. \overline{CS}_2 and \overline{CS}_1 are used on the 7C271 only. \overline{OE} is used on the 7C274 only.


CY7C271
CY7C274

Erase Characteristics

Wavelengths of light less than 4000 angstroms begin to erase the 7C271 and 7C274 in the windowed package. For this reason, an opaque label should be placed over the window if the PROM is exposed to sunlight or fluorescent lighting for extended periods of time.

The recommended dose of ultraviolet light for erasure is a wavelength of 2537 angstroms for a minimum dose (UV intensity \times exposure time) of 25 Wsec/cm². For an ultraviolet lamp with a 12 mW/cm² power rating, the exposure time would be approximately 35 minutes. The 7C271 or 7C274 needs to be within 1 inch of the

lamp during erasure. Permanent damage may result if the PROM is exposed to high-intensity UV light for an extended period of time. 7258 Wsec/cm² is the recommended maximum dosage.

Programming Modes

Programming support is available from Cypress as well as from a number of third-party software vendors. For detailed programming information, including a listing of software packages, please see the PROM Programming Information located at the end of this section. Programming algorithms can be obtained from any Cypress representative.

Table 1. CY7C271 Mode Selection

Mode	Pin Function ^[8]					
	Read or Output Disable	A ₁₄ - A ₀	$\overline{\text{CE}}$	CS ₂	CS ₁	O ₇ - O ₀
	Other	A ₁₄ - A ₀	$\overline{\text{VFY}}$	PGM	V _{PP}	D ₇ - D ₀
Read		A ₁₄ - A ₀	V _{IL}	V _{IH}	V _{IL}	O ₇ - O ₀
Power Down		A ₁₄ - A ₀	V _{IH}	X	X	High Z
Output Disable		A ₁₄ - A ₀	X	V _{IL}	X	High Z
Output Disable		A ₁₄ - A ₀	X	X	V _{IH}	High Z
Program		A ₁₄ - A ₀	V _{IHP}	V _{ILP}	V _{PP}	D ₇ - D ₀
Program Verify		A ₁₄ - A ₀	V _{ILP}	V _{IHP} /V _{ILP}	V _{PP}	O ₇ - O ₀
Program Inhibit		A ₁₄ - A ₀	V _{IHP}	V _{IHP}	V _{PP}	High Z
Blank Check		A ₁₄ - A ₀	V _{ILP}	V _{IHP} /V _{ILP}	V _{PP}	O ₇ - O ₀

Table 2. CY7C274 Mode Selection

Mode	Pin Function ^[8]					
	Read or Output Disable	A ₁₄ - A ₀	$\overline{\text{OE}}$	$\overline{\text{CE}}$	V _{PP}	O ₇ - O ₀
	Other	A ₁₄ - A ₀	$\overline{\text{VFY}}$	PGM	V _{PP}	D ₇ - D ₀
Read		A ₁₄ - A ₀	V _{IL}	V _{IL}	Note 9	O ₇ - O ₀
Output Disable		A ₁₄ - A ₀	V _{IH}	X	X	High Z
Power Down		A ₁₄ - A ₀	X	V _{IH}	X	High Z
Program		A ₁₄ - A ₀	V _{IHP}	V _{ILP}	V _{PP}	D ₇ - D ₀
Program Verify		A ₁₄ - A ₀	V _{ILP}	V _{IHP} /V _{ILP}	V _{PP}	O ₇ - O ₀
Program Inhibit		A ₁₄ - A ₀	V _{IHP}	V _{IHP}	V _{PP}	High Z
Blank Check		A ₁₄ - A ₀	V _{ILP}	V _{IHP} /V _{ILP}	V _{PP}	O ₇ - O ₀

Notes:

8. X can be V_{IL} (V_{ILP}) or V_{IH} (V_{IHP}).

9. V_{PP} should be tied to V_{CC} \pm 5% in read mode.



CY7C271

CY7C274

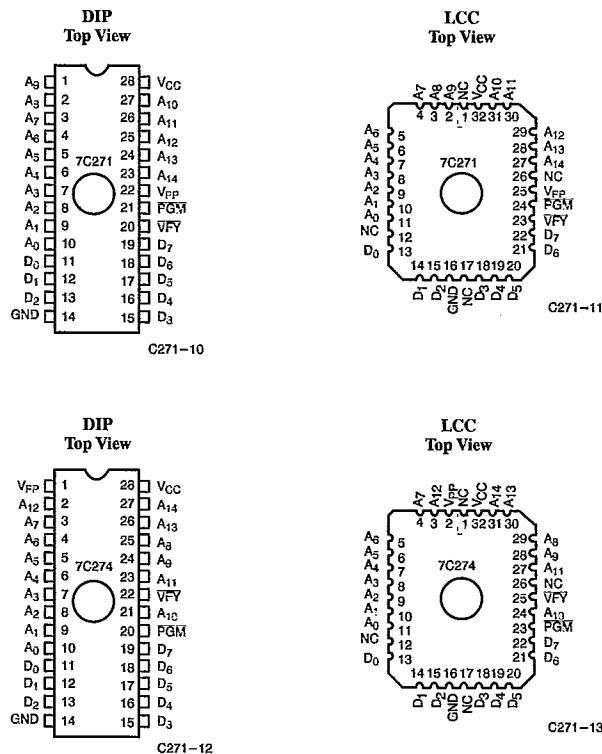



Figure 1. Programming Pinouts




CY7C271
CY7C274

Typical DC and AC Characteristics


**NORMALIZED SUPPLY CURRENT
vs. SUPPLY VOLTAGE**




**NORMALIZED SUPPLY CURRENT
vs. AMBIENT TEMPERATURE**




**NORMALIZED ACCESS TIME
vs. SUPPLY VOLTAGE**




**NORMALIZED ACCESS TIME
vs. TEMPERATURE**




**OUTPUT SOURCE CURRENT
vs. VOLTAGE**




**TYPICAL ACCESS TIME CHANGE
vs. OUTPUT LOADING**

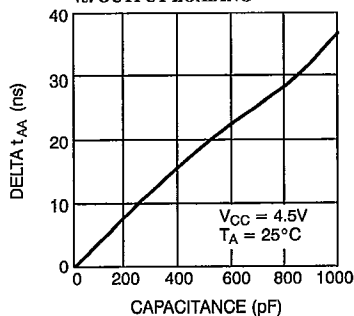

**OUTPUT SINK CURRENT
vs. OUTPUT VOLTAGE**



**NORMALIZED SUPPLY CURRENT
vs. CYCLE PERIOD**



C271-14


CY7C271
CY7C274
Ordering Information^[10]

Speed (ns)	Ordering Code	Package Name	Package Type	Operating Range
30	CY7C271-30JC	J65	32-Lead Plastic Leaded Chip Carrier	Commercial
	CY7C271-30PC	P21	28-Lead (300-Mil) Molded DIP	
	CY7C271-30WC	W22	28-Lead (300-Mil) Windowed CerDIP	
35	CY7C271-35JC	J65	32-Lead Plastic Leaded Chip Carrier	Commercial
	CY7C271-35PC	P21	28-Lead (300-Mil) Molded DIP	
	CY7C271-35WC	W22	28-Lead (300-Mil) Windowed CerDIP	
	CY7C271-35DMB	D22	28-Lead (300-Mil) CerDIP	Military
	CY7C271-35KMB	K74	28-Lead Rectangular Cerpack	
	CY7C271-35LMB	L55	32-Pin Rectangular Leadless Chip Carrier	
	CY7C271-35QMB	Q55	32-Pin Windowed Rectangular Leadless Chip Carrier	
	CY7C271-35WMB	W22	28-Lead (300-Mil) Windowed CerDIP	
45	CY7C271-45JC	J65	32-Lead Plastic Leaded Chip Carrier	Commercial
	CY7C271-45PC	P21	28-Lead (300-Mil) Molded DIP	
	CY7C271-45WC	W22	28-Lead (300-Mil) Windowed CerDIP	
	CY7C271-45DMB	D22	28-Lead (300-Mil) CerDIP	Military
	CY7C271-45KMB	K74	28-Lead Rectangular Cerpack	
	CY7C271-45LMB	L55	32-Pin Rectangular Leadless Chip Carrier	
	CY7C271-45QMB	Q55	32-Pin Windowed Rectangular Leadless Chip Carrier	
	CY7C271-45TMB	T74	28-Lead Windowed Cerpack	
	CY7C271-45WMB	W22	28-Lead (300-Mil) Windowed CerDIP	
55	CY7C271-55JC	J65	32-Lead Plastic Leaded Chip Carrier	Commercial
	CY7C271-55PC	P21	28-Lead (300-Mil) Molded DIP	
	CY7C271-55WC	W22	28-Lead (300-Mil) Windowed CerDIP	
	CY7C271-55DMB	D22	28-Lead (300-Mil) CerDIP	Military
	CY7C271-55KMB	K74	28-Lead Rectangular Cerpack	
	CY7C271-55LMB	L55	32-Pin Rectangular Leadless Chip Carrier	
	CY7C271-55QMB	Q55	32-Pin Windowed Rectangular Leadless Chip Carrier	
	CY7C271-55TMB	T74	28-Lead Windowed Cerpack	
	CY7C271-55WMB	W22	28-Lead (300-Mil) Windowed CerDIP	

Note:

10. Most of these products are available in industrial temperature range. Contact a Cypress representative for specifications and product availability.



CY7C271

CY7C274

Ordering Information^[10] (continued)

Speed (ns)	Ordering Code	Package Name	Package Type	Operating Range
30	CY7C274-30JC	J65	32-Lead Plastic Leaded Chip Carrier	Commercial
	CY7C274-30PC	P15	28-Lead (600-Mil) Molded DIP	
	CY7C274-30WC	W16	28-Lead (600-Mil) Windowed CerDIP	
35	CY7C274-35JC	J65	32-Lead Plastic Leaded Chip Carrier	Commercial
	CY7C274-35PC	P15	28-Lead (600-Mil) Molded DIP	
	CY7C274-35WC	W16	28-Lead (600-Mil) Windowed CerDIP	
	CY7C274-35DMB	D16	28-Lead (600-Mil) CerDIP	Military
	CY7C274-35KMB	K74	28-Lead Rectangular Cerpack	
	CY7C274-35LMB	L55	32-Pin Rectangular Leadless Chip Carrier	
	CY7C274-35QMB	Q55	32-Pin Windowed Rectangular Leadless Chip Carrier	
	CY7C274-35TMB	T74	28-Lead Windowed Cerpack	
	CY7C274-35WMB	W16	28-Lead (600-Mil) Windowed CerDIP	
45	CY7C274-45JC	J65	32-Lead Plastic Leaded Chip Carrier	Commercial
	CY7C274-45PC	P15	28-Lead (600-Mil) Molded DIP	
	CY7C274-45WC	W16	28-Lead (600-Mil) Windowed CerDIP	
	CY7C274-45DMB	D16	28-Lead (600-Mil) CerDIP	Military
	CY7C274-45KMB	K74	28-Lead Rectangular Cerpack	
	CY7C274-45LMB	L55	32-Pin Rectangular Leadless Chip Carrier	
	CY7C274-45QMB	Q55	32-Pin Windowed Rectangular Leadless Chip Carrier	
	CY7C274-45TMB	T74	28-Lead Windowed Cerpack	
	CY7C274-45WMB	W16	28-Lead (600-Mil) Windowed CerDIP	
55	CY7C274-55JC	J65	32-Lead Plastic Leaded Chip Carrier	Commercial
	CY7C274-55PC	P15	28-Lead (600-Mil) Molded DIP	
	CY7C274-55WC	W16	28-Lead (600-Mil) Windowed CerDIP	
	CY7C274-55DMB	D16	28-Lead (600-Mil) CerDIP	Military
	CY7C274-55KMB	K74	28-Lead Rectangular Cerpack	
	CY7C274-55LMB	L55	32-Pin Rectangular Leadless Chip Carrier	
	CY7C274-55QMB	Q55	32-Pin Windowed Rectangular Leadless Chip Carrier	
	CY7C274-55TMB	T74	28-Lead Windowed Cerpack	
	CY7C274-55WMB	W16	28-Lead (600-Mil) Windowed CerDIP	



CY7C271
CY7C274

3
PROMs

MILITARY SPECIFICATIONS

Group A Subgroup Testing

DC Characteristics

Parameter	Subgroups
V_{OH}	1, 2, 3
V_{OL}	1, 2, 3
V_{IH}	1, 2, 3
V_{IL}	1, 2, 3
I_{IX}	1, 2, 3
I_{OZ}	1, 2, 3
I_{CC}	1, 2, 3
I_{SB}	1, 2, 3

Switching Characteristics

Parameter	Subgroups
t_{AA}	7, 8, 9, 10, 11
$t_{AC1}^{[11]}$	7, 8, 9, 10, 11
$t_{OE}^{[12]}$	7, 8, 9, 10, 11
t_{ACE}	7, 8, 9, 10, 11

Notes:

11. 7C274 and 7C271 (\overline{CS}_2 , CS_3 and \overline{CS}_4 only).
12. 7C271 only.

SMD Cross Reference

SMD Number	Suffix	Cypress Number
5962-89817	01XX	CY7C271-55WMB
5962-89817	01YX	CY7C271-55TMB
5962-89817	01ZX	CY7C271-55QMB
5962-89817	02XX	CY7C271-45WMB
5962-89817	02YX	CY7C271-45TMB
5962-89817	02ZX	CY7C271-45QMB

Document #: 38-00068-G

CYPRESS
SEMICONDUCTOR

T-90-20

PLCC and CLCC Packaging for High-Speed Parts

The semiconductor industry is constantly searching for package options that enhance the capabilities of high-performance devices. For fast device performance with minimal ground bounce, electrical characteristics must include low inductance and capacitance from external pin to die bond-wire pad. A package should also furnish good thermal characteristics for reliability over extended temperature ranges.

Other major properties sought after are low cost, as well as standardized outline/pin configurations for compatibility, ease of manufacturing, and handling throughput. The package must also work with surface mount technology and have a small footprint to save board space.

The package that best meets all these requirements is the PLCC (plastic leaded chip carrier). In the past, utilization of PLCCs was not practical for high-power, bipolar devices. However, the advent of low-power bipolar and BiCMOS ECL-compatible SRAMs and PLDs now provides the opportunity for high-volume usage. As manufacturers switch from bipolar to BiCMOS, the lower power dissipation of high-density ECL SRAMs and complex PLDs promise to give PLCC packages a bright future. For military applications and extended temperature environments or for devices with higher power dissipation, you can substitute the CLCC (ceramic leaded chip carrier).

The PLCC has many desirable qualities:

- Suitable for surface mounting with J-type leads
- Small footprint to save board space
- Low inductance and capacitance for high speed with little ground-bounce
- Good thermal characteristics for reliability over temperature range
- Ease of manufacturing and handling for production throughput
- Low cost compared to Cerdip, flatpack, LCC
- Standard package outline and pin-configuration compatibility

The PLCC's J-type surface-mount leads have the advantage over gull-wing leads, which are susceptible to

fatigue. J leads also enhance handling ease in test and burn-in fixtures. The PLCC's 1-pF capacitance compares favorably with the 3 and 6 pF for plastic DIPs and Cerdips, and inductance is equally impressive: 2 nH versus 6 and 11 nH for plastic DIP and Cerdip. Unlike flatpacks, PLCCs are available in standard tooling. PLCCs come in a variety of pin configurations, from 18 to over 200 pins, versus a maximum of 40 pins for plastic DIPs.

The Ceramic Leaded Chip Carrier

For high-temperature environments and high-power devices, you can make use of the ceramic leaded chip carrier (CLCC, Y package), which can also be surface mounted. The Y package has the same footprint and J leads as the PLCC (*Figure 1*) and works well for the faster PLDs and SRAMs.

If you do not know system temperature in the early stages of a design, you can substitute the Y package for the PLCC and vice versa, so long as the device's die junction temperature does not exceed 150°C. The Y package is slightly more expensive than the PLCC, but with a thermal resistance from junction to ambient (θ_{JA}) of 35°C/W at 500 LFPM, the Y package can dissipate heat more efficiently.

Reliability


Cypress's bipolar and BiCMOS products in PLCC and CLCC packages go through extensive burn-in and testing at elevated temperature to guarantee package integrity. Cypress strongly recommends 500-LFPM system forced air flow but guarantees reliability in systems with or without the flow if the ambient air does not cause the junction temperature (T_j) to exceed 150°C.

The PLCC's θ_{JA} is approximately 45°C/W. The SRAMs have power dissipation that ranges from 780 mW max for the CY100E422L-5 up to 1097 mW max for the CY10E474L-5. This dissipation results in junction temperature rises from 35 to 49°C. The 16P4-type PLD (CY100E302L-6) has a temperature rise of 39°C, and the



28-Lead Plastic Leaded Chip Carrier J64

T-90-20

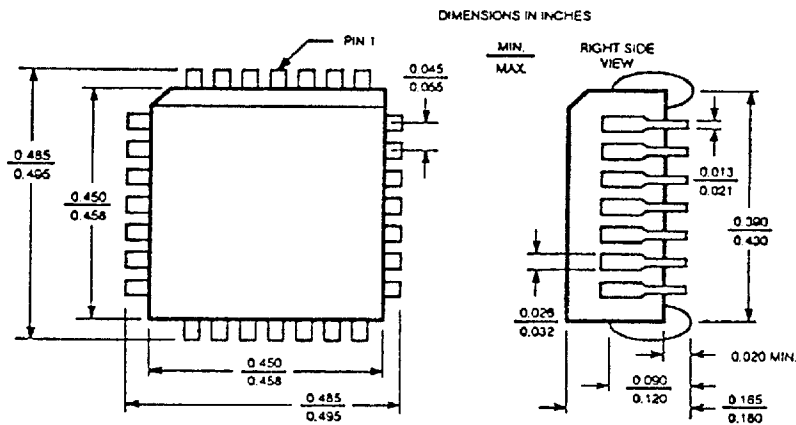

28-Pin Ceramic Leaded Chip Carrier Y64

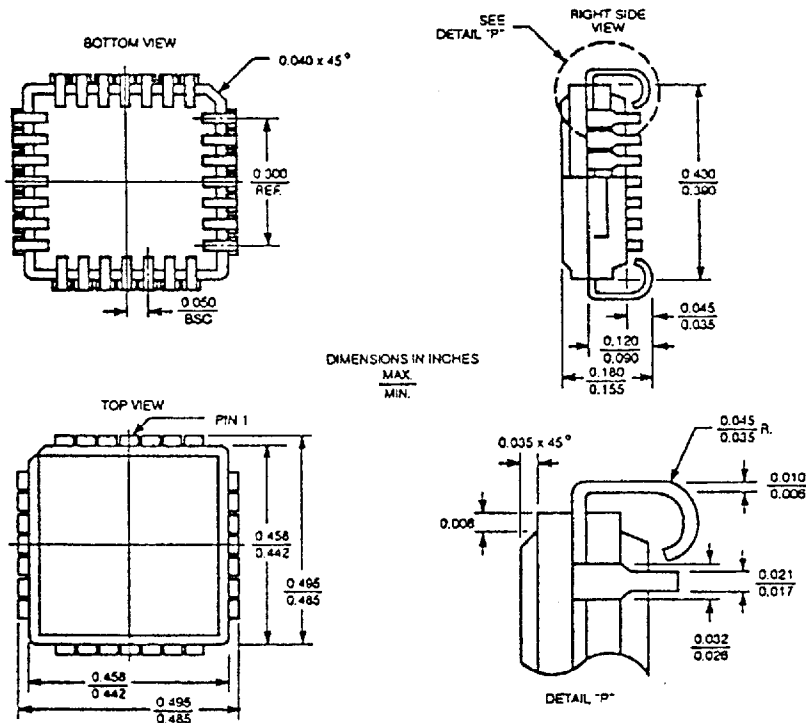


Figure 1. Diagrams of 28-Lead Chip Carriers



16P8-type PLD (CY10E301L-6) has a temperature rise of 47°C. The CLCC package's Θ_{JA} equals 35°C/W for temperature rises of up to 55°C (CY10E474-3).

Finding Chip-Level Junction Temperature

The following relationship determines chip-level junction temperature for the PLCC package:

$$T_J = \Delta T + T_A$$

where

$$\Delta T = P_D \times \Theta_{JA}$$

and

$$\Theta_{JA} = \Theta_{JC} + \Theta_{CS} + \Theta_{SA}$$

To calculate worst case junction temperature (T_J) use maximum supply V_{EE} and I_{EE} for power dissipation and maximum T_A for the temperature range of interest. For the 10K/10KH CY10E301L in a PLCC, for example, device $I_{EE} = 170$ mA max and $V_{EE} = 5.46$ V max for $P_D = 928$ mW. Add 15 mW per output for a total output $P_D = 120$ mW. Therefore, the total $P_D = 1048$ mW.

For a PLCC, $\Theta_{JA} = 45^\circ\text{C/W}$ at 500 LFPM, and $\Theta_{JA} = 64^\circ\text{C/W}$ for still air.

For a CLCC, $\Theta_{JA} = 35^\circ\text{C/W}$ at 500 LFPM, and $\Theta_{JA} = 54^\circ\text{C/W}$ for still air.

Because

$$T_J = \text{total } P_D \times \Theta_{JA} + T_A$$

and

$T_A = 75^\circ\text{C}$ worst-case commercial temperature range, for the PLCC:

$$T_J = (1.048 \text{ W})(45^\circ\text{C/W}) + 75^\circ\text{C} = 122^\circ\text{C at 500 LFPM}$$

$$T_J = (1.048 \text{ W})(64^\circ\text{C/W}) + 75^\circ\text{C} = 142^\circ\text{C in still air}$$

This calculation is for absolute worst-case data sheet conditions. The burn-in temperature used by Cypress (T_J) is much higher than the device will ever see in a system. Note that *most systems will not run at worst case due to guard-banding*. For this reason, use $V_{EENOM} = 5.2$ V or 4.5 V and $I_{EENOM} = (I_{EEMAX})(85\%)$ for nominal-condition calculations.

Real-World Values

Obviously, most systems do not operate at the worst-case conditions. Therefore, Figures 2 through 5 show graphs over different operating conditions to determine failures in time (FITs) and mean time between failure (MTBF) for a typical system or in a worst-case scenario.

The graphs are based on a linear method of interpreting the failures observed at burn-in and indicate the long-term reliability of Cypress devices. You can use the graphs to determine MTBF and FITs for any Cypress device in any package after calculating the appropriate ΔT .

The X-axis on the graphs indicates junction temperature. These values are determined by adding the ΔT to ambient temperature, as described earlier. As an example, Figures 2 and 3 note the following critical points for a CY10E301L ECL PLD under three different operating conditions:

- Point A — 10K/10KH typical data sheet conditions: 25°C ambient, nominal V_{EE} and I_{EE} , 50Ω loads, 500 LFPM air flow, $T_J = 64^\circ\text{C}$, FITs = 7, MTBF = 18,000 yrs.
- Point B — 10K/10KH typical operating conditions: 55°C ambient, nominal V_{EE} and I_{EE} , 50Ω loads, 500 LFPM air flow, $T_J = 94^\circ\text{C}$, FITs = 45, MTBF = 2800 yrs.
- Point C — 10K/10KH absolute worst-case conditions: 75°C ambient, 5.46 V max and 170 mA max, 50Ω loads, 500 LFPM air flow, $T_J = 122^\circ\text{C}$, FITs = 225, MTBF = 525 yrs.

The activation energy used for the MTBF and FITs information is 0.7 eV. This is an average number for die-surface-related defects, such as metal and oxide pinholes, etc., but is very conservative for silicon defects or mechanical interfaces to packages. The number is usually 1.0 eV. A small change here results in a significant change in MTBF or FITs. A change to 0.8 eV equates to a 33% reduction in FITs rate or a 50% increase in MTBF.

The Packages of Choice

The PLCC and CLCC are accepted as the packages of choice by many manufacturers of high-speed devices. Motorola Semiconductor uses the PLCC as the only package for the company's very high speed ECL_{INPS} ECL logic family, which stands for "ECL in picoseconds" and is pronounced "eclipse." This family has set-up times and propagation delays in the sub-nanosecond range, with power dissipation of over 1W. Fully compatible with Cypress SRAMs and PLDs, the ECL_{INPS} family includes many 10K, 10KH, and 100K standard logic gates, building blocks, and transceivers.

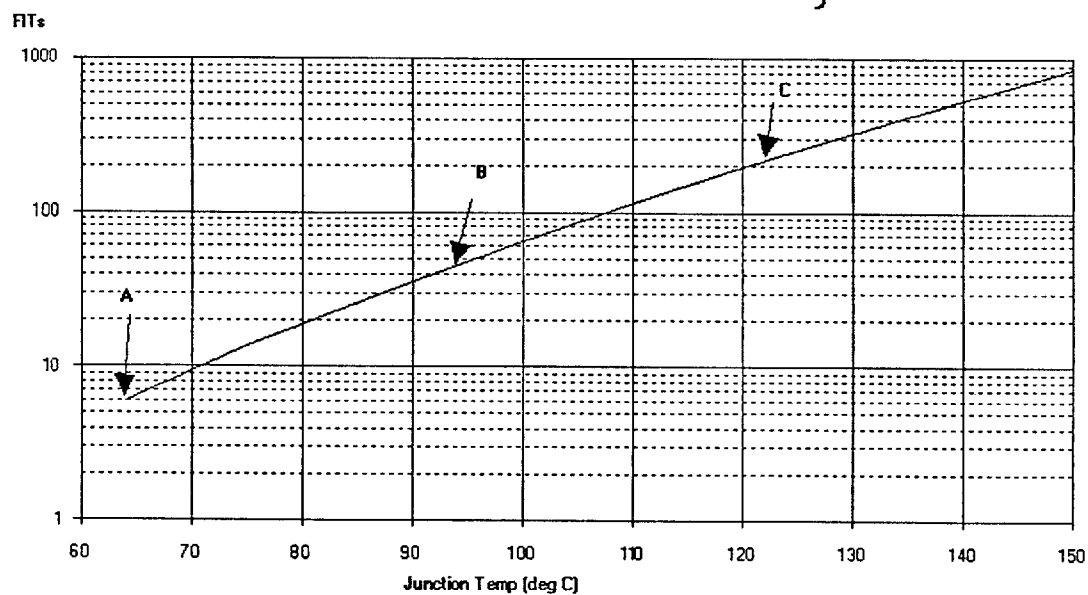
ECL PLD FITs vs. T_j 

Figure 2. Failures in Time vs Junction Temperature

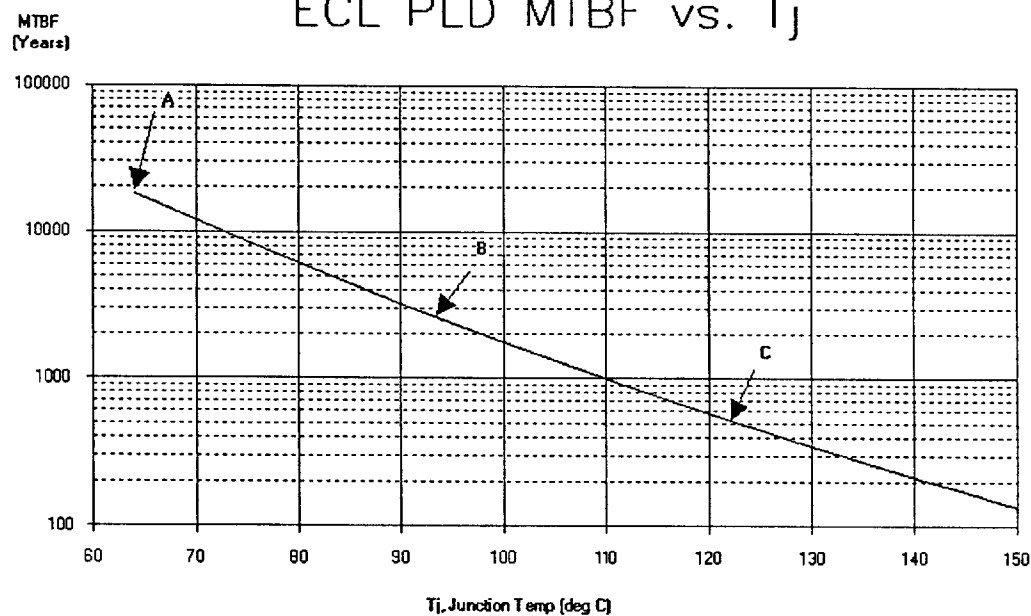
ECL PLD MTBF vs. T_j 

Figure 3. Mean Time Between Failures vs Junction Temp.

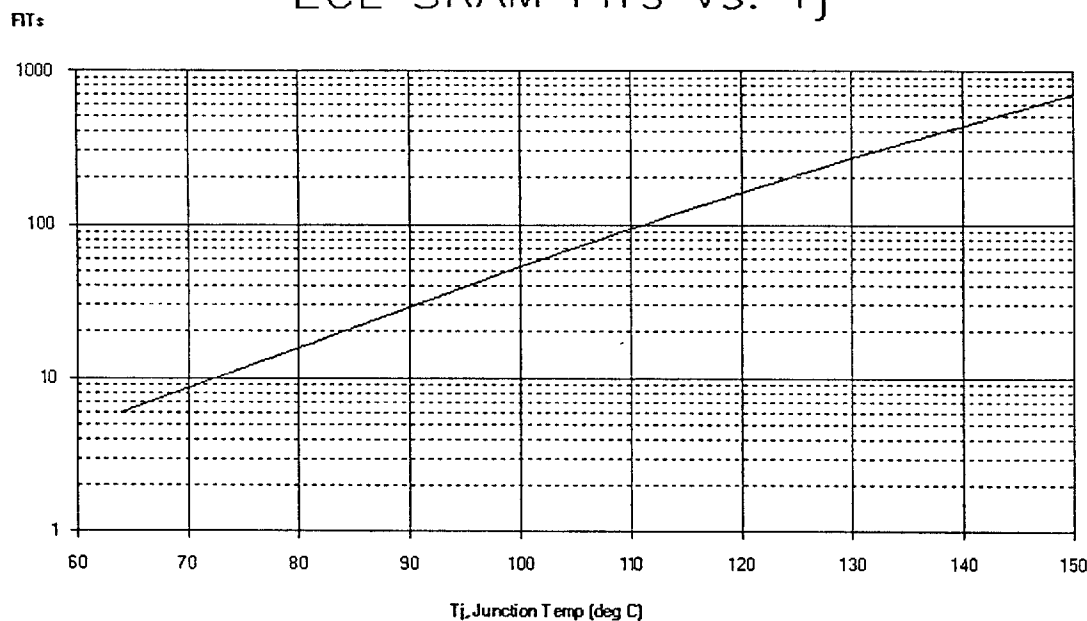
ECL SRAM FITs vs. T_j 

Figure 4. Failures in Time vs Junction Temperature

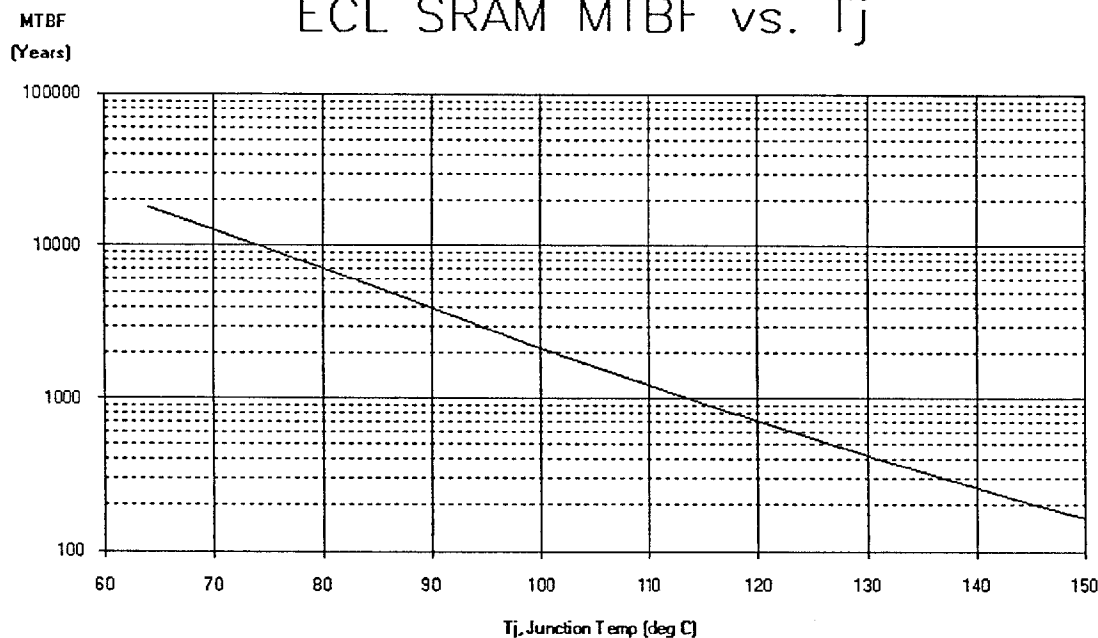
ECL SRAM MTBF vs. T_j 

Figure 5. Mean Time Between Failure vs Junction Temp.