

Micro Commercial Components



Micro Commercial Components 20736 Marilla Street Chatsworth CA 91311 Phone: (818) 701-4933 (818) 701-4939 Fax:

GBJ35005 THRU **GBJ3510**

Features

- Lead Free Finish/RoHS Compliant (NOTE 1)("P" Suffix designates RoHS Compliant. See ordering information)
- Low forward voltage drop, high current capability.
- Epoxy meets UL 94 V-0 flammability rating
- Moisture Sensitivity Level 1
- · Ideal for printed circuit board

Maximum Ratings

- Operating Temperature: -55°C to +150°C
- Storage Temperature: -55°C to +150°C
- UL Recognized File # E165989

MCC	Device	Maximum	Maximum	Maximum	
Catalog	Marking	Reccurrent	RMS	DC	
Number	_	Peak Reverse Voltage		Blocking	
		Voltage	-	Voltage	
GBJ35005	GBJ35005	50V	35V	50V	
GBJ3501	GBJ3501	100V	70V	100V	
GBJ3502	GBJ3502	200V	140V	200V	
GBJ3504	GBJ3504	400V	280V	400V	
GBJ3506	GBJ3506	600V	420V	600V	
GBJ3508	GBJ3508	800V	560V	800V	
GBJ3510	GBJ3510	1000V	700V	1000V	


Electrical Characteristics @ 25°C Unless Atherwis nnifind


electrical cilaracteris	urs @ 79 r	<u>, niiic99 n</u>	illel MI2e Sherillen
Average Forward	I _{F(AV)}	35 A	Tc = 100°C
Current			
Peak Forward Surge	I _{FSM}	350A	8.3ms, half sine
Current			
Maximum			IFM = 17.5 A
Instantaneous	V _F	1.05V	IFM - 17.5 A
Forward Voltage			T _J = 25°C
Maximum DC			
Reverse Current At	I _R	10 µA	T」 = 25°C
Rated DC Blocking		500uA	TJ= 125°C
Voltage			
Typical thermal			
resistance	R _{ojc}	0.6°C/W	
Typical Junction	CJ	85 pF	Measured at
Capacitance			1.0MHz, V _R =4.0V



www.mccsemi.com





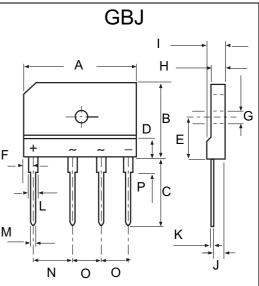

DIMENSIONS

MAX

1.190

.800

.710 .019

.440

.110

.130

.150

.190

.110

.030

.090

.040 .400

.300

170

K

MM

MAX

30.30

20.30

18.00

4.90

11.20

2.70

3.40

3.80

4.80

2.90

0.80

2.40

1.10 10.20

7.70

4 20

NOTE

MIN

29.70

19.70

17.00

4.70

10.80

2.30 3.10

3.40

4.40

2.50

0.60

2.00

0.90 9.80

7.30

3 80

Case Type

INCHES

MIN

1.170

.780

.670 .019

.430

.090

.120

.130

.170

.100

.020 .080

.040

.290

150

DIM

А

В

C D

Е

G

Н


M

0

Т

RATING AND CHARACTERISTIC CURVES GBJ35005 thru GBJ3510



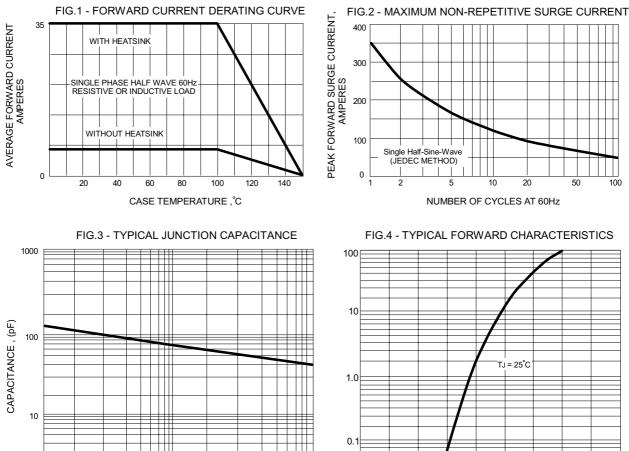

TJ = 25℃, f = 1MHz 4.0 10.0 **REVERSE VOLTAGE**, VOLTS


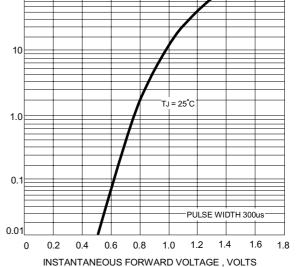


FIG.5 - TYPICAL REVERSE CHARACTERISTICS

100

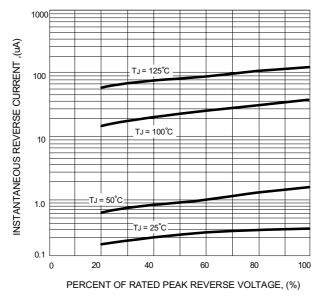

www.mccsemi.com

1.0

1.0



Ordering Information :

Device	Packing	
Part Number-BP	Bulk: 750pcs/Box	

*****IMPORTANT NOTICE*****

Micro Commercial Components Corp. reserves the right to make changes without further notice to any product herein to make corrections, modifications, enhancements, improvements, or other changes. *Micro Commercial Components Corp*. does not assume any liability arising out of the application or use of any product described herein; neither does it convey any license under its patent rights, nor the rights of others. The user of products in such applications shall assume all risks of such use and will agree to hold *Micro Commercial Components Corp*. and all the companies whose products are represented on our website, harmless against all damages.

LIFE SUPPORT

MCC's products are not authorized for use as critical components in life support devices or systems without the express written approval of Micro Commercial Components Corporation.

CUSTOMER AWARENESS

Counterfeiting of semiconductor parts is a growing problem in the industry. Micro Commercial Components (MCC) is taking strong measures to protect ourselves and our customers from the proliferation of counterfeit parts. MCC strongly encourages customers to purchase MCC parts either directly from MCC or from Authorized MCC Distributors who are listed by country on our web page cited below. Products customers buy either from MCC directly or from Authorized MCC Distributors are genuine parts, have full traceability, meet MCC's quality standards for handling and storage. **MCC will not provide any warranty coverage or other assistance for parts bought from Unauthorized Sources.** MCC is committed to combat this global problem and encourage our customers to do their part in stopping this practice by buying direct or from authorized distributors.

www.mccsemi.com