


Aluminum Capacitors Power 105 °C Printed Wiring Style



Component outlines

FEATURES

- Polarized aluminum electrolytic capacitors, non-solid electrolyte
- Large types, minimized dimensions, cylindrical aluminum case, insulated with a blue sleeve
- Provided with keyed polarity
- Very long useful life: 5000 h at 105 °C
- Low ESR, high ripple current capability
- Temperature range up to 105 °C
- High resistance to shock and vibration



RoHS*
COMPLIANT

APPLICATIONS

- Computer, telecommunication and industrial systems
- Smoothing and filtering
- Standard and switched mode power supplies
- Energy storage in pulse systems

MARKING

The capacitors are marked (where possible) with the following information:

- Rated capacitance (in μF)
- Tolerance on rated capacitance, code letter in accordance with IEC 60062 (M for $\pm 20\%$)
- Rated voltage (in V)
- Date code (YYMM)
- Name of manufacturer
- Code for factory of origin
- Polarity of the terminals and '-' sign to indicate the negative terminal, visible from the top and/or side of the capacitor
- Code number
- Climatic category in accordance with IEC 60068


QUICK REFERENCE DATA	
DESCRIPTION	VALUE
Nominal case size ($\varnothing D \times L$ in mm)	25 x 30 to 40 x 100
Rated capacitance range (E6 series), C_R	470 to 150 000 μF 68 to 3300 μF
Tolerance on C_R	$\pm 20\%$
Rated voltage range, U_R	10 to 100 V 200 to 400 V
Category temperature range	- 40 to + 105 °C
Endurance test at 105 °C	2000 h
Useful life at 105 °C	5000 h
Useful life at 40 °C, $1.9 \times I_R$ applied	150 000 h
Shelf life at 0 V, 105 °C	500 h
Based on sectional specification	IEC 60384-4/EN130300
Climatic category IEC 60068	40/105/56

SELECTION CHART FOR C_R , U_R AND RELEVANT NOMINAL CASE SIZES ($\varnothing D \times L$ in mm)						
C_R (μF)	U_R (V)					
	10	16	25	40	63	100
470	-	-	-	-	-	25 x 30
680	-	-	-	-	-	25 x 40
1000	-	-	-	-	25 x 30	30 x 40
1500	-	-	-	-	25 x 40	35 x 40
2200	-	-	-	25 x 30	30 x 40	35 x 50
3300	-	-	-	25 x 40	35 x 40	40 x 40
4700	-	-	25 x 30	30 x 40	35 x 50	40 x 50
6800	-	25 x 30	25 x 40	35 x 40	40 x 50	40 x 70
10 000	25 x 30	25 x 40	30 x 40	35 x 50	40 x 70	-
15 000	25 x 40	30 x 40	35 x 40	40 x 40	40 x 50	-
22 000	30 x 40	35 x 40	35 x 50	40 x 40	40 x 70	-
33 000	35 x 40	35 x 50	40 x 40	40 x 50	-	-
47 000	35 x 50	40 x 40	40 x 50	40 x 70	-	-
68 000	40 x 40	-	-	-	-	-
100 000	40 x 50	40 x 70	40 x 100	-	-	-
150 000	40 x 70	40 x 100	-	-	-	-
150 000	40 x 100	-	-	-	-	-

* Pb containing terminations are not RoHS compliant, exemptions may apply


C _R (μF)	U _R (V)			
	200	250	385	400
68	-	-	25 x 30	25 x 30
100	-	25 x 30	25 x 40	25 x 40
150	25 x 30	25 x 40	30 x 40	30 x 40
220	25 x 40	30 x 40	35 x 40	35 x 40
330	30 x 40	35 x 40	35 x 50	35 x 50
	-	-	40 x 40	40 x 40
470	35 x 40	35 x 50	40 x 50	40 x 50
	-	40 x 40	-	-
680	35 x 50	40 x 50	40 x 70	40 x 70
	40 x 50	-	-	-
1000	40 x 50	40 x 70	40 x 100	40 x 100
1500	40 x 70	40 x 100	-	-
2200	40 x 100	-	-	-

DIMENSIONS in millimeters **AND AVAILABLE FORMS**

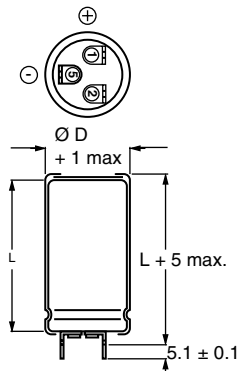


1 = Positive terminal;
5 = negative terminal
Case Ø D = 25 mm

Fig.1 Printed wiring pin version

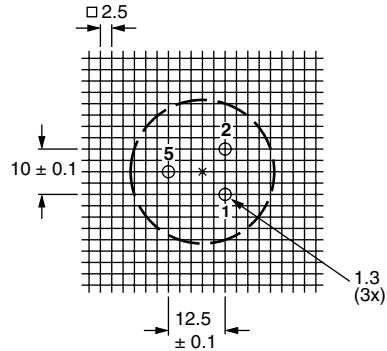


Case Ø D = 25 mm

Fig.2 Mounting hole diagram viewed from the component side

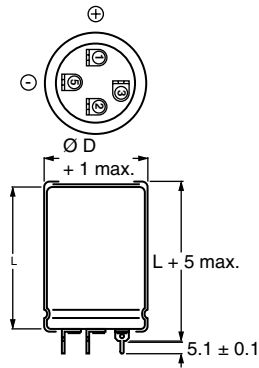

1 = Positive terminal;
5 = negative terminal
Case Ø D = 30 mm and 35 mm

Fig.3 Printed wiring pin version

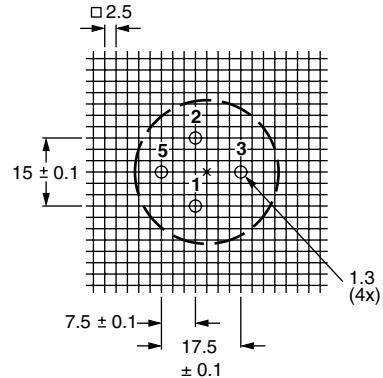


Case Ø D = 30 mm and 35 mm

Fig.4 Mounting hole diagram viewed from the component side


Aluminum Capacitors
Power 105 °C Printed Wiring Style

Vishay Roederstein

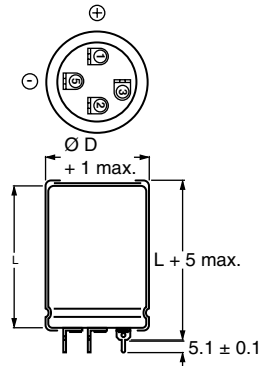


1 = Positive terminal;
5 = negative terminal
Case Ø D = 35 mm

Fig.5 Printed wiring pin version

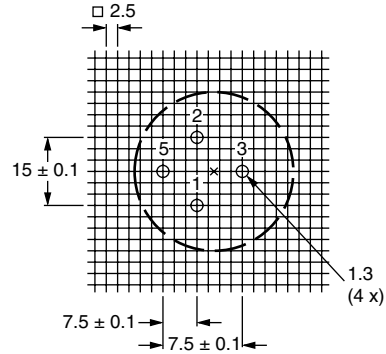


Case Ø D = 35 mm

Fig.6 Mounting hole diagramm viewed from the component side

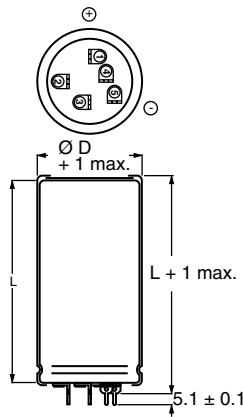

1 = Positive terminal;
5 = Negative terminal
Case Ø D = 40 mm

Fig.7 Printed wiring pin version

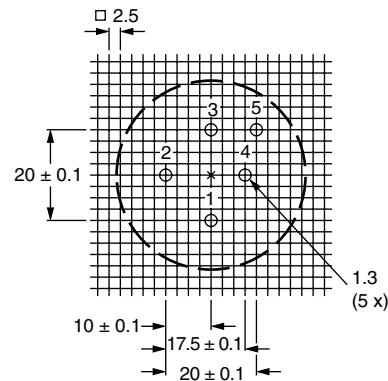

Case Ø D = 40 mm

Fig.8 Mounting hole diagramm viewed from the component side

DIMENSIONS in millimeters, MASS AND PACKAGING QUANTITIES PW versions						
NOMINAL CASE SIZE Ø D x L	Ø D _{max}	L _{max}	MASS (g)	PACKAGING QUANTITIES (units per box)	CARDBOARD BOX DIMENSIONS L x W x H	
25 x 30	26	35	≈ 24	100	290 x 280 x 50	
25 x 40	26	45	≈ 28	100	290 x 280 x 60	
30 x 40	31	45	≈ 38	100	340 x 330 x 60	
35 x 40	36	45	≈ 51	50	390 x 198 x 60	
35 x 50	36	55	≈ 66	50	390 x 198 x 70	
40 x 40	41	45	≈ 78	50	440 x 223 x 60	
40 x 50	41	55	≈ 82	50	440 x 223 x 70	
40 x 70	41	75	≈ 110	25	230 x 230 x 90	
40 x 100	41	105	≈ 176	25	230 x 230 x 120	

MOUNTING

When a number of capacitors are connected in a bank, they must not be closer together than 15 mm, when no derating of ripple current and/or temperature is applied.

Pin numbers 2, 3 and 4 (if present) must be free from the electrical circuit.

ELECTRICAL DATA	
SYMBOL	DESCRIPTION
C_R	rated capacitance at 100 Hz
I_R	rated RMS ripple current at 100 Hz and 105 °C
I_{L1}	max. leakage current after 1 min at U_R
I_{L5}	max. leakage current after 5 min at U_R
ESR	max. equivalent series resistance at 100 Hz
Z	max. impedance at 10 kHz

Note

1. Unless otherwise specified, all electrical values in Tables and 3 apply at $T_{amb} = 20\text{ °C}$, $P = 86\text{ to }106\text{ kPa}$, $RH = 45\text{ to }75\%$.

ORDERING EXAMPLE

10 000 $\mu\text{F}/25\text{ V}$; $\pm 20\%$

Nominal case size: $\varnothing 30 \times 40\text{ mm}$

Catalog number: EYZ00BB510E02W

ELECTRICAL DATA AND ORDERING INFORMATION								
U_R (V)	C_R 100 Hz (μF)	NOMINAL CASE SIZE $\varnothing D \times L$ (mm)	I_R 100 Hz 105 °C (A)	I_{L1} 1 min (mA)	I_{L5} 5 min (mA)	ESR 100 Hz (m Ω)	Z 10 kHz (m Ω)	CATALOG NUMBER
10	10 000	25 × 30	3.17	0.60	0.20	48	37	EYZ00AV510C02W
	15 000	25 × 40	4.21	0.90	0.30	34	27	EYZ00AB515C02W
	22 000	30 × 40	5.05	1.32	0.44	29	23	EYZ00BB522C02W
	33 000	35 × 40	5.63	1.98	0.66	27	22	EYZ00CB533C02W
	47 000	35 × 50	6.19	2.82	0.94	26	21	EYZ00CD547C02W
	47 000	40 × 40	6.19	2.82	0.94	26	21	EYZ00DB547C02W
	68 000	40 × 50	7.64	4.08	1.36	21	18	EYZ00DD568C02W
	100 000	40 × 70	10.0	6.00	2.00	16	15	EYZ00DG610C02W
	150 000	40 × 100	12.9	9.00	3.00	13	12	EYZ00DM615C02W
16	6800	25 × 30	3.11	0.65	0.22	50	37	EYZ00AV468D02W
	10 000	25 × 40	4.09	0.96	0.32	36	27	EYZ00AB510D02W
	15 000	30 × 40	4.97	1.44	0.48	30	23	EYZ00BB515D02W
	22 000	35 × 40	5.53	2.12	0.71	29	22	EYZ00CB522D02W
	33 000	35 × 50	6.08	3.17	1.06	28	21	EYZ00CD533D02W
	33 000	40 × 40	6.08	3.17	1.06	28	21	EYZ00DB533D02W
	47 000	40 × 50	7.46	4.52	1.51	22	18	EYZ00DD547D02W
	68 000	40 × 70	9.70	6.53	2.18	17	15	EYZ00DG568D02W
	100 000	40 × 100	12.90	9.60	3.20	13	12	EYZ00DM610D02W
25	4700	25 × 30	2.94	0.71	0.24	56	37	EYZ00AV447E02W
	6800	25 × 40	3.93	1.02	0.34	39	27	EYZ00AB468E02W
	10 000	30 × 40	4.81	1.50	0.50	32	23	EYZ00BB510E02W
	15 000	35 × 40	5.43	2.25	0.75	30	22	EYZ00CB515E02W
	22 000	35 × 50	5.98	3.30	1.10	29	21	EYZ00CD522E02W
	22 000	40 × 40	5.98	3.30	1.10	29	21	EYZ00DB522E02W
	33 000	40 × 50	7.30	4.95	1.65	23	18	EYZ00DD533E02W
	47 000	40 × 70	9.43	7.05	2.35	18	15	EYZ00DG547E02W
	68 000	40 × 100	12.44	10.20	3.40	14	12	EYZ00DM568E02W
40	2200	25 × 30	2.36	0.53	0.18	87	54	EYZ00AV422G02W
	3300	25 × 40	3.17	0.79	0.27	60	38	EYZ00AB423G02W
	4700	30 × 40	3.93	1.13	0.38	48	33	EYZ00BB447G02W
	6800	35 × 40	4.59	1.63	0.55	42	31	EYZ00CB468G02W
	10 000	35 × 50	5.03	2.40	0.80	41	29	EYZ00CD510G02W
	10 000	40 × 40	5.03	2.40	0.80	41	29	EYZ00DB510G02W
	15 000	40 × 50	6.09	3.60	1.20	33	24	EYZ00DD515G02W
	22 000	40 × 70	8.34	5.28	1.76	23	18	EYZ00DG522G02W
	33 000	40 × 100	10.97	7.92	2.64	18	15	EYZ00DM533G02W
63	1000	25 × 30	1.55	0.38	0.13	202	155	EYZ00AV410J02W
	1500	25 × 40	2.10	0.57	0.19	137	109	EYZ00AB415J02W
	2200	30 × 40	2.72	0.83	0.28	100	79	EYZ00BB422J02W
	3300	35 × 40	3.44	1.25	0.42	75	61	EYZ00CB433J02W
	4700	35 × 50	4.09	1.78	0.60	62	53	EYZ00CD447J02W
	4700	40 × 40	4.09	1.78	0.60	62	53	EYZ00DB447J02W
	6800	40 × 50	5.10	2.57	0.86	47	40	EYZ00DD468J02W
	10 000	40 × 70	6.86	3.78	1.26	34	29	EYZ00DG510J02W
	15 000	40 × 100	9.31	5.67	1.89	25	21	EYZ00DM515J02W



Not for new design

EYZ

Aluminum Capacitors
Power 105 °C Printed Wiring Style


Vishay Roederstein

ELECTRICAL DATA AND ORDERING INFORMATION								
U _R (V)	C _R 100 Hz (µF)	NOMINAL CASE SIZE Ø D × L (mm)	I _R 100 Hz 105 °C (A)	I _{L1} 1 min (mA)	I _{L5} 5 min (mA)	ESR 100 Hz (mΩ)	Z 10 kHz (mΩ)	CATALOG NUMBER
100	470	25 × 30	1.42	0.28	0.10	240	155	EYZ00AV347L02W
	680	25 × 40	1.90	0.41	0.14	167	109	EYZ00AB368L02W
	1000	30 × 40	2.48	0.60	0.20	120	79	EYZ00BB410L02W
	1500	35 × 40	3.17	0.90	0.30	88	61	EYZ00CB415L02W
	2200	35 × 50	3.79	1.32	0.44	72	53	EYZ00CD422L02W
	2200	40 × 40	3.79	1.32	0.44	72	53	EYZ00DB422L02W
	3300	40 × 50	4.81	1.98	0.66	53	40	EYZ00DD433L02W
	4700	40 × 70	6.49	2.82	0.94	38	29	EYZ00DG447L02W
6800	40 × 100	8.80	4.08	1.36	28	21	EYZ00DM468L02W	
200	150	25 × 30	0.72	0.18	0.06	950	710	EYZ00AV315S02W
	220	25 × 40	0.96	0.26	0.09	650	485	EYZ00AB322S02W
	330	30 × 40	1.29	0.40	0.14	442	330	EYZ00BB333S02W
	470	35 × 40	1.66	0.57	0.19	321	240	EYZ00CB347S02W
	680	35 × 50	2.09	0.82	0.28	237	185	EYZ00CD368S02W
	680	40 × 40	2.09	0.82	0.28	237	185	EYZ00DB368S02W
	1000	40 × 50	2.71	1.20	0.40	167	133	EYZ00DD410S02W
	1500	40 × 70	3.75	1.80	0.60	114	90	EYZ00DG415S02W
2200	40 × 100	5.24	2.64	0.88	79	62	EYZ00DM422S02W	
250	100	25 × 30	0.67	0.15	0.05	1060	710	EYZ00AV310N02W
	150	25 × 40	0.92	0.22	0.08	710	485	EYZ00AB315N02W
	220	30 × 40	1.28	0.33	0.11	492	330	EYZ00BB322N02W
	330	35 × 40	1.65	0.49	0.17	325	240	EYZ00CB333N02W
	470	35 × 50	2.01	0.70	0.24	256	185	EYZ00CD347N02W
	470	40 × 40	2.01	0.70	0.24	256	185	EYZ00DB347N02W
	680	40 × 50	2.59	1.02	0.34	182	133	EYZ00DD368N02W
	1000	40 × 70	3.58	1.50	0.50	125	90	EYZ00DG410N02W
1500	40 × 100	5.05	2.25	0.75	85	62	EYZ00DM415N02W	
385	68	25 × 30	0.61	0.16	0.06	1650	1260	EYZ00AV268R02W
	100	25 × 40	0.82	0.23	0.08	1120	855	EYZ00AB310R02W
	150	30 × 40	1.10	0.35	0.12	755	580	EYZ00BB315R02W
	220	35 × 40	1.44	0.51	0.17	525	405	EYZ00CB322R02W
	330	35 × 50	1.84	0.77	0.26	360	280	EYZ00CD333R02W
	330	40 × 40	1.84	0.77	0.26	360	280	EYZ00DB333R02W
	470	40 × 50	2.37	1.09	0.36	260	205	EYZ00DD347R02W
	680	40 × 70	3.24	1.58	0.53	180	140	EYZ00DG368R02W
1000	40 × 100	4.54	2.31	0.78	125	100	EYZ00DM410R02W	
400	68	25 × 30	0.39	0.16	0.06	3200	2660	EYZ00AV268X02W
	100	25 × 40	0.53	0.24	0.08	2180	1810	EYZ00AB310X02W
	150	30 × 40	0.72	0.36	0.12	1460	1210	EYZ00BB315X02W
	220	35 × 40	0.94	0.52	0.17	1010	830	EYZ00CB322X02W
	330	35 × 50	1.24	0.79	0.26	680	570	EYZ00CD333X02W
	330	40 × 40	1.24	0.79	0.26	680	570	EYZ00DB333X02W
	470	40 × 50	1.59	1.12	0.37	485	407	EYZ00DD347X02W
	680	40 × 70	2.18	1.63	0.54	336	282	EYZ00DG368X02W
1000	40 × 100	3.07	2.40	0.80	230	193	EYZ00DM410X02W	

ADDITIONAL ELECTRICAL DATA		
PARAMETER	CONDITIONS	VALUE
Voltage		
Surge voltage	≤ 200 V versions	U _s = 1.15 × U _R
	≥ 385 V versions	U _s = 1.1 × U _R
Reverse voltage		U _{rev} ≤ 1 V
Current		
Leakage current	after 1 min at U _R	I _{L1} ≤ 0.006 C _R × U _R + 4 µA
	after 5 min at U _R	I _{L5} ≤ 0.002 C _R × U _R + 4 µA
Inductance		
Equivalent series inductance (ESL)	case Ø D = 25 mm	max. 25 nH
	case Ø D = 30 and 35 mm	max. 30 nH
	case Ø D = 40 mm	max. 35 nH

RIPPLE CURRENT AND USEFUL LIFE

MGA454

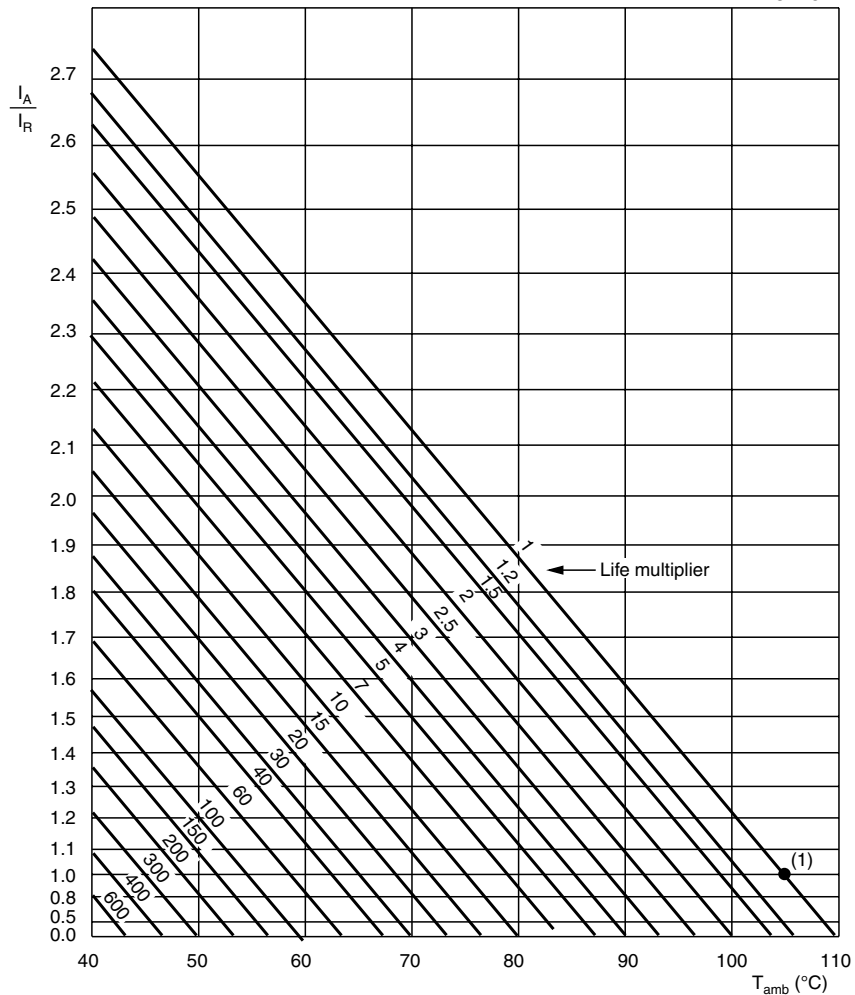

I_A = Actual ripple current at 100 Hz
 I_R = Rated ripple current at 100 Hz and 105 °C
 (1) Useful life at 105 °C and I_R applied: 5000 h

Multiplier of useful life as a function of ambient temperature and ripple current load

MULTIPLIER OF RIPPLE CURRENT (I_R) AS A FUNCTION OF FREQUENCY			
FREQUENCY (Hz)	I_R MULTIPLIER		
	$U_R = 10 \text{ to } 25 \text{ V}$	$U_R = 40 \text{ to } 100 \text{ V}$	$U_R = 200 \text{ to } 400 \text{ V}$
50	0.93	0.91	0.86
100	1.00	1.00	1.00
200	1.04	1.05	1.13
400	1.07	1.09	1.21
1000	1.11	1.13	1.29
2000	1.13	1.15	1.32
4000	1.15	1.18	1.35
$\geq 10\ 000$	1.18	1.22	1.40

Aluminum Capacitors
Power 105 °C Printed Wiring Style

Vishay Roederstein

TEST PROCEDURES AND REQUIREMENT			
TEST		PROCEDURE (quick reference)	REQUIREMENTS
NAME OF TEST	REFERENCE		
Endurance	IEC 60384-4/ EN130300 subclause 4.13	$T_{amb} = 105\text{ °C}$; U_R applied; 2000 h	$U_R \leq 100\text{ V}$; $\Delta C/C: \pm 15\%$ $U_R > 100\text{ V}$; $\Delta C/C: \pm 10\%$ $ESR \leq 1.3 \times \text{spec. limit}$ $Z \leq 2 \times \text{spec. limit}$ $I_{L5} \leq \text{spec. limit}$
Useful life	CECC 30301 subclause 1.8.1	$T_{amb} = 105\text{ °C}$; U_R and I_R applied; 5000 h	$U_R \leq 100\text{ V}$; $\Delta C/C: \pm 45\%$ $U_R > 100\text{ V}$; $\Delta C/C: \pm 30\%$ $ESR \leq 3 \times \text{spec. limit}$ $Z \leq 3 \times \text{spec. limit}$ $I_{L5} \leq \text{spec. limit}$ no short or open circuit, no visible damage total failure percentage: $U_R \leq 100\text{ V}: \leq 1\%$; $U_R > 100\text{ V}: \leq 3\%$
Shelf life (storage at high temperature)	IEC 60384-4/ EN130300 subclause 4.17	$T_{amb} = 105\text{ °C}$; no voltage applied; 500 h after test: U_R to be applied for 30 min, 24 to 48 h before measurement	$\Delta C/C: \pm 10\%$ $ESR \leq 1.2 \times \text{spec. limit}$ $I_{L5} \leq 2 \times \text{spec. limit}$



Notice

Specifications of the products displayed herein are subject to change without notice. Vishay Intertechnology, Inc., or anyone on its behalf, assumes no responsibility or liability for any errors or inaccuracies.

Information contained herein is intended to provide a product description only. No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document. Except as provided in Vishay's terms and conditions of sale for such products, Vishay assumes no liability whatsoever, and disclaims any express or implied warranty, relating to sale and/or use of Vishay products including liability or warranties relating to fitness for a particular purpose, merchantability, or infringement of any patent, copyright, or other intellectual property right.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications. Customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify Vishay for any damages resulting from such improper use or sale.