

# Surface Mount Aluminum Electrolytic Capacitors NACY Series

## FEATURES

- CYLINDRICAL V-CHIP CONSTRUCTION FOR SURFACE MOUNTING
- LOW IMPEDANCE AT 100KHz (Up to 20% lower than NACZ)
- WIDE TEMPERATURE RANGE (-55 +105°C)
- DESIGNED FOR AUTOMATIC MOUNTING AND REFLOW SOLDERING

**RoHS  
Compliant**

includes all homogeneous materials

\*See Part Number System for Details



## CHARACTERISTICS

Rated Capacitance Range		4.7 ~ 6800 $\mu$ F										
Operating Temperature Range		- 55°C + 105°C										
Capacitance Tolerance		$\pm$ 20% (120Hz/+20°C)										
Max. Leakage Current after 2 minutes at 20°C		0.01CV or 3 $\mu$ A										
Max. Tan $\delta$ at 120Hz & 20°C	W.V.(Vdc)	6.3	10	16	25	35	50	63	80	100		
	S.V.(Vdc)	8	13	20	32	44	63	80	100	125		
	Tan $\delta$	$\phi$ 4 to $\phi$ 6.3	0.24	0.20	0.16	0.14	0.12	0.12	0.10	0.08	0.07	
		$\phi$ 8 ~ $\phi$ 16	C $\leq$ 1500 $\mu$ F	0.28	0.24	0.20	0.16	0.14	0.14	0.12	0.10	0.08
			C=2200 $\mu$ F	-	0.26	-	0.18	-	-	-	-	-
			C=3300 $\mu$ F	0.32	-	0.24	-	-	-	-	-	-
C=4700 $\mu$ F	-		0.30	-	-	-	-	-	-	-		
C=6800 $\mu$ F	0.36	-	-	-	-	-	-	-	-			
Low Temperature Stability (Impedance Ratio at 120 Hz)	Z -40°C/Z +20°C	3	2	2	2	2	2	2	2	2		
	Z -55°C/Z +20°C	5	4	4	3	3	3	3	3	3		
Load Life Test AT 105°C 4 ~ 6.3mm Dia 1,000 Hours 8 ~ 12.5mm Dia 2,000 Hours	Capacitance Change	Within $\pm$ 25% of initial measured value										
	Tan $\delta$	Less than 200% of the specified value										
	Leakage Current	Less than the specified maximum value										

## STANDARD PRODUCT AND CASE SIZE D $\phi$ xL (mm)

Cap ( $\mu$ F)	Code	Working Voltage (Vdc)								
		6.3	10	16	25	35	50	63	80	100
4.7	4R7	-	-	-	-	4x6.3	4x6.3	5x6.3	6.3x6.3	-
10	100	-	-	-	4x6.3	5x6.3	6.3x6.3	6.3x6.3	6.3x8	-
15	150	-	-	4x6.3	5x6.3	5x6.3	-	-	-	-
22	220	-	4x6.3	5x6.3	5x6.3	5x6.3	6.3x6.3	6.3x8	8x10.5	8x10.5
27	270	4x6.3	-	-	-	-	-	-	-	-
33	330	-	5x6.3	-	6.3x6.3	6.3x6.3	6.3x8	8x10.5	8x10.5	10x10.5
47	470	5x6.3	-	6.3x6.3	6.3x6.3	6.3x6.3	6.3x8	8x10.5	10x10.5	12.5x14
56	560	5x6.3	-	-	6.3x6.3	-	-	-	-	-
68	680	-	6.3x6.3	6.3x6.3	6.3x6.3	6.3x8	-	-	-	-
100	101	6.3x6.3	-	6.3x6.3	6.3x8	8x10.5	8x10.5	10x10.5	12.5x14	16x17
150	151	6.3x6.3	6.3x6.3	6.3x8	8x10.5	8x10.5	-	-	12.5x14	16x17
220	221	6.3x6.3	6.3x8	6.3x8	8x10.5	8x10.5	10x10.5	12.5x14	-	-
330	331	6.3x8	8x10.5	8x10.5	8x10.5	10x10.5	12.5x14	-	16x17	-
470	471	8x10.5	8x10.5	8x10.5	10x10.5	12.5x14	-	16x17	-	-
680	681	8x10.5	-	10x10.5	-	12.5x14	-	-	-	-
1000	102	8x10.5	10x10.5	-	12.5x14	-	16x17	-	-	-
1500	152	10x10.5	-	12.5x14	-	16x17	-	-	-	-
2200	222	-	12.5x14	-	16x17	-	-	-	-	-
3300	332	12.5x14	-	16x17	-	-	-	-	-	-
4700	472	-	16x17	-	-	-	-	-	-	-
6800	682	16x17	-	-	-	-	-	-	-	-

Denotes New Values

### PRECAUTIONS

Please review the notes on correct use, safety and precautions found on pages T10 & T11 of NIC's Electrolytic Capacitor catalog.  
Also found at [www.niccomp.com/precautions](http://www.niccomp.com/precautions)  
If in doubt or uncertainty, please review your specific application - process details with NIC's technical support personnel: [tpmg@niccomp.com](mailto:tpmg@niccomp.com)



# Surface Mount Aluminum Electrolytic Capacitors NACY Series

## STANDARD VALUES, CASE SIZES AND SPECIFICATIONS

NIC Part Number	Cap. (μF)	W.V. (Vdc)	Dissipation Factor (Tan δ)	Max. Ripple Current (mA) +105°C/100kHz	Max. Z (Ω) +20°C/100kHz	Load Life Hours @ +105°C	
NACY270M6.3V4X6.3TR13F	27	6.3	0.24	90	1.45	1,000	
NACY470M6.3V5X6.3TR13F	47		0.24	170	0.7	1,000	
NACY560M6.3V5X6.3TR13F	56		0.24	170	0.7	1,000	
NACY101M6.3V6.3X6.3TR13F	100		0.24	250	0.39	1,000	
NACY151M6.3V6.3X6.3TR13F	150		0.24	250	0.39	1,000	
NACY221M6.3V6.3X6.3TR13F	220		0.24	250	0.39	1,000	
NACY331M6.3V6.3X8TR13F	330		0.24	300	0.3	1,000	
NACY471M6.3V8X10.5TR13F	470		0.28	600	0.15	2,000	
NACY681M6.3V8X10.5TR13F	680		0.28	600	0.15	2,000	
NACY102M6.3V8X10.5TR13F	1000		0.28	600	0.15	2,000	
NACY152M6.3V10X10.5TR13F	1500		0.28	850	0.08	2,000	
NACY332M6.3V12.5X14TR13F	3300		0.32	1150	0.058	2,000	
NACY682M6.3V16X17TR13F	6800		0.36	1800	0.035	2,000	
NACY220M10V4X6.3TR13F	22		10	0.20	90	1.45	1,000
NACY330M10V5X6.3TR13F	33	0.20		170	0.7	1,000	
NACY680M10V6.3X6.3TR13F	68	0.20		250	0.39	1,000	
NACY151M10V6.3X6.3TR13F	150	0.20		250	0.39	1,000	
NACY221M10V6.3X8TR13F	220	0.20		300	0.3	1,000	
NACY331M10V8X10.5TR13F	330	0.24		600	0.15	2,000	
NACY471M10V8X10.5TR13F	470	0.24		600	0.15	2,000	
NACY102M10V10X10.5TR13F	1000	0.24		850	0.08	2,000	
NACY222M10V12.5X14TR13F	2200	0.26		1150	0.058	2,000	
NACY472M10V16X17TR13F	4700	0.30		1800	0.035	2,000	
NACY150M16V4X6.3TR13F	15	16		0.16	90	1.45	1,000
NACY220M16V5X6.3TR13F	22		0.16	170	0.7	1,000	
NACY470M16V6.3X6.3TR13F	47		0.16	250	0.39	1,000	
NACY680M16V6.3X6.3TR13F	68		0.16	250	0.39	1,000	
NACY101M16V6.3X6.3TR13F	100		0.16	250	0.39	1,000	
NACY151M16V6.3X8TR13F	150		0.16	300	0.3	1,000	
NACY221M16V6.3X8TR13F	220		0.16	300	0.3	1,000	
NACY331M16V8X10.5TR13F	330		0.20	600	0.15	2,000	
NACY471M16V8X10.5TR13F	470		0.20	600	0.15	2,000	
NACY681M16V10X10.5TR13F	680		0.20	850	0.08	2,000	
NACY152M16V12.5X14TR13F	1500		0.20	1150	0.058	2,000	
NACY332M16V16X17TR13F	3300		0.24	1800	0.035	2,000	
NACY100M25V4X6.3TR13F	10		25	0.14	90	1.45	1,000
NACY150M25V5X6.3TR13F	15			0.14	170	0.7	1,000
NACY220M25V5X6.3TR13F	22	0.14		170	0.7	1,000	
NACY330M25V6.3X6.3TR13F	33	0.14		250	0.39	1,000	
NACY470M25V6.3X6.3TR13F	47	0.14		250	0.39	1,000	
NACY560M25V6.3X6.3TR13F	56	0.14		250	0.39	1,000	
NACY680M25V6.3X6.3TR13F	68	0.14		250	0.39	1,000	
NACY101M25V6.3X8TR13F	100	0.14		300	0.3	1,000	
NACY151M25V8X10.5TR13F	150	0.16		600	0.15	2,000	
NACY221M25V8X10.5TR13F	220	0.16		600	0.15	2,000	
NACY331M25V8X10.5TR13F	330	0.16		600	0.15	2,000	
NACY471M25V10X10.5TR13F	470	0.16		850	0.08	2,000	
NACY102M25V12.5X14TR13F	1000	0.16		1150	0.058	2,000	
NACY222M25V16X17TR13F	2200	0.18		1800	0.035	2,000	
NACY4R7M35V4X6.3TR13F	4.7	35	0.12	90	1.45	1,000	
NACY100M35V5X6.3TR13F	10		0.12	170	0.7	1,000	
NACY150M35V5X6.3TR13F	15		0.12	170	0.7	1,000	
NACY220M35V5X6.3TR13F	22		0.12	170	0.7	1,000	
NACY330M35V6.3X6.3TR13F	33		0.12	250	0.39	1,000	
NACY470M35V6.3X6.3TR13F	47		0.12	250	0.39	1,000	
NACY680M35V6.3X8TR13F	68		0.12	300	0.30	1,000	
NACY101M35V8X10.5TR13F	100		0.14	600	0.15	2,000	
NACY151M35V8X10.5TR13F	150		0.14	600	0.15	2,000	
NACY221M35V8X10.5TR13F	220		0.14	600	0.15	2,000	

For Automotive Equipment, see part number system



# Surface Mount Aluminum Electrolytic Capacitors NACY Series

## STANDARD VALUES, CASE SIZES AND SPECIFICATIONS

NIC Part Number	Cap. (μF)	W.V. (Vdc)	Dissipation Factor (Tan δ)	Max. Ripple Current (mA) +105°C/100kHz	Max. Z (Ω) +20°C/100kHz	Load Life Hours @ +105°C
NACY331M35V10X10.5TR13F	330	35	0.14	850	0.08	2,000
NACY471M35V12.5X14TR13F	470		0.14	1150	0.058	2,000
NACY681M35V12.5X14TR13F	680		0.14	1150	0.058	2,000
NACY152M35V16X17TR13F	1500		0.14	1800	0.035	2,000
NACY4R7M50V4X6.3TR13F	4.7	50	0.12	64	2.55	1,000
NACY100M50V6.3X6.3TR13F	10		0.12	215	0.52	1,000
NACY220M50V6.3X6.3TR13F	22		0.12	215	0.52	1,000
NACY330M50V6.3X8TR13F	33		0.12	243	0.44	1,000
NACY470M50V6.3X8TR13F	47		0.12	243	0.44	1,000
NACY101M50V8X10.5TR13F	100		0.14	400	0.22	2,000
NACY221M50V10X10.5TR13F	220		0.14	585	0.13	2,000
NACY331M50V12.5X14TR13F	330		0.14	800	0.10	2,000
NACY102M50V16X17TR13F	1000		0.14	1610	0.065	2,000
NACY4R7M63V5X6.3TR13F	4.7		63	0.10	55	2.00
NACY100M63V6.3X6.3TR13F	10	0.10		90	1.00	1,000
NACY220M63V6.3X8TR13F	22	0.10		135	0.80	1,000
NACY330M63V8X10.5TR13F	33	0.12		280	0.35	2,000
NACY470M63V8X10.5TR13F	47	0.12		280	0.35	2,000
NACY101M63V10X10.5TR13F	100	0.12		480	0.20	2,000
NACY221M63V12.5X14TR13F	220	0.12		800	0.14	2,000
NACY471M63V16X17TR13F	470	0.12		1410	0.065	2,000
NACY4R7M80V6.3X6.3TR13F	4.7	80	0.08	45	2.40	1,000
NACY100M80V6.3X8TR13F	10		0.08	65	2.00	1,000
NACY220M80V8X10.5TR13F	22		0.10	140	0.90	2,000
NACY330M80V8X10.5TR13F	33		0.10	140	0.90	2,000
NACY470M80V10X10.5TR13F	47		0.10	220	0.50	2,000
NACY101M80V12.5X14TR13F	100		0.10	500	0.24	2,000
NACY151M80V12.5X14TR13F	150		0.10	500	0.24	2,000
NACY331M80V16X17TR13F	330		0.10	800	0.14	2,000
NACY220M100V8X10.5TR13F	22	100	0.08	140	0.90	2,000
NACY330M100V10X10.5TR13F	33		0.08	220	0.50	2,000
NACY470M100V12.5X14TR13F	47		0.08	500	0.24	2,000
NACY101M100V16X17TR13F	100		0.08	800	0.14	2,000
NACY151M100V16X17TR13F	150		0.08	800	0.14	2,000

For Automotive Equipment, see part number system

### RIPPLE CURRENT


### FREQUENCY CORRECTION FACTOR

Frequency	≤ 120Hz	≤ 1KHz	≤ 10KHz	≤ 100KHz
Correction Factor	0.75	0.85	0.95	1.00



# Surface Mount Aluminum Electrolytic Capacitors NACY Series

## PART NUMBER SYSTEM

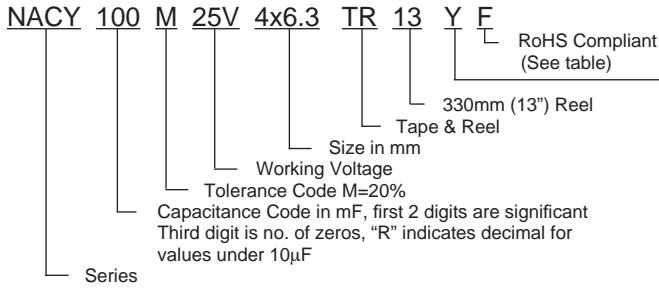


Optional: Suitable for automotive equipment, sourced to special production and inspection at TS-16949 certified production site

Case Diameter	Termination Material
4 ~ 8mm $\phi$	97% Sn, 3% Bi
10 ~ 12.5mm	99.3% Sn, 0.7% Bi
16mm	100% Sn


## DIMENSIONS (mm)

Case Size	D $\phi$ $\pm$ 0.5	L max.	A $\pm$ 0.2	B $\pm$ 0.2	I $\pm$ 0.2	W	P $\pm$ 0.2
4 x 6.3	4.0	6.3	4.3	4.3	1.8	0.5 ~ 0.8	1.0
5 x 6.3	5.0	6.3	5.3	5.3	2.2	0.5 ~ 0.8	1.5
6.3 x 6.3	6.3	6.3	6.6	6.6	2.5	0.5 ~ 0.8	2.2
6.3 x 8	6.3	8.0	6.6	6.6	2.5	0.5 ~ 0.8	2.2
8 X 10.5	8.0	10.5	8.3	8.3	2.9	0.7 ~ 1.0	3.2
10 x 10.5	10.0	10.5	10.3	10.3	3.2	0.7 ~ 1.4	4.6
12.5 x 14	12.5	14.0	12.8	12.8	4.5	0.6 ~ 1.4	4.6
16x17	16.0	17	16.3	16.3	5.0	1.8 ~ 2.1	7.0

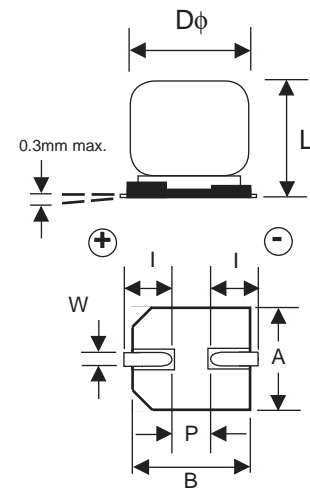

## RECOMMENDED LAND PATTERN DIMENSIONS (mm)

Case Size	a	b	c
4 $\phi$	1.0	2.6	1.8
5 $\phi$	1.4	3.0	1.8
6.3 $\phi$	2.1	3.5	1.8
8 $\phi$	2.8	4.1	2.1
10 $\phi$	4.3	4.4	2.5



Review & Compare Reflow Soldering Heat Limits  
V-chip SMT Aluminum Electrolytic Capacitors  
[www.niccomp.com/RSL](http://www.niccomp.com/RSL)

