


X7R Dielectric

General Specifications

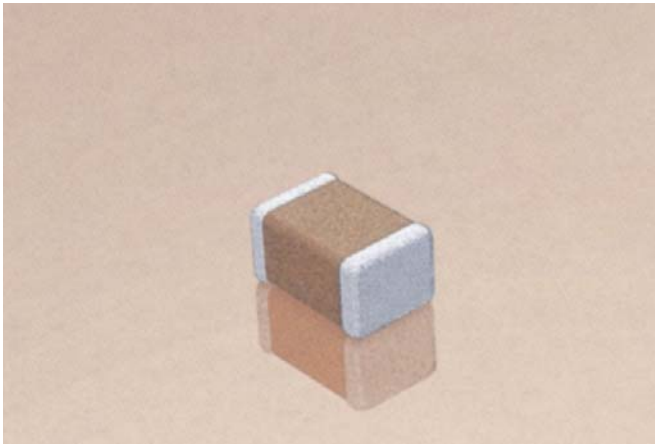

X7R formulations are called "temperature stable" ceramics and fall into EIA Class II materials. X7R is the most popular of these intermediate dielectric constant materials. Its temperature variation of capacitance is within $\pm 15\%$ from -55°C to $+125^{\circ}\text{C}$. This capacitance change is non-linear.







Capacitance for X7R varies under the influence of electrical operating conditions such as voltage and frequency.

X7R dielectric chip usage covers the broad spectrum of industrial applications where known changes in capacitance due to applied voltages are acceptable.

PART NUMBER (see page 2 for complete part number explanation)

| | | | | | | | | |
|--------------------------|--|------------------------------|---|---|---|---|---|---|
| 0805 | 5 | C | 103 | M | A | T | 2 | A |
| Size (L" x W") | Voltage 4V = 4 6.3V = 6 10V = Z 16V = Y 25V = 3 50V = 5 100V = 1 200V = 2 500V = 7 | Dielectric X7R = C | Capacitance Code (In pF) 2 Sig. Digits + Number of Zeros | Capacitance Tolerance J = $\pm 5\%$ * K = $\pm 10\%$ M = $\pm 20\%$ * $\leq 1\mu\text{F}$ only | Failure Rate A = Not Applicable | Terminations T = Plated Ni and Sn 7 = Gold Plated* Z = FLEXITERM®** | Packaging 2 = 7" Reel 4 = 13" Reel 7 = Bulk Cass. 9 = Bulk | Special Code A = Std. Product |
| | | | | | | *Optional termination **See FLEXITERM® X7R section | Contact Factory For Multiples | |

NOTE: Contact factory for availability of Termination and Tolerance Options for Specific Part Numbers.
Contact factory for non-specified capacitance values.

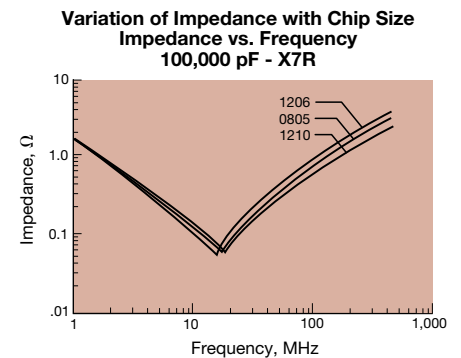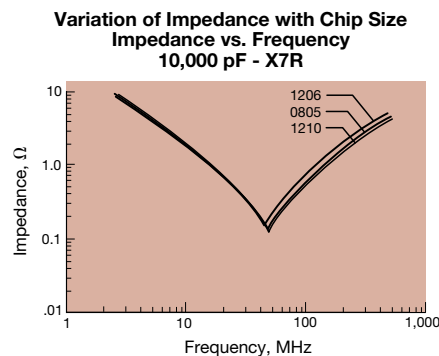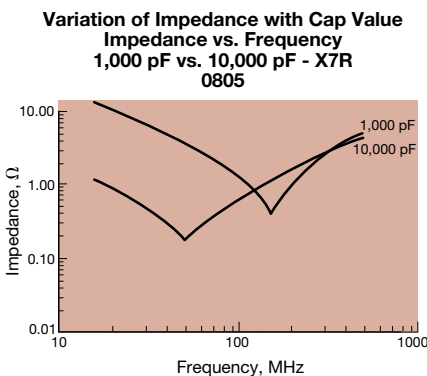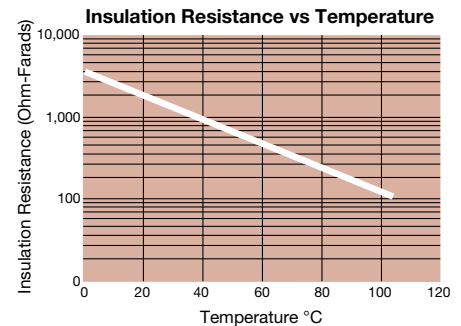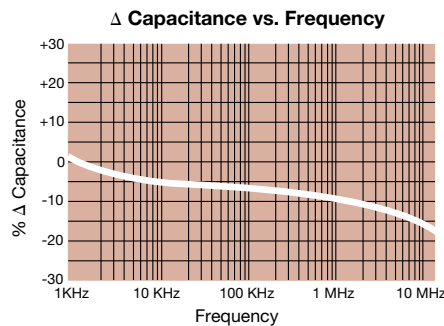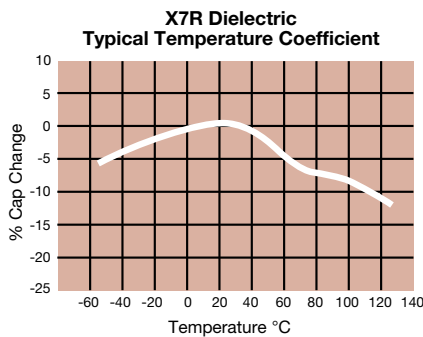

Specifications and Test Methods

| Parameter/Test | | X7R Specification Limits | Measuring Conditions | |
|---------------------------------------|-----------------------|--|---|--------------------|
| Operating Temperature Range | | -55°C to +125°C | Temperature Cycle Chamber | |
| Capacitance | | Within specified tolerance | Freq.: 1.0 kHz \pm 10% Voltage: 1.0Vrms \pm .2V For Cap > 10 μ F, 0.5Vrms @ 120Hz | |
| Dissipation Factor | | \leq 2.5% for \geq 50V DC rating \leq 3.0% for 25V DC rating \leq 3.5% for 16V DC rating \leq 5.0% for \leq 10V DC rating | | |
| Insulation Resistance | | 100,000M Ω or 1000M Ω - μ F, whichever is less | Charge device with rated voltage for 120 \pm 5 secs @ room temp/humidity | |
| Dielectric Strength | | No breakdown or visual defects | Charge device with 300% of rated voltage for 1-5 seconds, w/charge and discharge current limited to 50 mA (max) Note: Charge device with 150% of rated voltage for 500V devices. | |
| Resistance to Flexure Stresses | Appearance | No defects | Deflection: 2mm Test Time: 30 seconds | |
| | Capacitance Variation | \leq \pm 12% | | |
| | Dissipation Factor | Meets Initial Values (As Above) | | |
| | Insulation Resistance | \geq Initial Value x 0.3 | | |
| Solderability | | \geq 95% of each terminal should be covered with fresh solder | Dip device in eutectic solder at 230 \pm 5°C for 5.0 \pm 0.5 seconds | |
| Resistance to Solder Heat | Appearance | No defects, <25% leaching of either end terminal | Dip device in eutectic solder at 260°C for 60 seconds. Store at room temperature for 24 \pm 2 hours before measuring electrical properties. | |
| | Capacitance Variation | \leq \pm 7.5% | | |
| | Dissipation Factor | Meets Initial Values (As Above) | | |
| | Insulation Resistance | Meets Initial Values (As Above) | | |
| | Dielectric Strength | Meets Initial Values (As Above) | | |
| Thermal Shock | Appearance | No visual defects | Step 1: -55°C \pm 2° | 30 \pm 3 minutes |
| | Capacitance Variation | \leq \pm 7.5% | Step 2: Room Temp | \leq 3 minutes |
| | Dissipation Factor | Meets Initial Values (As Above) | Step 3: +125°C \pm 2° | 30 \pm 3 minutes |
| | Insulation Resistance | Meets Initial Values (As Above) | Step 4: Room Temp | \leq 3 minutes |
| | Dielectric Strength | Meets Initial Values (As Above) | Repeat for 5 cycles and measure after 24 \pm 2 hours at room temperature | |
| Load Life | Appearance | No visual defects | Charge device with 1.5 rated voltage (\leq 10V) in test chamber set at 125°C \pm 2°C for 1000 hours (+48, -0) Remove from test chamber and stabilize at room temperature for 24 \pm 2 hours before measuring. | |
| | Capacitance Variation | \leq \pm 12.5% | | |
| | Dissipation Factor | \leq Initial Value x 2.0 (See Above) | | |
| | Insulation Resistance | \geq Initial Value x 0.3 (See Above) | | |
| | Dielectric Strength | Meets Initial Values (As Above) | | |
| Load Humidity | Appearance | No visual defects | Store in a test chamber set at 85°C \pm 2°C/ 85% \pm 5% relative humidity for 1000 hours (+48, -0) with rated voltage applied. Remove from chamber and stabilize at room temperature and humidity for 24 \pm 2 hours before measuring. | |
| | Capacitance Variation | \leq \pm 12.5% | | |
| | Dissipation Factor | \leq Initial Value x 2.0 (See Above) | | |
| | Insulation Resistance | \geq Initial Value x 0.3 (See Above) | | |
| | Dielectric Strength | Meets Initial Values (As Above) | | |



PREFERRED SIZES ARE SHADED

| SIZE | 0201 | | | 0402 | | | 0603 | | | | | | 0805 | | | | | | 1206 | | | | | | | | | | |
|-------------------|--------------------------------|----|----|--------------------------------|----|----|--------------------------------|----|----|----|----|-----|--------------------------------|-----|----|----|----|----|--------------------------------|-----|-----|----|----|----|----|-----|-----|-----|---|
| | Reflow Only | | | Reflow Only | | | Reflow Only | | | | | | Reflow/Wave | | | | | | Reflow/Wave | | | | | | | | | | |
| Packaging | All Paper | | | All Paper | | | All Paper | | | | | | Paper/Embossed | | | | | | Paper/Embossed | | | | | | | | | | |
| (L) Length (mm) | 0.60 ± 0.03 (0.024 ± 0.001) | | | 1.00 ± 0.10 (0.040 ± 0.004) | | | 1.60 ± 0.15 (0.063 ± 0.006) | | | | | | 2.01 ± 0.20 (0.079 ± 0.008) | | | | | | 3.20 ± 0.20 (0.126 ± 0.008) | | | | | | | | | | |
| (W) Width (mm) | 0.30 ± 0.03 (0.011 ± 0.001) | | | 0.50 ± 0.10 (0.020 ± 0.004) | | | 0.81 ± 0.15 (0.032 ± 0.006) | | | | | | 1.25 ± 0.20 (0.049 ± 0.008) | | | | | | 1.60 ± 0.20 (0.063 ± 0.008) | | | | | | | | | | |
| (t) Terminal (mm) | 0.15 ± 0.05 (0.006 ± 0.002) | | | 0.25 ± 0.15 (0.010 ± 0.006) | | | 0.35 ± 0.15 (0.014 ± 0.006) | | | | | | 0.50 ± 0.25 (0.020 ± 0.010) | | | | | | 0.50 ± 0.25 (0.020 ± 0.010) | | | | | | | | | | |
| WVDC | 10 | 16 | 25 | 16 | 25 | 50 | 6.3 | 10 | 16 | 25 | 50 | 100 | 200 | 6.3 | 10 | 16 | 25 | 50 | 100 | 200 | 6.3 | 10 | 16 | 25 | 50 | 100 | 200 | 500 | |
| Cap (pF) | 100 | A | A | A | | | | | | | | | | | | | | | | | | | | | | | | | |
| | 150 | A | A | A | | | | | | | | | | | | | | | | | | | | | | | | | |
| | 220 | A | A | A | | | C | | | | | | | | | | | | | | | | | | | | | | |
| | 330 | A | A | A | | | C | | | | | G | G | G | | J | J | J | J | J | J | | | | | | | | K |
| | 470 | A | A | | | | C | | | | | G | G | G | | J | J | J | J | J | J | | | | | | | | K |
| | 680 | A | A | | | | C | | | | | G | G | G | | J | J | J | J | J | J | | | | | | | | K |
| | 1000 | A | A | | | | C | | | | | G | G | G | | J | J | J | J | J | J | | | | | | | | K |
| Cap (µF) | 1500 | A | | | | C | | | | | G | G | G | | J | J | J | J | J | J | | J | J | J | J | J | J | M | |
| | 2200 | A | | | | C | | | | | G | G | G | | J | J | J | J | J | J | | J | J | J | J | J | J | M | |
| | 3300 | A | | | | C | | | | | G | G | G | | J | J | J | J | J | J | | J | J | J | J | J | J | M | |
| | 4700 | A | | | | C | | | | | G | G | G | | J | J | J | J | J | J | | J | J | J | J | J | J | M | |
| | 6800 | A | | | | C | | | | | G | G | G | | J | J | J | J | J | J | | J | J | J | J | J | J | M | |
| | 0.010 | A | | | | C | | | | | G | G | G | | J | J | J | J | J | J | | J | J | J | J | J | J | P | |
| | 0.015 | | | | | C | | | | | G | G | G | | J | J | J | J | J | J | | J | J | J | J | J | J | M | |
| 0.022 | | | | | C | | | | | G | G | G | | J | J | J | J | J | J | | J | J | J | J | J | J | M | | |
| 0.033 | | | | | | | | | | G | G | G | | J | J | J | J | N | | | J | J | J | J | J | J | M | | |
| 0.047 | | | | | | | | | | G | G | G | | J | J | J | J | N | | | J | J | J | J | J | J | M | | |
| 0.068 | | | | | | | | | | G | G | G | | J | J | J | J | N | | | J | J | J | J | J | J | M | | |
| 0.10 | | | | | | | | G | | G | | G | | J | J | J | J | N | | | J | J | J | J | J | M | P | | |
| 0.15 | | | | | | | G | | G | | | | | J | J | J | N | | | | J | J | J | J | J | J | | | |
| 0.22 | | | | | | | G | | | | J | | | J | J | N | | | | | J | J | J | J | J | J | | | |
| 0.33 | | | | | | | | | | | | | | N | N | N | N | | | | J | J | M | P | Q | Q | | | |
| 0.47 | | | | | | | | | | | | | | N | N | N | N | | | | M | M | M | P | Q | Q | | | |
| 0.68 | | | | | | | | | | | | | | N | N | N | N | | | | M | M | Q | Q | Q | Q | | | |
| 1.0 | | | | | | | | | | J | J | | | N | N | N | | | | | M | M | Q | Q | Q | Q | | | |
| 1.5 | | | | | | | | | | | | | | N | N | N | | | | | M | M | Q | Q | Q | Q | | | |
| 2.2 | | | | | | | | J | | | | | | | | | P | | | | Q | Q | Q | Q | | | | | |
| 3.3 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 4.7 | | | | | | | | | | | | | | | P | P | | | | | | | Q | Q | Q | | | | |
| 10 | | | | | | | | | | | | | | | P | | | | | | | | Q | Q | Q | | | | |
| 22 | | | | | | | | | | | | | | | | | | | | | | Q | | | | | | | |
| 47 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 100 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| WVDC | 10 | 16 | 25 | 16 | 25 | 50 | 6.3 | 10 | 16 | 25 | 50 | 100 | 200 | 6.3 | 10 | 16 | 25 | 50 | 100 | 200 | 6.3 | 10 | 16 | 25 | 50 | 100 | 200 | 500 | |
| SIZE | 0201 | | | 0402 | | | 0603 | | | | | | 0805 | | | | | | 1206 | | | | | | | | | | |

| Letter | A | C | E | G | J | K | M | N | P | Q | X | Y | Z |
|----------------|-----------------|-----------------|-----------------|-----------------|-----------------|-----------------|-----------------|-----------------|-----------------|-----------------|-----------------|-----------------|-----------------|
| Max. Thickness | 0.33 (0.013) | 0.56 (0.022) | 0.71 (0.028) | 0.90 (0.035) | 0.94 (0.037) | 1.02 (0.040) | 1.27 (0.050) | 1.40 (0.055) | 1.52 (0.060) | 1.78 (0.070) | 2.29 (0.090) | 2.54 (0.100) | 2.79 (0.110) |

PAPER

EMBOSSED

 = Under Development




X7R Dielectric



Capacitance Range

PREFERRED SIZES ARE SHADED

| SIZE | 1210 | | | | | | | | 1812 | | | | 1825 | | 2220 | | | | 2225 | | |
|--------------|--------------------------------|----|----|----|-----|-----|-----|----|--------------------------------|-----|-----|----|--------------------------------|----|--------------------------------|-----|-----|----|--------------------------------|---|---|
| | Reflow Only | | | | | | | | Reflow Only | | | | Reflow Only | | Reflow Only | | | | Reflow Only | | |
| Soldering | Paper/Embossed | | | | | | | | All Embossed | | | | All Embossed | | All Embossed | | | | All Embossed | | |
| Packaging | Paper/Embossed | | | | | | | | All Embossed | | | | All Embossed | | All Embossed | | | | All Embossed | | |
| (L) Length | 3.20 ± 0.20 (0.126 ± 0.008) | | | | | | | | 4.50 ± 0.30 (0.177 ± 0.012) | | | | 4.50 ± 0.30 (0.177 ± 0.012) | | 5.70 ± 0.40 (0.225 ± 0.016) | | | | 5.72 ± 0.25 (0.225 ± 0.010) | | |
| (W) Width | 2.50 ± 0.20 (0.098 ± 0.008) | | | | | | | | 3.20 ± 0.20 (0.126 ± 0.008) | | | | 6.40 ± 0.40 (0.252 ± 0.016) | | 5.00 ± 0.40 (0.197 ± 0.016) | | | | 6.35 ± 0.25 (0.250 ± 0.010) | | |
| (t) Terminal | 0.50 ± 0.25 (0.020 ± 0.010) | | | | | | | | 0.61 ± 0.36 (0.024 ± 0.014) | | | | 0.61 ± 0.36 (0.024 ± 0.014) | | 0.64 ± 0.39 (0.025 ± 0.015) | | | | 0.64 ± 0.39 (0.025 ± 0.015) | | |
| WVDC | 10 | 16 | 25 | 50 | 100 | 200 | 500 | 50 | 100 | 200 | 500 | 50 | 100 | 25 | 50 | 100 | 200 | 50 | 100 | | |
| Cap (pF) | 100 | | | | | | | | | | | | | | | | | | | | |
| | 150 | | | | | | | | | | | | | | | | | | | | |
| | 220 | | | | | | | | | | | | | | | | | | | | |
| | 330 | | | | | | | | | | | | | | | | | | | | |
| | 470 | | | | | | | | | | | | | | | | | | | | |
| | 680 | | | | | | | | | | | | | | | | | | | | |
| | 1000 | | | | | | | | | | | | | | | | | | | | |
| | 1500 | J | J | J | J | J | J | M | | | | | | | | | | | | | |
| | 2200 | J | J | J | J | J | J | M | | | | | | | | | | | | | |
| | 3300 | J | J | J | J | J | J | M | | | | | | | | | | | | | |
| | 4700 | J | J | J | J | J | J | M | | | | | | | | | | | | | |
| | 6800 | J | J | J | J | J | J | M | | | | | | | | | | | | | |
| Cap (µF) | 0.010 | J | J | J | J | J | J | M | K | K | K | K | M | M | | | X | X | X | M | P |
| | 0.015 | J | J | J | J | J | J | P | K | K | K | P | M | M | | | X | X | X | M | P |
| | 0.022 | J | J | J | J | J | J | Q | K | K | K | P | M | M | | | X | X | X | M | P |
| | 0.033 | J | J | J | J | J | J | Q | K | K | K | X | M | M | | | X | X | X | M | P |
| | 0.047 | J | J | J | J | J | J | | K | K | K | Z | M | M | | | X | X | X | M | P |
| | 0.068 | J | J | J | J | J | M | | K | K | K | Z | M | M | | | X | X | X | M | P |
| | 0.10 | J | J | J | J | J | M | | K | K | K | Z | M | M | | | X | X | X | M | P |
| | 0.15 | J | J | J | J | M | | | K | K | P | | M | M | | | X | X | X | M | P |
| | 0.22 | J | J | J | J | P | | | K | K | P | | M | M | | | X | X | X | M | P |
| | 0.33 | J | J | J | J | Z | | | K | M | | | M | M | | | X | X | | M | P |
| | 0.47 | M | M | M | M | Z | | | K | P | | | M | M | | | X | X | | M | P |
| | 0.68 | M | M | P | X | Z | | | M | Q | | | M | P | | | X | X | | M | P |
| | 1.0 | N | N | P | X | Z | | | M | X | | | M | P | | | X | Z | | M | P |
| | 1.5 | N | N | Z | Z | Z | | | Z | Z | | | M | | | | X | Z | | M | X |
| | 2.2 | X | X | Z | Z | Z | | | Z | Z | | | | | | | X | | | M | |
| | 3.3 | X | X | Z | Z | | | | Z | | | | | | | | X | | | | |
| | 4.7 | X | X | Z | Z | | | | Z | | | | | | | | X | | | | |
| | 10 | Z | Z | Z | | | | | Z | | | | | | | | Z | | | | |
| | 22 | | Z | | | | | | | | | | | | Z | | | | | | |
| | 47 | | | | | | | | | | | | | | | | | | | | |
| | 100 | | | | | | | | | | | | | | | | | | | | |

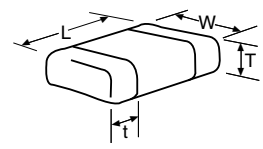

| Letter | A | C | E | G | J | K | M | N | P | Q | X | Y | Z |
|----------------|-----------------|-----------------|-----------------|-----------------|-----------------|-----------------|-----------------|-----------------|-----------------|-----------------|-----------------|-----------------|-----------------|
| Max. Thickness | 0.33 (0.013) | 0.56 (0.022) | 0.71 (0.028) | 0.90 (0.035) | 0.94 (0.037) | 1.02 (0.040) | 1.27 (0.050) | 1.40 (0.055) | 1.52 (0.060) | 1.78 (0.070) | 2.29 (0.090) | 2.54 (0.100) | 2.79 (0.110) |
| | PAPER | | | | | EMBOSS | | | | | | | |

= Under Development