

TTL OUTPUT FULL SIZE DIP 5.0V CRYSTAL CLOCK OSCILLATOR

ACT Series



RoHS
Compliant



20.4 x 12.9 x 5.3mm

FEATURES:

- Hermetically sealed metal package
- TTL output
- Case ground for EMI protection
- Tri-state Enable/Disable options

APPLICATIONS:

- Provide clock signals for microprocessors and digital circuits
- TTL output for low EMI applications

STANDARD SPECIFICATIONS:

PARAMETERS

ABRACON P/N	ACT Series
Frequency:	400kHz to 160MHz
Operating temperature:	-10°C to +60°C (see options)
Storage temperature:	- 55°C to + 125°C
Frequency Stability:	± 100ppm max. (see options)
Supply voltage (Vdd):	5.0Vdc ± 10%
Input current:	See Table 1
Symmetry @ 1.4Vdc:	40/60% max. @ 1.4V (see option)
Rise and Fall Times(Tr/Tf):	See Table 1
Output load:	10 TTL max.
Output Voltage:	VOH = 2.4 * Vdd min. VOL = 0.4*Vdd max.
Tri State Function:	"1" (VIH >= 2.2 Vdc) or open: Oscillation "0" (VIL < 0.8V): Hi Z
Output Disable/ Enable time:	100 ns max. (for Option "-A" ONLY)
Start-up-time:	10 to 35 ms max

Table1

Frequency (MHz)	Input current Idd (mA)	Rise and Fall Time Tr/Tf (ns)
400.0kHz F≤24.9MHz	20	10
25.0MHz F≤100.0MHz	40	5
100.0MHz F≤160.0MHz	80	4

OPTIONS & PART IDENTIFICATION:

(Left blank if standard)

ACT - Frequency - □ - □ - □ - □ - □

Temperature Options	
I	0°C to +50°C
E	-20°C to +70°C
F	-30°C to +70°C
N	-30°C to +85°C
L	-40°C to +85°C

Freq. Stability	
Y5*	±15 ppm max.
J*	±20 ppm max.
R**	±25 ppm max.
K	±30 ppm max.
H	±35 ppm max.
C	±50 ppm max.

* Available for temp options I and E only

** Available for temp options I, E, F, and N only

Symmetry Options	
S*	45/55% @1/4V

* F<70 only.

Tristate Enable Funct	
A	Tristate Function

Packaging	
T	Tape and Reel
TY	Tray

Value Added Option	
G	Gull Wing
G3	Gull Wing
GHT	Gull Wing reflow
Q45	0.45(11.43)
Q40	0.40(10.16)
Q35	0.35(8.89)
Q30	0.30(7.62)
Q25	0.25(6.35)
Q20	0.20(5.08)
Q15	0.15(3.81)
Q10	0.10(2.54)



TTL OUTPUT FULL SIZE DIP 5.0V CRYSTAL CLOCK OSCILLATOR

ACT Series




RoHS
Compliant



20.4 x 12.9 x 5.3mm

OUTLINE DIMENSIONS

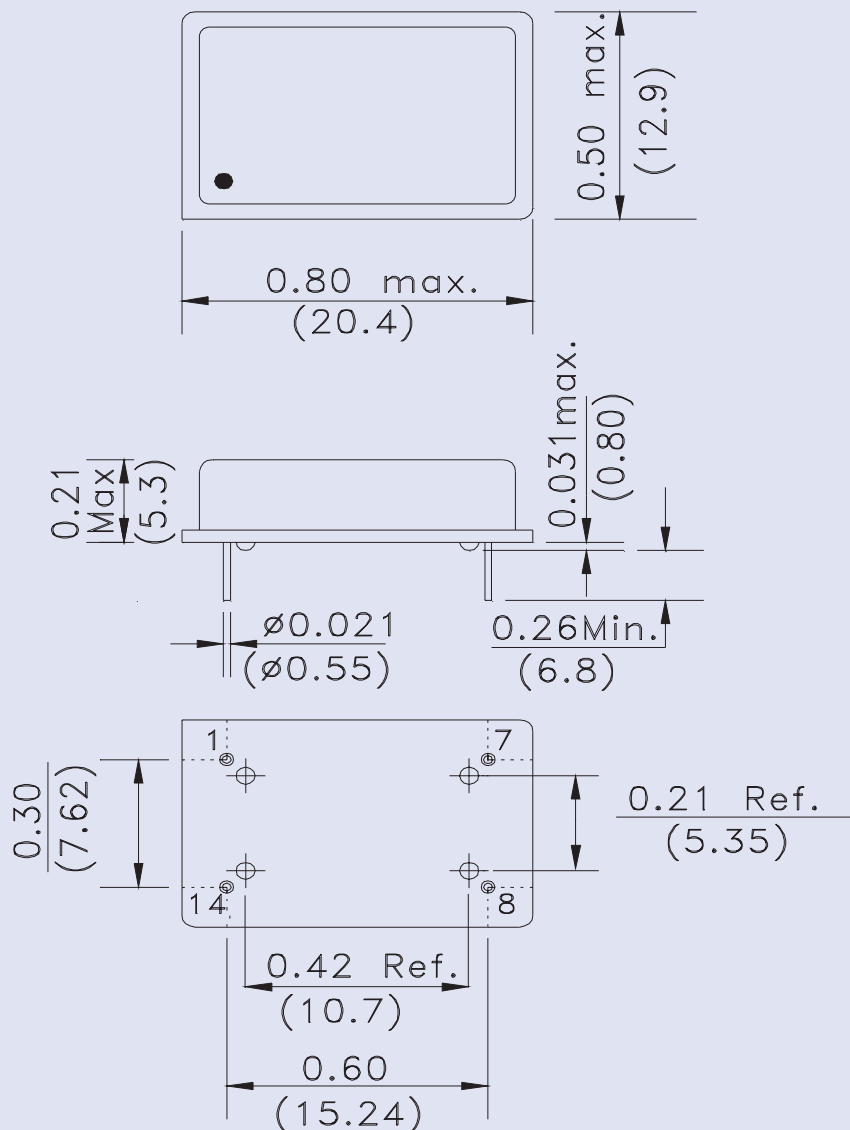

PIN	FUNCTION
1	NC or Tristate Enable/ Disable
7	GND/Case
8	Output
14	Vdd

Note: Remomended using a approximately 0.01uF bypass capacitor between Pin 7 and 14

Dimensions: inches (mm)