





More Precision.

induSENSOR

Linear inductive displacement sensors



EDS series: long-stroke sensors for hydraulics & pneumatics

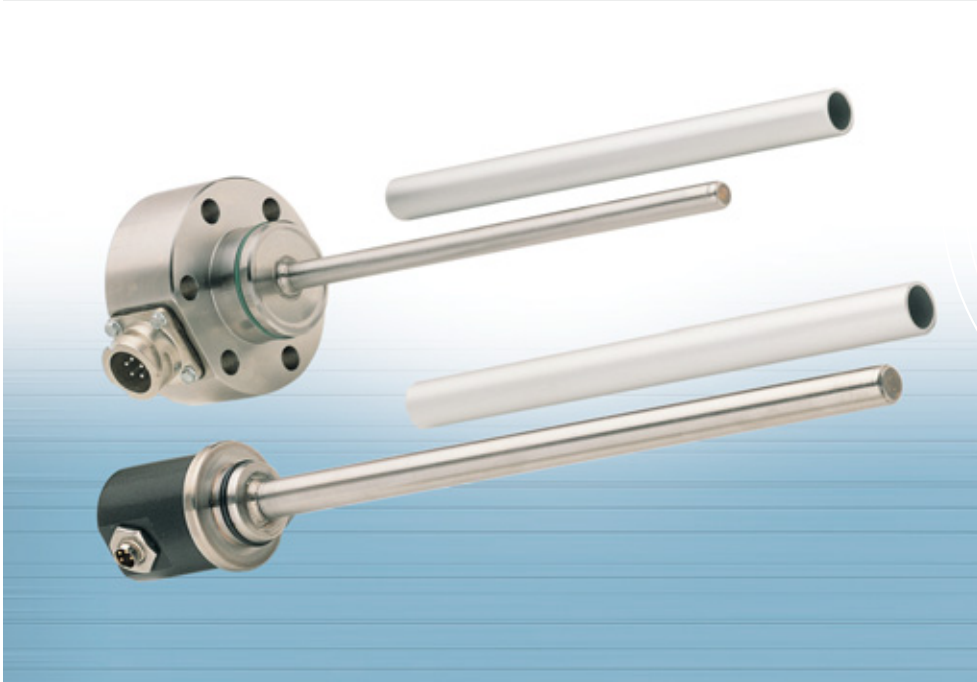

Measurement ranges 100 ... 630 mm
Output signal 4 ... 20 mA
Integrated microelectronics
High pressure resistance
Oil resistant and maintenance-free
Short offset ranges

The sensor elements of the EDS series are protected by a pressure resistant stainless steel housing. The sensor electronics and signal conditioning are completely integrated in a sensor flange.

As a target an aluminum sleeve is used which is integrated into the piston rod and is passed without making contact and wear-free over the sensor rod.

Due to the use of the eddy current principle, no permanent magnets need to be mounted inside the cylinder.

Due to the rugged design of the long-stroke sensors of the EDS series, these sensor systems have proven themselves, not only through the integration in hydraulic and pneumatic cylinders, but also especially under harsh industrial conditions.

Typical applications

Long-stroke sensors in the EDS series are designed for industrial use in hydraulic and pneumatic cylinders for the displacement and position measurement of pistons or valves, e.g. for the measurement of

- displacement, distance, position, gap
- deflection
- movement, stroke
- filling level, immersion depth, spring travel

Artikelbezeichnung

EDS - 300 - S - SR7 - I

electrical output

SRB = connector, radial Bajonet (model F)

SA7 = connector, axial (model S)

SR7 = connector, radial (model S)

LA = axial stranded wire (100 mm)

Models: S = compact design with alu cap

F = flange housing with mounting holes

Z = socket flange

measuring range in mm




Integration in a hydraulic cylinder


Model		EDS-100	EDS-160	EDS-200	EDS-220	EDS-250	EDS-260	EDS-300	EDS-370	EDS-400	EDS-630
Connection		S, F	S, F	S	Z	S, F	Z	S, F, Z	Z	S, F, Z	S, F
Measuring range	mm	100	160	200	220	250	260	300	370	400	630
Linearity	±0.3 % FSO	mm	0.3	0.48	0.6	0.66	0.75	0.78	0.9	1.1	1.89
Resolution	0.05 % FSO	mm	0.05	0.08	0.1	0.11	0.125	0.13	0.15	0.18	0.315
Temperature range		-40 °C ... +85 °C									
Temperature stability		±200 ppm / °C									
Frequency response (-3 dB)		150 Hz									
Output		4 - 20 mA									
Output load		≤500 Ohm									
Power supply		18 - 30 VDC									
Current consumption		max. 40 mA									
Connector	model S	4-pin connector (sensor cable as an option) options radial or axial output									
	model F	5-pin radial bayonet-connector with mating plug									
	model Z	wire axial									
Pressure resistance		450 bar (sensor rod, flange)									
Protection class		IP 67									
Electromagnetic compatibility (EMC) ²		EN 50 081-2 spurious emission EN 50 082-2 interference immunity									
Shock ¹	IEC 68-2-29 IEC 68-2-27	40 g, 3000 shocks / axis 100 g radial, 300 g axial									
Vibration	IEC 68-2-6	5 Hz ... 44 Hz ±2.5 mm 44 Hz ... 500 Hz ±23 g									
Material		V4A-Steel 1.4571									

FSO = Full Scale Output 1) Half sinusoid 6 ms 2) model Z only when integrated


Model S

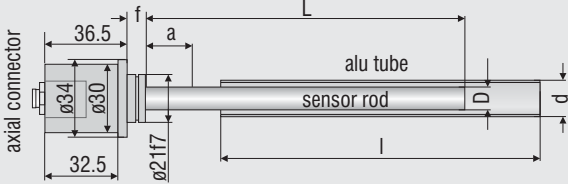

Model Z

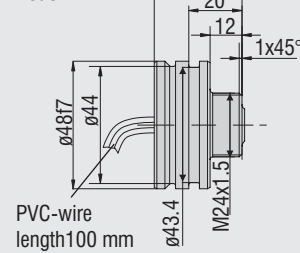

Model F

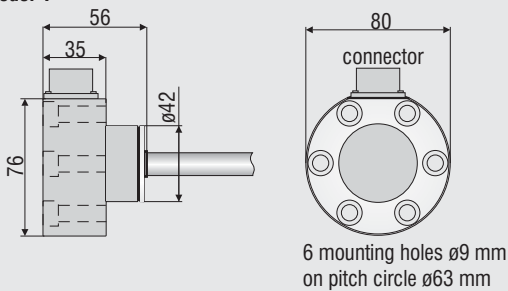

meas. range	sensor rod		alu tube		offset		flange	
	L	D	l	d	a	f		
100	140	10	140	16	20	8		
160	200	10	200	16	20	8		
200	240	10	240	16	20	8		
220	250	10	252	16	20	12		
250	290	10	290	16	20	8		
260	290	10	292	16	20	12		
300	340	10	340	16	20	8		
370	464	12	450	18	15	12		
400	450	12	450 s, z	460 f	18 s, z	26 f	25	12
630	680	12	680 s, z	690 f	18 s, z	26 f	25	12

More Precision.

www.micro-epsilon.com

Sensors and systems

for displacement, position and dimension

Sensors and measurement devices

for non-contact temperature measurement

Measurement systems

for online/offline quality control

MICRO-EPSILON Headquarters

Koenigbacher Str. 15 · 94496 Ortenburg / Germany

Tel. +49 (0) 8542 / 168-0 · Fax +49 (0) 8542 / 168-90

info@micro-epsilon.com

MICRO-EPSILON UK Ltd.

Dorset House, West Derby Road · Liverpool, L6 4BR

Phone +44 (0) 151 260 9800 · Fax +44 (0) 151 261 2480

info@micro-epsilon.co.uk

MICRO-EPSILON USA

8120 Brownleigh Dr. · Raleigh, NC 27617 / USA

Phone +1/919/787-9707 · Fax +1/919/787-9706

info@micro-epsilon.us

