


CONSTANT VOLTAGE REGULATION.
TRANSIENT SUPPRESSORS.

- Average Power Dissipation : $P=1.0W$
- Zener Voltage : $V_Z=12\sim390V$
- Surface Mounting Plastic Mold Package

Unit in mm

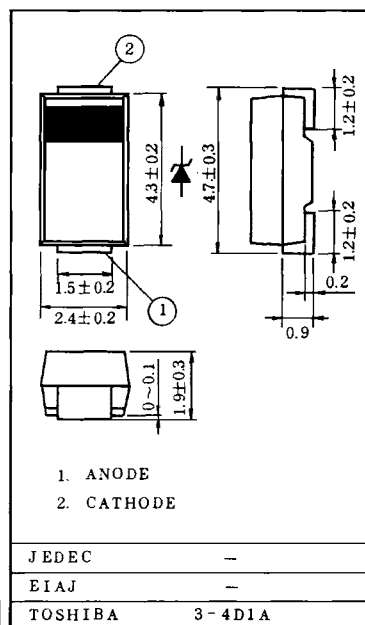


Weight: 0.06g


MAXIMUM RATINGS

CHARACTERISTIC	SYMBOL	RATING	UNIT
Power Dissipation	P_D	1.0	W
Junction Temperature	T_j	150	°C
Storage Temperature Range	T_{stg}	-40~150	°C

Standard soldering pad



Mark

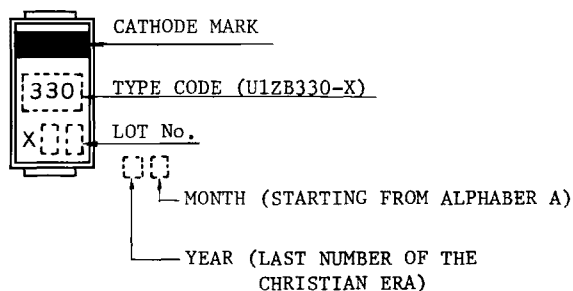

U1ZB12~U1ZB51

ELECTRICAL CHARACTERISTICS (Ta=25°C)

Type	Zener Characteristics					Temperature Coefficient of Zener Voltage at T (mV/°C)		Forward Voltage V _F (V)	Measurement Current I _F (A)	Reverse Current I _R (μA)	Measurement Voltage V _R (V)
	Zener Voltage V _Z (V)			Zener Impedance r _d (Ω)	Measurement Current I _Z (mA)	at T (mV/°C)					
	MIN.	TYP.	MAX.			MAX.	TYP.	MAX.	MAX.		
U1ZB12	10.8	12	13.2	30	10	8	13	1.2	0.2	10	8
U1ZB13	11.7	13	14.3	30	10	9	14	1.2	0.2	10	9
U1ZB15	13.5	15	16.5	30	10	11	17	1.2	0.2	10	10
U1ZB16	14.4	16	17.6	30	10	12	19	1.2	0.2	10	11
U1ZB18	16.2	18	19.8	30	10	14	23	1.2	0.2	10	13
U1ZB20	18.0	20	22.0	30	10	16	26	1.2	0.2	10	14
U1ZB22	19.8	22	24.2	30	10	18	28	1.2	0.2	10	16
U1ZB24	21.6	24	26.4	30	10	20	32	1.2	0.2	10	17
U1ZB27	24.3	27	29.7	30	10	23	36	1.2	0.2	10	19
U1ZB30	27.0	30	33.0	30	10	25	40	1.2	0.2	10	21
U1ZB33	29.7	33	36.3	30	10	26	41	1.2	0.2	10	26.4
U1ZB36	32.4	36	39.6	30	9	28	45	1.2	0.2	10	28.8
U1ZB43	38.7	43	47.3	40	7	33	53	1.2	0.2	10	34.4
U1ZB47	42.3	47	51.7	65	6	38	60	1.2	0.2	10	37.6
U1ZB51	45.9	51	56.1	65	6	43	68	1.2	0.2	10	40.8
U1ZB68	61.2	68	74.8	120	4	57	90	1.2	0.2	10	54.4
U1ZB75	67.5	75	82.5	150	4	66	104	1.2	0.2	10	60
U1ZB82	73.8	82	90.2	170	3	71	113	1.2	0.2	10	65.4
U1ZB100	90	100	110	300	3	87	138	1.2	0.2	10	80
U1ZB110	99	110	121	300	3	96	152	1.2	0.2	10	88
U1ZB150	135	150	165	450	2	136	212	1.2	0.2	10	120
U1ZB180	162	180	198	500	1.5	161	255	1.2	0.2	10	144
U1ZB200	180	200	220	500	0.5	170	269	1.2	0.2	10	160
U1ZB200-Y	190	200	210			170	269				160
U1ZB200-Z	200	210	220			178	286				168
U1ZB220	198	220	242	5000	0.5	200	309	1.2	0.2	10	176
U1ZB220-Y	210	220	230			200	309				176
U1ZB220-Z	220	230	240			207	320				184
U1ZB240	216	240	264	5000	0.5	215	342	1.2	0.2	10	192
U1ZB240-Y	230	240	250			215	325				216
U1ZB240-Z	240	250	260			225	338				225
U1ZB270	243	270	297	5000	0.5	243	385	1.2	0.2	10	216
U1ZB270-X	250	260	270			221	350				234
U1ZB270-Y	260	270	280			228	362				243
U1ZB270-Z	270	280	290	5000	0.5	236	374	1.2	0.2	10	252
U1ZB300	270	300	330			270	428				240
U1ZB300-X	280	290	300			244	388				261
U1ZB300-Y	290	300	310	5000	0.5	253	402	1.2	0.2	10	270
U1ZB300-Z	300	310	320			261	415				279
U1ZB330	297	330	363	5000	0.5	296	470	1.2	0.2	10	264
U1ZB330-X	310	320	330			270	428				288
U1ZB330-Y	320	330	340			278	441				297
U1ZB330-Z	330	340	350	10000	0.5	287	455	1.2	0.2	10	306
U1ZB390	351	390	429			350	555				312

