



STRAIGHT PLUG with standard compression nut




Types
ZPLD
ZPED

To specify a complete plug, substitute the Dash No. of the contact insert selected, for the Asterisk (*) in the Catalog No. below. NOTE: The jack nut should not be used with current rupture insert configurations.


Size Cable	Shell Size	Cat. No. With Standard Coupling Nut	DIMENSIONS WITH STANDARD CABLE ADAPTER			Cat. No. With Jack Coupling Nut
			A	B	C	
			A PLUG WITH JACK COUPLING NUT SHOULD BE USED WITH INSERTS HAVING 37 OR MORE CONTACTS			
Select from Table Below and Substitute Symbol No. for Delta Δ	12	ZPLD-Δ 12-*	5 9/8	1 13/16	5 31/32	ZPLDJ-Δ 12-*
	16	ZPLD-Δ 16-*	5 5/8	2 5/16	6 7/32	ZPLDJ-Δ 16-*
	20	ZPLD-Δ 20-*	6 1/8	2 13/16	6 23/32	ZPLDJ-Δ 20*
	C20	ZPLD-Δ C20-*	6 5/8	2 13/16	7 7/32	ZPLDJ-Δ C20*
	24	ZPLD-Δ 24-*	6 5/8	3 5/16	7 7/32	ZPLDJ-Δ 24*
	C24	ZPLD-Δ C24-*	7 1/8	3 5/16	7 23/32	ZPLDJ-Δ C24*
	28	ZPLD-Δ 28-*	7 1/8	3 13/16	7 23/32	ZPLDJ-Δ 28*
	C28	ZPLD-Δ C28-*	7 5/8	3 13/16	8 7/32	ZPLDJ-Δ C28*
	WITH LONG CABLE ADAPTER					
	12	ZPLDL-Δ 12-*	7 5/8	1 13/16	8 7/32	ZPLDLJ-Δ 12-*
	16	ZPLDL-Δ 16-*	7 7/8	2 5/16	8 15/32	ZPLDLJ-Δ 16-*
	20	ZPLDL-Δ 20-*	8 3/8	2 13/16	8 31/32	ZPLDLJ-Δ 20*
C20	ZPLDL-Δ C20*	8 7/8	2 13/16	9 15/32	ZPLDLJ-Δ C20*	
24	ZPLDL-Δ 24-*	8 7/8	3 5/16	9 15/32	ZPLDLJ-Δ 24*	
C24	ZPLDL-Δ C24*	9 3/8	3 5/16	9 31/32	ZPLDLJ-Δ C24*	
28	ZPLDL-Δ 28-*	9 1/8	3 13/16	9 23/32	ZPLDLJ-Δ 28*	
C28	ZPLDL-Δ C28*	9 5/8	3 13/16	10 7/32	ZPLDLJ-Δ C28*	

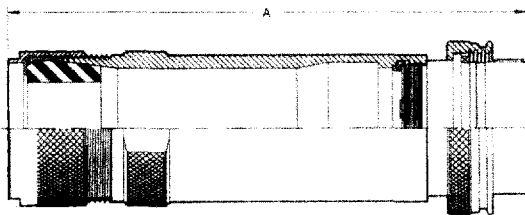

SAFETY WIRE HOLES
(3) .062 DIA.

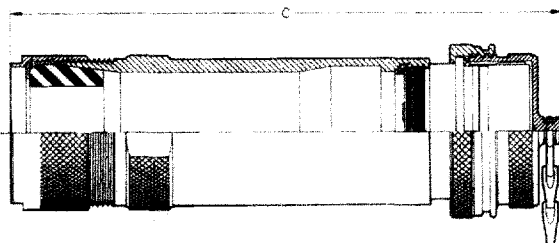

To specify plug with environmental cover, change third letter in Part No. "L" to "E".
Example: ZPLD changes to ZPED.



OIL-RESISTANT RUBBER GROMMETS—SYMBOL NUMBERS OF SIZES AVAILABLE

Substitute the symbol Number for the Delta Δ in the Catalog Number of Plug.
Example: ZPLD-Δ 12-* for .500 to .625 Dia. Cable changes to ZPLD-10 12-*.

Cable Dia.	Shell 12	Shell 16	Shells 20 & C20	Shells 24 & C24	Shells 28 & C28	Cable Dia.	Shell 12	Shell 16	Shells 20 & C20	Shells 24 & C24	Shells 28 & C28
.062 to .125	02	1.500 to 1.625	26	26	26
.125 to .250	04	1.625 to 1.750	28	28	28
.250 to .375	06	06	1.750 to 1.875	30	30	30
.375 to .500	08	08	1.875 to 1.937	31
.500 to .625	10	10	10	1.875 to 2.000	32	32
.625 to .750	12	12	12	2.000 to 2.125	34	34
.750 to .875	14	14	14	2.125 to 2.250	36	36
.875 to .937	15	2.250 to 2.375	38	38
.875 to 1.000	..	16	16	16	..	2.375 to 2.437	39	..
1.000 to 1.125	..	18	18	18	..	2.375 to 2.500	40
1.125 to 1.250	..	20	20	20	..	2.500 to 2.625	42
1.250 to 1.375	..	22	22	22	..	2.625 to 2.750	44
1.375 to 1.437	..	23	2.750 to 2.875	46
1.375 to 1.500	24	24	24						