
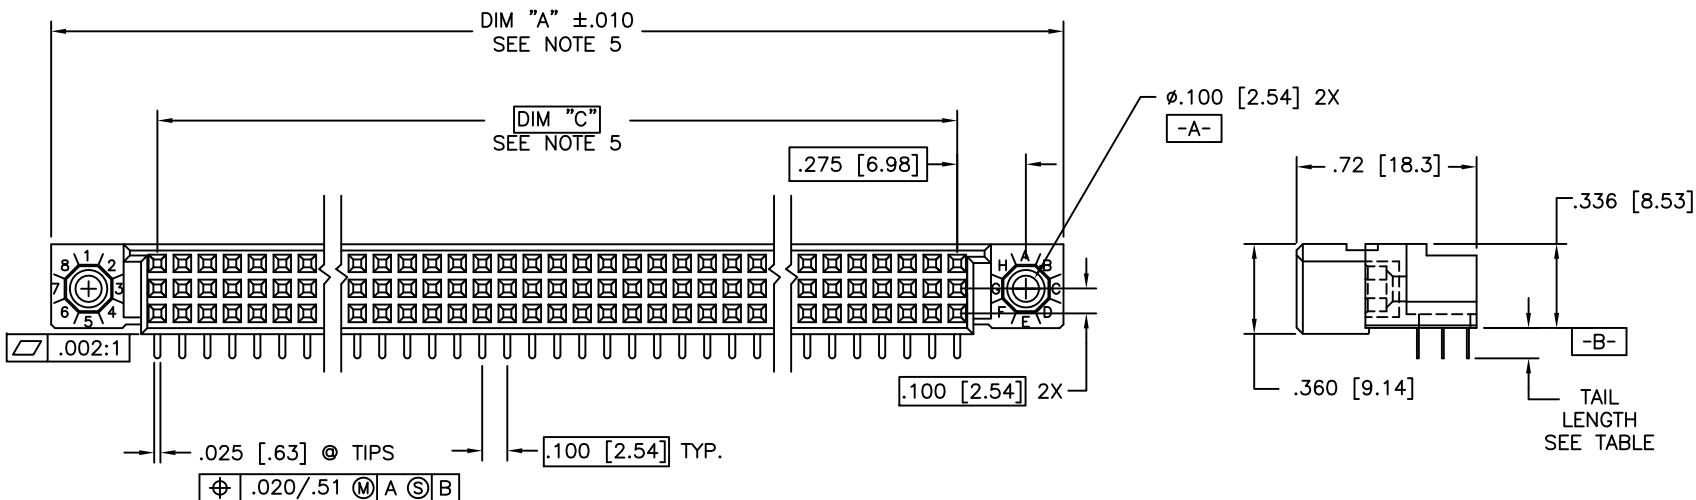




PRODUCT NUMBER

SEE NOTE 1

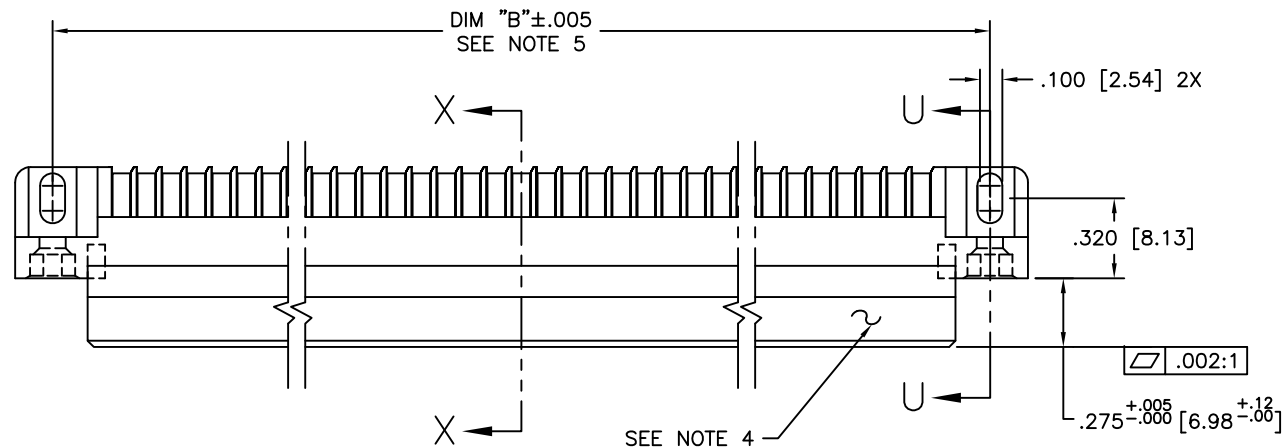

mat'l. code NOTE 3				surface ISO 1802	tolerance ISO 406 ISO 1101	projection INCH/MM	product family HPC
ltr	ec'n no	dr	date	tolerances unless otherwise specified			title
L	v00253	JWS	1/12/00	angles	linear	XX ±.01/XX0.3	3 ROW R/A RECEPTACLE SOLDER TAIL, 0 GUIDE PIN
M	v03-0301	TAB	4/30/03			.XXX ±.005/XXX0.13	
N	v05-0700	DAU	8/25/05	σ±2		.XXX ±.0020/XXX0.05	
P	M06-0255	AEA	7/06/06	dr	D. SHEAFFER	1/04/90	
R	M07-0331	AGS	7/18/07	engr	S. CLARK	1/04/90	dwg no
S	M07-0183	MHT	7/22/08	chr	S. CLARK	1/04/90	50000
T	M08-0280	AGS	30/09/08	appd	S. CLARK	1/04/90	sheet 1 of 4
sheet	revision	T	T	T	T		size
index	sheet	1	2	3	4		A3
							type
							Product Customer Drawing

PRODUCT NUMBER  
SEE TABLE

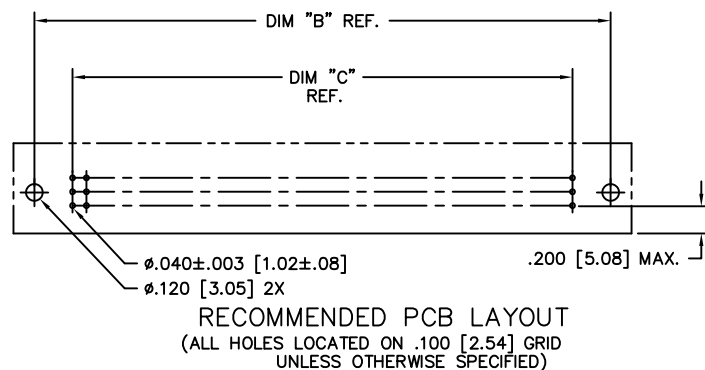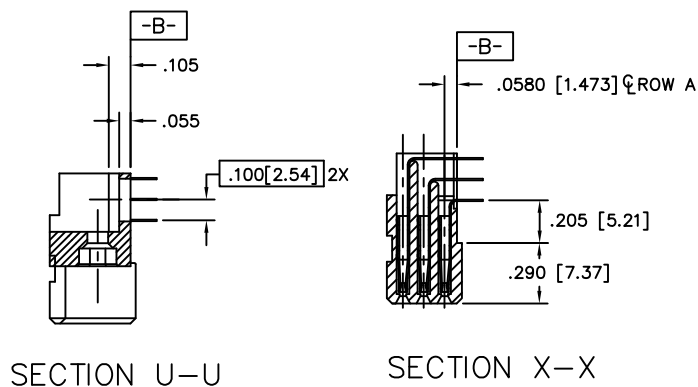

NOTES:

① PRODUCT NUMBERING CODE:  
50000 - X YYY Z LF  
LEAD FREE (OPTIONAL)  
TAIL LENGTH (SEE TABLE)  
NO. OF POSITIONS (SEE NOTE 2)  
PLATING (SEE TABLE)  
BASE NUMBER

PRODUCT NUMBERING CODE FOR  
SELECT LOAD PART NUMBERS:  
50000 - XYYYY LF  
LEAD FREE (OPTIONAL)  
SEQUENCE NUMBER  
ALWAYS 'XX'  
BASE NUMBER

- ② THIS PRODUCT IS CONFIGURED IN SIZES OF 6 THRU 80 COLUMNS IN INCREMENTS OF ONE.  
i.e.: 6,7,8,9.....79,80.
- ③ HOUSING MATERIAL: GLASS AND MINERAL FILLED THERMOPLASTIC.  
FLAME RETARDANT PER UL94V-0. COLOR: BLACK  
CONTACT MATERIAL: BeCu
- ④ COMPANY NAME, PART NUMBER AND LOT CODE TO APPEAR ON THIS SURFACE PER BUS-12-108.
- ⑤ LENGTH FORMULAS:  
DIM A = .100/2.54 X NO. OF COLUMNS + .75/19.1  
DIM B = .100/2.54 X NO. OF COLUMNS + .450/11.43  
DIM C = .100/2.54 X NO. OF COLUMNS - .100/2.54
- ⑥ PRODUCT WITH "LF" SUFFIX MEETS EUROPEAN UNION DIRECTIVES AND OTHER COUNTRY REGULATIONS AS DESCRIBED IN GS-22-008.
7. THIS HOUSING WILL WITHSTAND EXPOSURE TO 260° C PEAK TEMPERATURE FOR 10-30 SECONDS IN A CONVECTION, INFRA-RED OR VAPOR PHASE REFLOW OVEN.
- ⑧ PLATING OPTION:  
MAY BE EITHER GOLD OR GXT PLATED AT MANUFACTURER'S OPTION.

mat'l. code NOTE 3				surface ISO 1902	tolerance ISO 406 ISO 1101	projection INCH/MM	product family HPC
ltr	ecr no	dr	date	tolerances unless otherwise specified		scale 1:1	title 3 ROW R/A RECEPTACLE SOLDER TAIL, 0 GUIDE PIN
T				angles	linear		dwg no 50000
				$\sigma \pm 2^\circ$	$.XX \pm .01 / .XX \pm .03$ $.XXX \pm .005 / .XXX \pm .013$ $.XXXX \pm .0020 / .XXXX \pm .005$		sheet 2 of 4 size A3
				dr	D. SHEAFFER 1/04/90	FCI	type Product Customer Drawing
				engr	S. CLARK 1/04/90		
				chr	S. CLARK 1/04/90		
				appd	S. CLARK 1/04/90		
sheet index	revision sheet						

PRODUCT NUMBER NOTE 1	NUMBER OF POSITIONS NOTE 2	TAIL LENGTH	SOLDER TAIL PLATING	CONTACT PLATING (NOTE 8)
50000-1YYE	YYY	.125±.010/3.18±0.25	TIN-LEAD	30u"/0.76um Au
50000-1YYELF	YYY	.125±.010/3.18±0.25	TIN	30u"/0.76um Au
50000-1YYF	YYY	.145±.010/3.68±0.25	TIN-LEAD	30u"/0.76um Au
50000-1YYH	YYY	.180±.010/4.57±0.25	TIN-LEAD	30u"/0.76um Au
50000-1YYZ	YYY	.220±.010/5.59±0.25	TIN-LEAD	30u"/0.76um Au
50000-3YYE	YYY	.125±.010/3.18±0.25	TIN-LEAD	50u"/1.27um Au
50000-3YYF	YYY	.145±.010/3.68±0.25	TIN-LEAD	50u"/1.27um Au
50000-3YYH	YYY	.180±.010/4.57±0.25	TIN-LEAD	50u"/1.27um Au
50000-3YYZ	YYY	.220±.010/5.59±0.25	TIN-LEAD	50u"/1.25um Au
50000-5YYE	YYY	.125±.010/3.18±0.25	TIN-LEAD	30u"/0.76um GXT
50000-5YYELF	YYY	.125±.010/3.18±0.25	TIN	30u"/0.76um GXT
50000-5YYF	YYY	.145±.010/3.68±0.25	TIN-LEAD	30u"/0.76um GXT
50000-5YYFLF	YYY	.145±.010/3.68±0.25	TIN	30u"/0.76um GXT
50000-5YYH	YYY	.180±.010/4.57±0.25	TIN-LEAD	30u"/0.76um GXT
50000-5YYHLF	YYY	.180±.010/4.57±0.25	TIN	30u"/0.76um GXT
50000-5YYZ	YYY	.220±.010/5.59±0.25	TIN-LEAD	30u"/0.76um GXT
50000-5YYZLF	YYY	.220±.010/5.59±0.25	TIN	30u"/0.76um GXT



mat'l. code NOTE 3				surface ISO 1802 <input checked="" type="checkbox"/>		tolerance ISO 406 ISO 1101		projection 		product family HPC			
ltr	ecr no	dr	date	tolerances unless otherwise specified						title			
T				angles	linear	.XX ±.01/.XX±0.3		INCH/MM		3 ROW R/A RECEPTACLE			
				0°±2°		.XXX ±.005/.XXX±0.13		scale 1:1		SOLDER TAIL, 0 GUIDE PIN			
				dr	D. SHEAFFER	1/04/90				dwg no		sheet 3 of 4	size
				enr	S. CLARK	1/04/90				50000		A3	
				chr	S. CLARK	1/04/90							
				appd	S. CLARK	1/04/90							
sheet index		revision sheet											

SEE TABLE

[illegible][illegible]

1. ALL POSITIONS ARE LOADED AS SHOWN.
2. COLUMN 1, ROW A IS DESIGNATED AS SIGNAL TERM. 1, AS VIEWED FROM THE MATING FACE.
3. SIGNAL DATA FOR 50000-XX001 OR 50000-XX001LF  
SIZE 3 X 55  
TOTAL NUMBER OF POSITIONS: 165  
TOTAL NUMBER OF POSITIONS LOADED: 107

ITEM KEY	QTY.	TAIL LENGTH
A	45	.180±.010/4.57±.25
B	17	.180±.010/4.57±.25
C	45	.180±.010/4.57±.25

mat'l. code NOTE 3				surface ISO 1302 ✓		tolerance ISO 406 ISO 1101		projection 		product family HPC			
lfr ecn no dr date				tolerances unless otherwise specified				INCH/MM		title 3 ROW R/A RECEPTACLE SOLDER TAIL, 0 GUIDE PIN			
T				angles		linear							
						XX ±.01/XX±0.3		scale 1:1		dwg no sheet 4 of 4 size 50000 A.			
						XXX ±.005/XXX±0.13							
				0±.2		XXXX ±.0020/XXX±0.05				type Product Customer Drawing			
				dr		D. SHEAFFER 1/04/90							
				enrg		S. CLARK 1/04/90							
				chr		S. CLARK 1/04/90							
				appd		S. CLARK 1/04/90							
sheet index		revision sheet											