



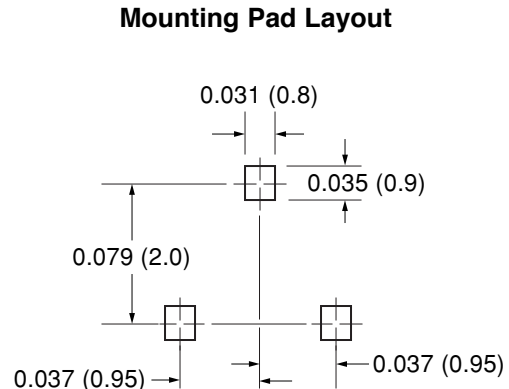


## Dual Common-Anode Zener Diodes

**V<sub>Z</sub> Range** 2.7 to 51V  
**Power Dissipation** 300mW

**TO-236AB**  
**(SOT-23)**

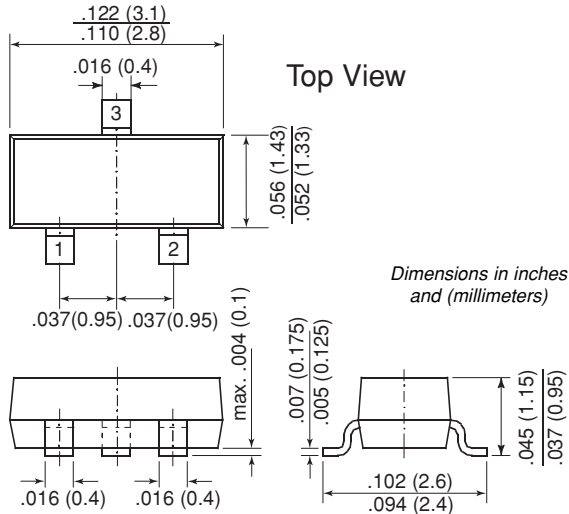

Dimensions in inches and (millimeters)



### Features

- Dual Silicon Planar Zener Diodes, Common Anode
- The Zener voltages are graded according to the international E 24 standard. Standard Zener voltage tolerance is  $\pm 5\%$ . Replace "C" with "B" for 2% tolerance. Other voltage tolerances and other Zener voltages are available upon request.
- The parameters are valid for both diodes in one case.  $\Delta V_Z$  and  $\Delta r_{zj}$  of the two diodes in one case is  $\leq 5\%$
- These diodes are also available in other case styles and configurations including: the dual diode common cathode configuration with type designation DZ23, the single diode SOT-23 case with the type designation BZX84C, and the single diode SOD-123 case with the type designation BZT52C.

### Mechanical Data

**Case:** SOT-23 Plastic Package

**Weight:** Approx. 0.00028 oz., 0.008 g

**Packaging Codes/Options:**

E8/10K per 13" reel (8mm tape), 30K/box

E9/3K per 7" reel (8mm tape), 30K/box

### Maximum Ratings and Thermal Characteristics (T<sub>A</sub> = 25°C unless otherwise noted)

Parameter	Symbol	Value	Unit
Power Dissipation at T <sub>amb</sub> = 25°C	P <sub>D</sub>	300 <sup>(1)</sup>	mW
Thermal Resistance Junction to Ambient Air	R <sub>θJA</sub>	420 <sup>(1)</sup>	°C/W
Junction Temperature	T <sub>J</sub>	150	°C
Storage Temperature Range	T <sub>S</sub>	-65 to +150	°C

**Note:** (1) Device on fiberglass substrate, see layout.

## Electrical Characteristics (T<sub>A</sub> = 25°C unless otherwise noted)

Type y = C for 5% y = B for 2%	Marking	Dynamic Resistance		Temp. Coeff. of Zener Voltage at I <sub>Z</sub> = 5mA α <sub>VZ</sub> (10 <sup>-4</sup> /°C)	Reverse Voltage at I <sub>R</sub> = 100nA V <sub>R</sub> (V)
		at I <sub>Z</sub> = 5mA f = 1kHz r <sub>Zj</sub> (Ω)	at I <sub>Z</sub> = 1mA f = 1kHz r <sub>Zj</sub> (Ω)		
AZ23-y2V7	D1	75 (<83)	<500	-9 ... -4	-
AZ23-y3	D2	80 (<95)	<500	-9 ... -3	-
AZ23-y3V3	D3	80 (<95)	<500	-8 ... -3	-
AZ23-y3V6	D4	80 (<95)	<500	-8 ... -3	-
AZ23-y3V9	D5	80 (<95)	<500	-7 ... -3	-
AZ23-y4V3	D6	80 (<95)	<500	-6 ... -1	-
AZ23-y4V7	D7	70 (<78)	<500	-5 ... +2	-
AZ23-y5V1	D8	30 (<60)	<480	-3 ... +4	>0.8
AZ23-y5V6	D9	10 (<40)	<400	-2 ... +6	>1
AZ23-y6V2	D10	4.8 (<10)	<200	-1 ... +7	>2
AZ23-y6V8	D11	4.5 (<8)	<150	+2 ... +7	>3
AZ23-y7V5	D12	4 (<7)	<50	-3 ... +7	>5
AZ23-y8V2	D13	4.5 (<7)	<50	+4 ... +7	>6
AZ23-y9V1	D14	4.8 (<10)	<50	+5 ... +8	>7
AZ23-y10	D15	5.2 (<15)	<70	+5 ... +8	>7.5
AZ23-y11	D16	6 (<20)	<70	+5 ... +9	>8.5
AZ23-y12	D17	7 (<20)	<90	+6 ... +9	>9
AZ23-y13	D18	9 (<25)	<110	+7 ... +9	>10
AZ23-y15	D19	11 (<30)	<110	+7 ... +9	>11
AZ23-y16	D20	13 (<40)	<170	+8 ... +9.5	>12
AZ23-y18	D21	18 (<50)	<170	+8 ... +9.5	>14
AZ23-y20	D22	20 (<50)	<220	+8 ... +10	>15
AZ23-y22	D23	25 (<55)	<220	+8 ... +10	>17
AZ23-y24	D24	28 (<80)	<220	+8 ... +10	>18
AZ23-y27	D25	30 (<80)	<250	+8 ... +10	>20
AZ23-y30	D26	35 (<80)	<250	+8 ... +10	>22.5
AZ23-y33	D27	40 (<80)	<250	+8 ... +10	>25
AZ23-y36	D28	40 (<90)	<250	+8 ... +10	>27
AZ23-y39	D29	50 (<90)	<300	+10 ... +12	>29
AZ23-y43	D30	60 (<100)	<700	+10 ... +12	>32
AZ23-y47	D31	70 (<100)	<750	+10 ... +12	>35
AZ23-y51	D32	70 (<100)	<750	+10 ... +12	>38

Note: (1) Tested with pulses t<sub>p</sub> = 5ms

**Electrical Characteristics** (T<sub>A</sub> = 25°C unless otherwise noted)

Type ± 5% Tol.	Zener Voltage range <sup>(1)</sup> at I <sub>ZT1</sub> V <sub>Z</sub> (V)		Test Current I <sub>ZT1</sub> (mA)
	min.	max.	
AZ23-C2V7	2.50	2.90	5
AZ23-C3	2.80	3.20	5
AZ23-C3V3	3.10	3.50	5
AZ23-C3V6	3.40	3.80	5
AZ23-C3V9	3.70	4.10	5
AZ23-C4V3	4.00	4.60	5
AZ23-C4V7	4.40	5.00	5
AZ23-C5V1	4.80	5.40	5
AZ23-C5V6	5.20	6.00	5
AZ23-C6V2	5.80	6.60	5
AZ23-C6V8	6.40	7.20	5
AZ23-C7V5	7.00	7.90	5
AZ23-C8V2	7.70	8.70	5
AZ23-C9V1	8.50	9.60	5
AZ23-C10	9.4	10.6	5
AZ23-C11	10.4	11.6	5
AZ23-C12	11.4	12.7	5
AZ23-C13	12.4	14.1	5
AZ23-C15	13.8	15.6	5
AZ23-C16	15.3	17.1	5
AZ23-C18	16.8	19.1	5
AZ23-C20	18.8	21.2	5
AZ23-C22	20.8	23.3	5
AZ23-C24	22.8	25.6	5
AZ23-C27	25.1	28.9	5
AZ23-C30	28.0	32.0	5
AZ23-C33	31.0	35.0	5
AZ23-C36	34.0	38.0	5
AZ23-C39	37.0	41.0	5
AZ23-C43	40.0	46.0	5
AZ23-C47	44.0	50.0	5
AZ23-C51	48.0	54.0	5


Type ± 2% Tol.	Zener Voltage range <sup>(1)</sup> at I <sub>ZT1</sub> V <sub>Z</sub> (V)		Test Current I <sub>ZT1</sub> (mA)
	min.	max.	
AZ23-B2V7	2.65	2.75	5
AZ23-B3	2.94	3.06	5
AZ23-B3V3	3.23	3.37	5
AZ23-B3V6	3.53	3.67	5
AZ23-B3V9	3.82	3.98	5
AZ23-B4V3	4.21	4.39	5
AZ23-B4V7	4.61	4.79	5
AZ23-B5V1	5.00	5.20	5
AZ23-B5V6	5.49	5.71	5
AZ23-B6V2	6.08	6.32	5
AZ23-B6V8	6.66	6.94	5
AZ23-B7V5	7.35	7.65	5
AZ23-B8V2	8.04	8.36	5
AZ23-B9V1	8.92	9.28	5
AZ23-B10	9.80	10.2	5
AZ23-B11	10.8	11.2	5
AZ23-B12	11.8	12.2	5
AZ23-B13	12.7	13.3	5
AZ23-B15	14.7	15.3	5
AZ23-B16	15.7	16.3	5
AZ23-B18	17.6	18.4	5
AZ23-B20	19.6	20.4	5
AZ23-B22	21.6	22.4	5
AZ23-B24	23.5	24.5	5
AZ23-B27	26.5	27.5	5
AZ23-B30	29.4	30.6	5
AZ23-B33	32.3	33.7	5
AZ23-B36	35.3	36.7	5
AZ23-B39	38.2	39.8	5
AZ23-B43	42.1	43.9	5
AZ23-B47	46.1	47.9	5
AZ23-B51	50.0	52.0	5

**Notes:** (1) Measured with pulses t<sub>p</sub> = 5 ms

## Ratings and Characteristic Curves ( $T_A = 25^\circ\text{C}$ unless otherwise noted)


### Breakdown characteristics

$T_J = \text{constant (pulsed)}$

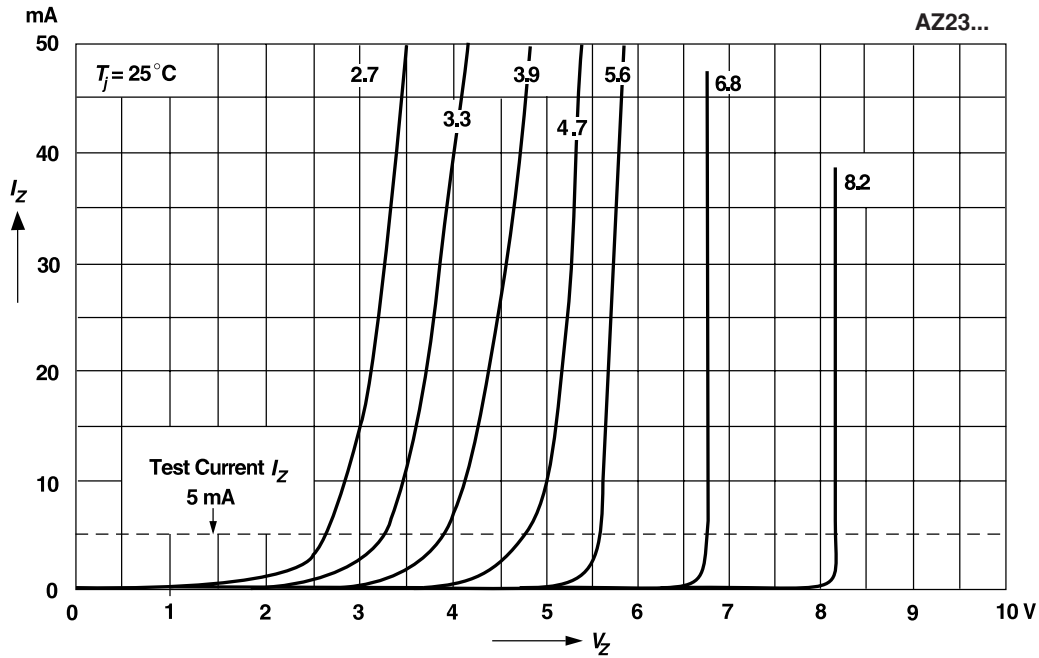

### Breakdown characteristics

$T_J = \text{constant (pulsed)}$

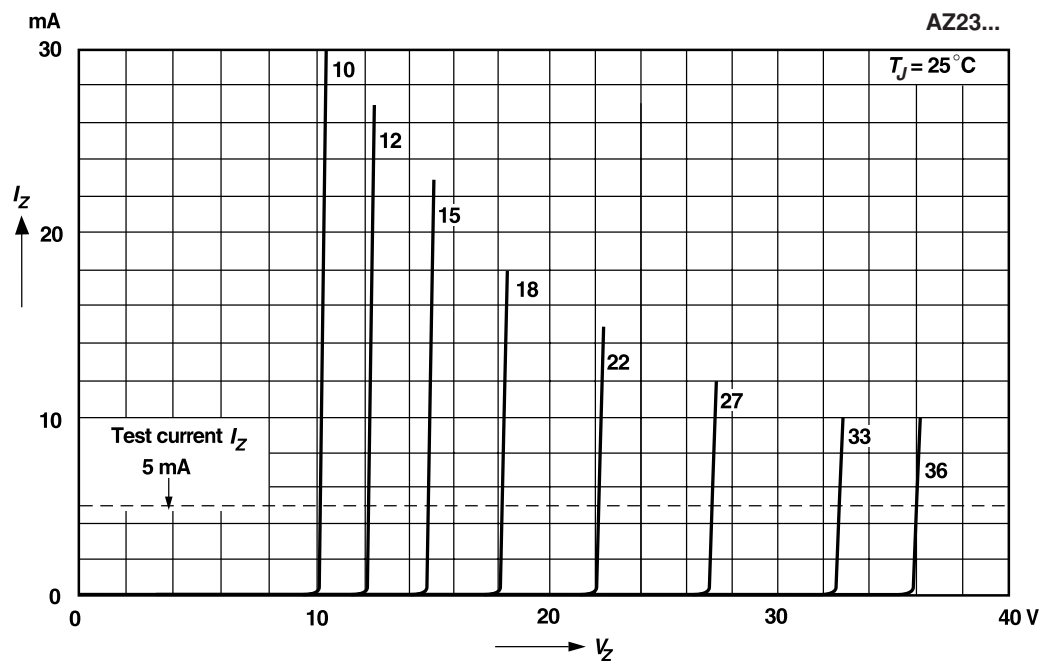





**Ratings and Characteristic Curves** ( $T_A = 25^\circ\text{C}$  unless otherwise noted)

**Breakdown characteristics**

$T_j = \text{constant (pulsed)}$

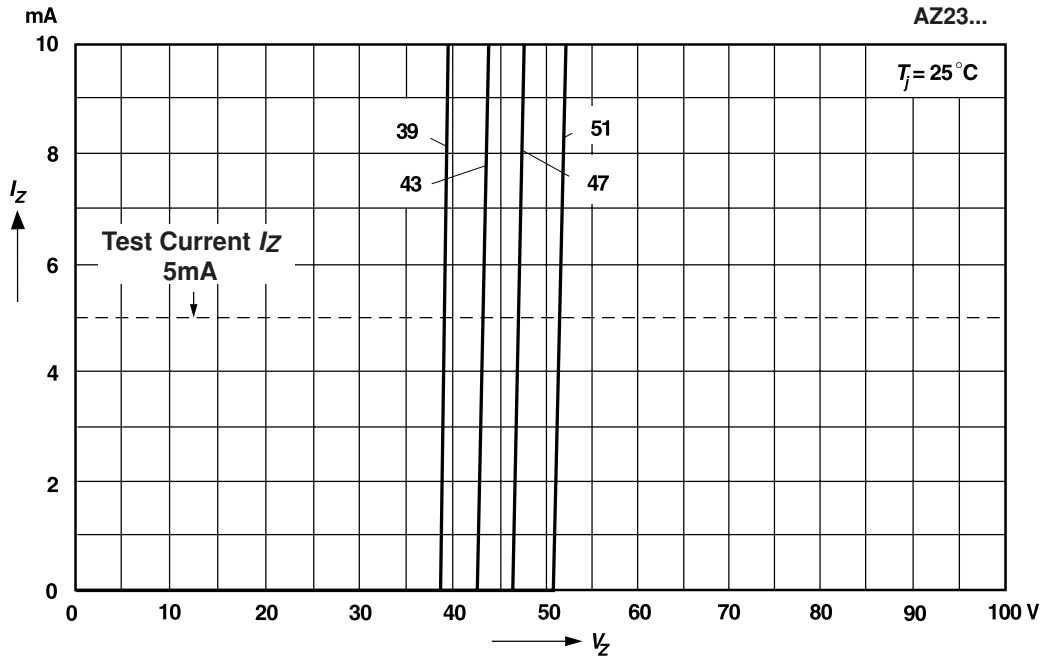


**Forward characteristics**

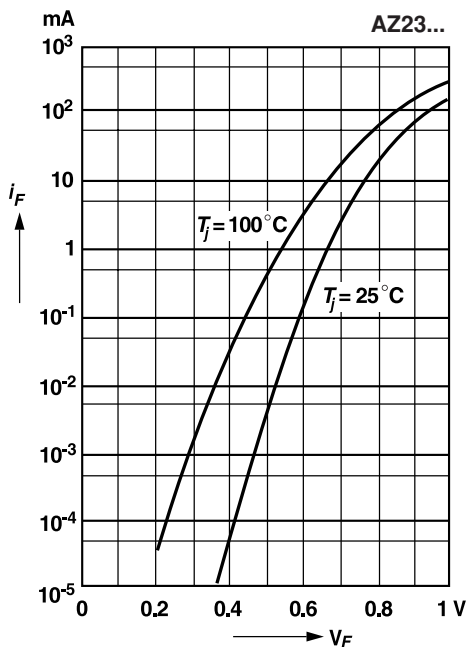

**Admissible power dissipation versus ambient temperature**


For conditions, see footnote in table "Absolute Maximum Ratings" AZ23...

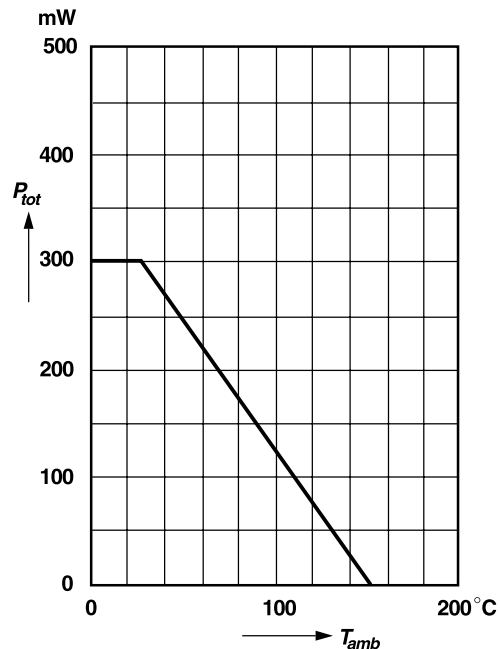


## Ratings and Characteristic Curves ( $T_A = 25^\circ\text{C}$ unless otherwise noted)

**Pulse thermal resistance versus pulse duration**


For conditions, see footnote in table "Absolute Maximum Ratings"

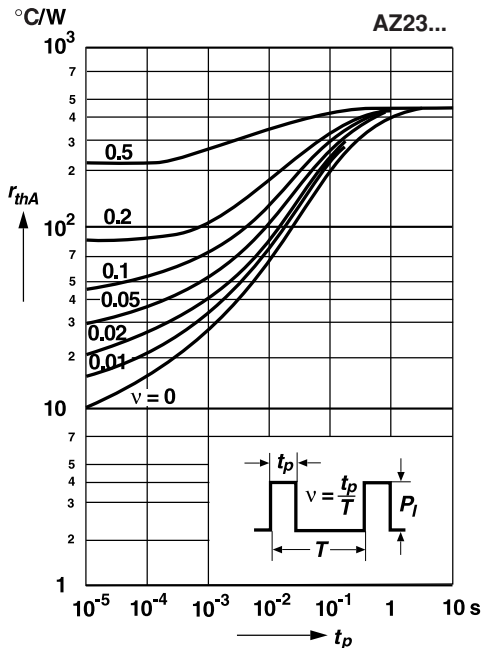


**Dynamic resistance versus Zener current**

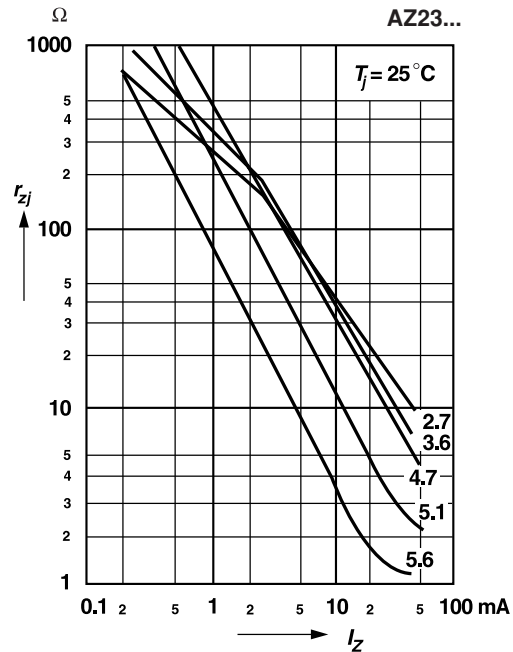

**Capacitance versus Zener voltage**

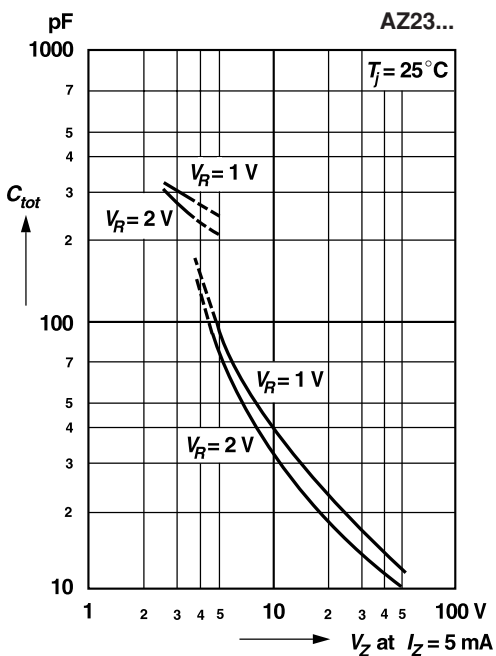


**Dynamic resistance versus Zener current**

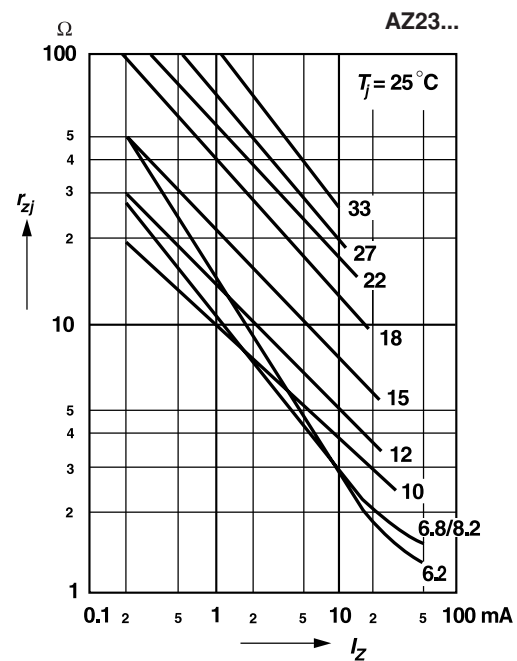


## Ratings and Characteristic Curves ( $T_A = 25^\circ\text{C}$ unless otherwise noted)

**Dynamic resistance versus Zener current**

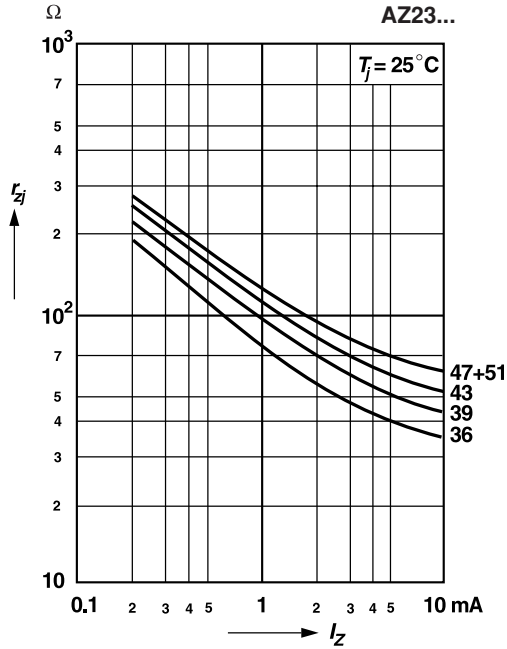


**Thermal differential resistance versus Zener voltage**


For conditions, see footnote in table "Absolute Maximum Ratings"

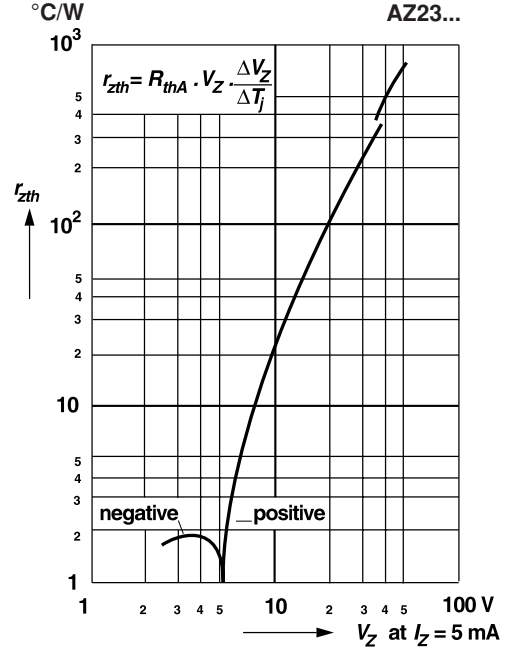

**Dynamic resistance versus Zener voltage**

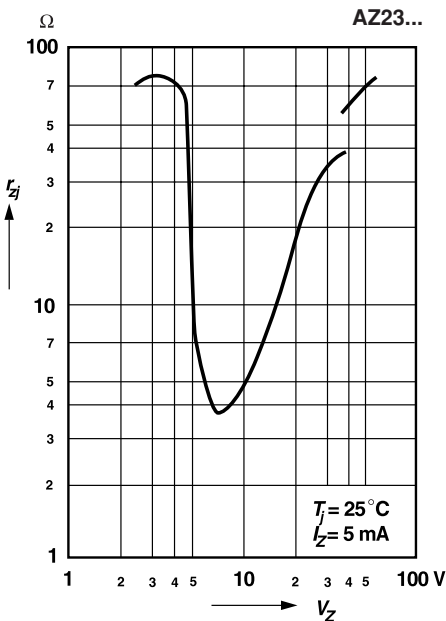


**Temperature dependence of Zener voltage versus Zener voltage**

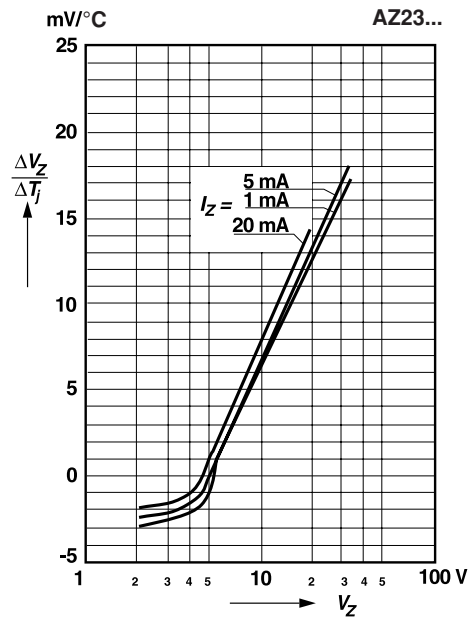


## Ratings and Characteristic Curves ( $T_A = 25^\circ\text{C}$ unless otherwise noted)


Change of Zener voltage versus junction temperature

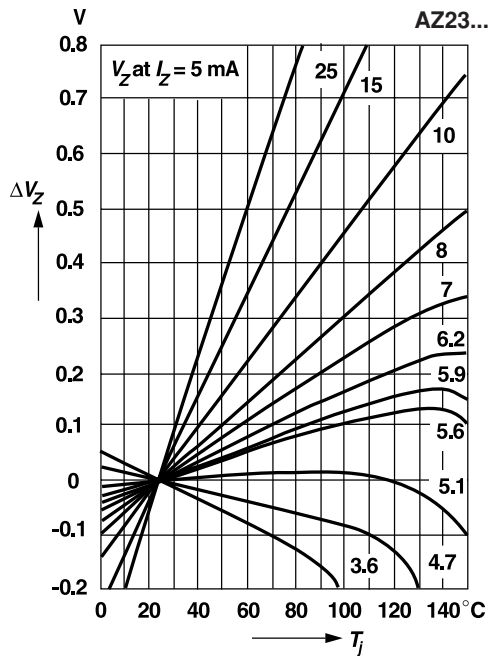


Temperature dependence of Zener voltage versus Zener voltage

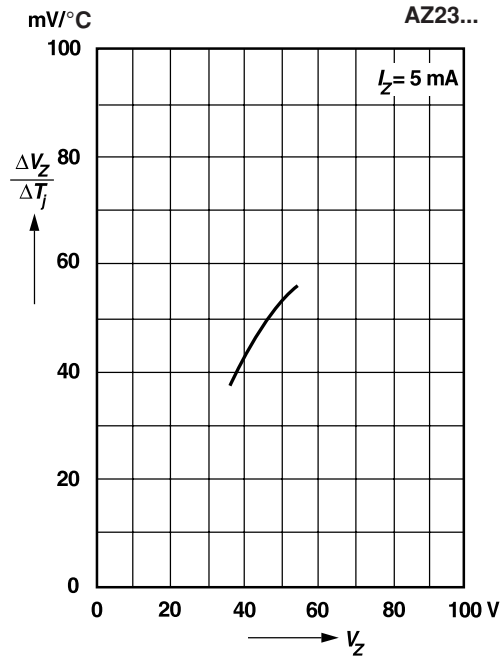

Change of Zener voltage versus junction temperature

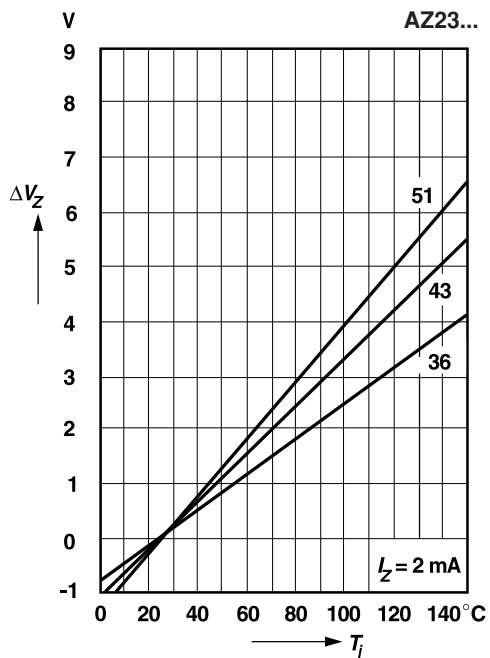


Change of Zener voltage from turn-on up to the point of thermal equilibrium versus Zener voltage

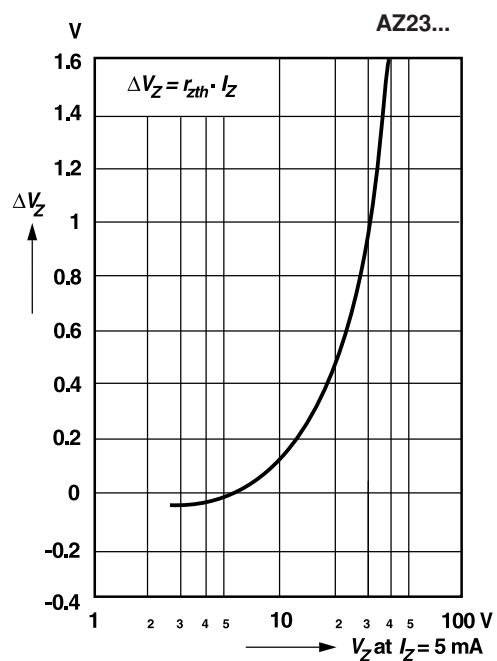




## Ratings and Characteristic Curves (T<sub>A</sub> = 25°C unless otherwise noted)

Change of Zener voltage from turn-on up to the point of thermal equilibrium versus Zener voltage

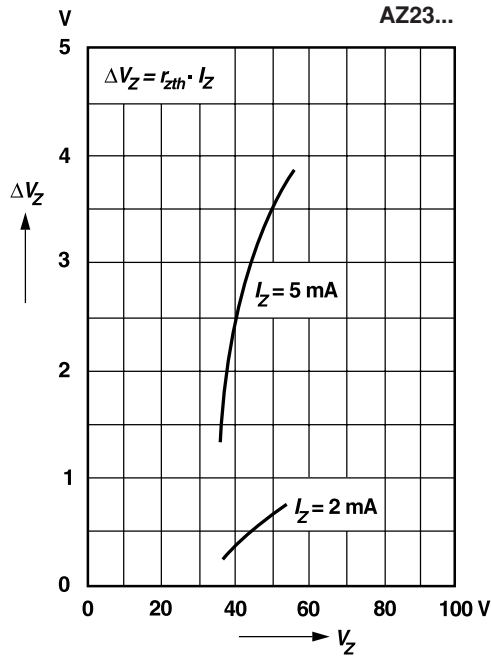

### Layout for R<sub>θJA</sub> test

Thickness: Fiberglass 0.059 in. (1.5mm)  
Copper leads 0.012 in. (0.3mm)

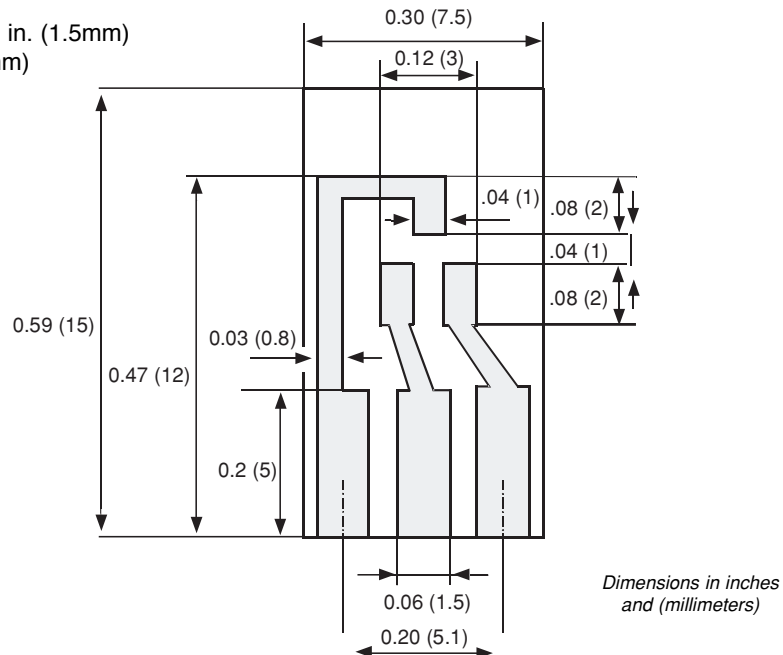



## Disclaimer

All product specifications and data are subject to change without notice.

Vishay Intertechnology, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained herein or in any other disclosure relating to any product.

Vishay disclaims any and all liability arising out of the use or application of any product described herein or of any information provided herein to the maximum extent permitted by law. The product specifications do not expand or otherwise modify Vishay's terms and conditions of purchase, including but not limited to the warranty expressed therein, which apply to these products.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications unless otherwise expressly indicated. Customers using or selling Vishay products not expressly indicated for use in such applications do so entirely at their own risk and agree to fully indemnify Vishay for any damages arising or resulting from such use or sale. Please contact authorized Vishay personnel to obtain written terms and conditions regarding products designed for such applications.

Product names and markings noted herein may be trademarks of their respective owners.