


# Alchip<sup>®</sup>-MFZ/MFX Series


- Manganese dioxide is employed as electrolyte
- For digital equipment
- High heat reflow capability
- Solvent-proof type (see PRECAUTIONS AND GUIDELINES)



## ◆SPECIFICATIONS

Items	Characteristics	
Category		
Temperature Range	-55 to +105°C	
Rated Voltage Range	4 to 20V <sub>dc</sub> ±20% of the initial value (For the maximum operating voltage at 105°C, see STANDARD RATINGS)	
Capacitance Tolerance	±20% (M) (at 20°C, 120Hz)	
Surge Voltage	105°C : (value at 105°C in STANDARD RATINGS) × 1.15 85°C and below : Rated voltage × 1.15 (V)	
Leakage Current	I=0.1CV Where, I : Max. leakage current (μA), C : Nominal capacitance (μF), V : Rated voltage (V)	(at 20°C after 2 minutes)
Dissipation Factor (tanδ)	0.12max. (at 20°C, 120Hz)	
Low Temperature Characteristics	Z(-25°C)/Z(+20°C)≤1.5 Z(-55°C)/Z(+20°C)≤2.0 (at 500kHz)	
Endurance	The following specifications shall be satisfied after the capacitors are subjected to DC voltage at 85°C or 105°C for 1000 hours with the specified rated ripple current applied.	
	Appearance	No significant damage
	Capacitance change	≤±10% of the initial value
	D.F. (tanδ)	≤150% of the initial specified value
	ESR	≤150% of the initial specified value
	Leakage current	≤The initial specified value
Bias Humidity	The following specifications shall be satisfied when the capacitors are restored to 20°C after subjecting them to the DC rated voltage at 60°C, 90 to 95% RH for 500 hours.	
	Appearance	No significant damage
	Capacitance change	≤±10% of the initial value
	D.F. (tanδ)	≤150% of the initial specified value
	ESR	≤150% of the initial specified value
	Leakage current	≤The initial specified value
Surge Voltage Test	The capacitors shall be subjected to 1000 cycles to charge the surge voltage specified at 85°C or 105°C for 30 seconds through a protective resistor (R=1kΩ), then discharge for 5-1/2 minutes through a resistor with the same value.	
	Appearance	No significant damage
	Capacitance change	≤±5% of the initial value
	D.F. (tanδ)	≤The initial specified value
	ESR	≤150% of the initial specified value
	Leakage current	≤The initial specified value
Reverse Voltage	The capacitors shall be subjected to 15% of the rated voltage at 85°C, or 15% of the maximum operating voltage at 105°C, in the reverse polarity direction for 125 hours, and shall be subjected to the rated voltage at 85°C, or the maximum operating voltage at 105°C, in the forward polarity direction for 125 hours.	
	Appearance	No significant damage
	Capacitance change	≤±10% of the initial value
	D.F. (tanδ)	≤The initial specified value
	ESR	≤The initial specified value
	Leakage current	≤The initial specified value
Thermal Shock	After the capacitors are subjected to -55°C, for 30 minutes and +125°C for 30 minutes for 5 cycles, they shall be conducted in accordance with the endurance test or the bias humidity test specified above.	
Failure Rate	1% per 1000 hours maximum (Confidence level 60% at 105°C)	
Others	IEC 384-18-1 (Fixed Aluminum Electrolytic Chip Capacitors with Solid Electrolyte)	

## ◆DIMENSIONS (Terminal Type=FD) [mm]

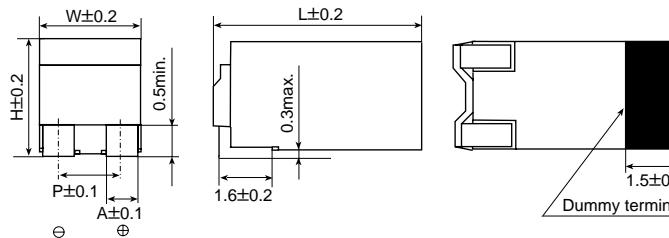

Case code	L	W	H	P	A
D6	6.4	4.6	4.6	3.3	1.1
E8	8.4	5.7	5.7	4.0	1.5

## ◆PART NUMBERING SYSTEM

MFZ 16 FD 15 M E8

Case code	Capacitance	Code
Cap tolerance (±20%)	6.8μF	6R8
Nominal cap code	10μF	10
Terminal type (FD)	33μF	33

85°C rated voltage in volts  
Series name

**Alchip®-MFZ/MFX Series**
**◆STANDARD RATINGS**
**MFZ**

Case code	Rated voltage (V <sub>dc</sub> )	Cap (μF)	ESR (mΩ) [20°C/500kHz]	Temp. (°C)	Max operating voltage (V <sub>dc</sub> )	Rated ripple (mArms)			Case code	Rated voltage (V <sub>dc</sub> )	Cap (μF)	ESR (mΩ) [20°C/500kHz]	Temp. (°C)	Max operating voltage (V <sub>dc</sub> )	Rated ripple (mArms)			
						500kHz	300kHz	100kHz							500kHz	300kHz	100kHz	
<b>D6</b>	4	27	270	105	3.2	320	300	270	<b>E8</b>	4	56	180	105	3.2	390	370	350	
					85	4	500	480						85	4	580	550	530
					60	4	570	540						60	4	700	660	630
					45	4	660	630						45	4	810	770	740
	6.3	22	270	105	5	320	300	270		6.3	47	180	105	5	390	370	350	
					85	6.3	500	480						85	6.3	580	550	530
					60	6.3	570	540						60	6.3	700	660	630
					45	6.3	660	630						45	6.3	810	770	740
	10	15	270	105	8	320	300	270		10	33	180	105	8	390	370	350	
					85	10	500	480						85	10	580	550	530
					60	10	570	540						60	10	700	660	630
					45	10	660	630						45	10	810	770	740
	16	6.8	425	105	13	130	110	100		16	15	270	105	13	320	300	270	
					85	16	190	170						85	16	500	480	440
					60	16	220	200						60	16	570	540	490
					45	16	250	230						45	16	660	630	570
					20	3.3	270	105		16	320	300	270					
										85	20	500	480	440				
										60	20	570	540	490				
										45	20	660	630	570				

**MFX**

Case code	Rated voltage (V <sub>dc</sub> )	Cap (μF)	ESR (mΩ) [20°C/500kHz]	Temp. (°C)	Max operating voltage (V <sub>dc</sub> )	Rated ripple (mAarms)			Case code	Rated voltage (V <sub>dc</sub> )	Cap (μF)	ESR (mΩ) [20°C/500kHz]	Temp. (°C)	Max operating voltage (V <sub>dc</sub> )	Rated ripple (mAarms)			
						500kHz	300kHz	100kHz							500kHz	300kHz	100kHz	
<b>D6</b>	4	22	270	105	3.2	320	300	270	<b>E8</b>	4	47	180	105	3.2	390	370	350	
					85	4	500	480						85	4	580	550	530
					60	4	570	540						60	4	700	660	630
					45	4	660	630						45	4	810	770	740
	6.3	15	270	105	5	320	300	270		6.3	33	180	105	5	390	370	350	
					85	6.3	500	480						85	6.3	580	550	530
					60	6.3	570	540						60	6.3	700	660	630
					45	6.3	660	630						45	6.3	810	770	740
	10	10	270	105	8	320	300	270		10	22	180	105	8	390	370	350	
					85	10	500	480						85	10	580	550	530
					60	10	570	540						60	10	700	660	630
					45	10	660	630						45	10	810	770	740
	16	4.7	425	105	13	130	110	100		16	10	270	105	13	320	300	270	
					85	16	190	170						85	16	500	480	440
					60	16	220	200						60	16	570	540	490
					45	16	250	230						45	16	660	630	570