

SE-K [For General]

105°C Single-Ended Lead Aluminum Electrolytic Capacitors Rated Voltage up to 450V

Miniature Size Aluminum Electrolytic Capacitors

ELECTRICAL CHARACTERISTICS

Operating Temperature : -40° ~ +105°C / -25° ~ +105°C

Working Voltage : 6.3 ~ 250V / 350 ~ 450V

Rate Capacitance Range : 0.47 ~ 15000μF / 0.47 ~ 150μF

Capacitance Tolerance : -20 ~ +20%

DC Leakage Current (μA) : $I = 0.01CV + 3 / 0.03CV + 10$

(After 2 Minutes Application of DC Working Voltage at 25°C)

Dissipation Factor : at 120 Hz, 25°C

WV (V):	6.3	10	16	25	35	50	63	80	100	160 ~ 250	350 ~ 450
D.F (%) :	26	22	18	16	14	12	10	10	10	15	20

For capacitor whose capacitance exceeds 1000 μF. The value of DF(%) is increased by 2% for every addition of 1000 μF.

Load Life : 1000 Hours at Assured with Full Rated Maximum Ripple Current Applied

(a) Capacitance Change : Within 20% of Initial Value

(b) Dissipation Factor : Not Exceed 200% of Initial Requirement

(c) Leakage Current : Not Exceed the Initial Requirement

Shelf Life : 500 Hours, No Voltage Applied

(a) Capacitance Change : Within 20% of Initial Value

(b) Dissipation Factor : Not Exceed 200% of Initial Requirement

(c) Leakage Current : Not Exceed 200% of Initial Requirement




RoHS
COMPLIANT

DIAGRAM OF DIMENSIONS

D _ø	F	d _ø
4.0	1.5	0.45
5.0	2.0	0.5
6.0	2.5	
8.0	3.5	
10.0	5.0	0.6
12.0		
13.0		
16.0	7.5	0.8
18.0		
22.0	10.0	0.8

Rubber Stand-off

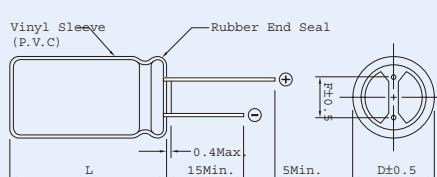

DESCRIPTION

Lower-cost capacitors expressly intended for high density printed circuit board.

Very High Volumetric Efficiency

Ideally suited for general-purpose applications, coupling, decoupling, by pass, and filtering circuit in entertainment electronics.

Feature High CV Product with Moderate Cost

Multiplier for Ripple Current


Frequency coefficient

Frequency (Hz)	120	300	1K	10K~100K
6.3~100V Below~68μF	1.00	1.20	1.30	1.45
6.3~100V 100~680μF	1.00	1.10	1.15	1.25
6.3~110V 1000~22000μF	1.00	1.05	1.10	1.15
160~450V ALL Cap(μF)	1.00	1.05	1.10	1.50

Temperature coefficient

Temperature(°C)	65	85	105
Factor	1.80	1.40	1.00

Dimensions : mm

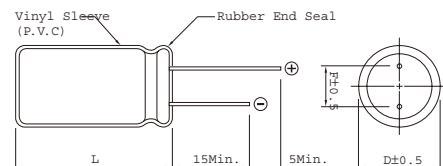



CASE SIZE & PERMISSIBLE RIPPLE CURRENT OF STANDARD PRODUCTS

CAP. (µF)	RATED VOLTAGE WV											
	6.3 Ripple		10 Ripple		16 Ripple		25 Ripple		35 Ripple		50 Ripple	
Size	Size	Size	Size	Size	Size	Size	Size	Size	Size	Size	Size	Size
0.1										5 x 11	3	
0.22										5 x 11	4	
0.33										5 x 11	5	
0.47										5 x 11	6	5 x 11
1.0										5 x 11	9	5 x 11
2.2										5 x 11	11	5 x 11
3.3										5 x 11	15	5 x 11
4.7							5 x 11	20	5 x 11	18	5 x 11	18
6.8							5 x 11	20	5 x 11	18	5 x 11	25
10		5 x 11	18	5 x 11	20	5 x 11	20	5 x 11	25	5 x 11	25	5 x 11
										8 x 11	54	
15				5 x 11	30	5 x 11	20	5 x 11	30	5 x 11	35	5 x 11
22		5 x 11	45	5 x 11	30	5 x 11	35	5 x 11	35	5 x 11	35	6.3 x 11
33		5 x 11	60	5 x 11	40	5 x 11	40	5 x 11	50	6.3 x 11	50	6.3 x 11
										8 x 11	50	8 x 11
47	5 x 11	60	5 x 11	45	5 x 11	50	5 x 11	50	5 x 11	65	6.3 x 11	70
									8 x 11	65		8 x 11
									6.3 x 11	65		
68	5 x 11	75	5 x 11	80	5 x 11	50	6.3 x 11	80	8 x 11	110	8 x 11	120
100	5 x 11	60	5 x 11	80	5 x 11	80	6.3 x 11	90	6.3 x 11	110	8 x 11	120
					6.3 x 11	80	8 x 11	90	8 x 11	110	10 x 12	120
					8 x 11	80					8 x 15	90
150	5 x 11	60	5 x 11	110	8 x 11	110	8 x 11	140	10 x 12	190	10 x 12	120
			6.3 x 11	130							10 x 12	10 x 15
220	5 x 11	100	6.3 x 11	110	6.3 x 11	140	8 x 11	140	8 x 11	190	10 x 12	240
	6.3 x 11	100			8 x 11	140	10 x 12	140	8 x 15	190	10 x 15	240
	8 x 11	100	8 x 11	110					10 x 12	190		10 x 19.5
330	6.3 x 11	120	6.3 x 11	160	8 x 11	180	8 x 11	140	8 x 15	220	10 x 15	320
	8 x 11	120	8 x 11	160					8 x 20	220	10 X 19.5	320
									10 x 12	260		13 X 20
									10 x 15	260		380
470	6.3 x 11	125	6.3 x 11	110	8 x 11	250	8 x 15	290	10 x 15	350	10 x 19.5	430
	8 x 11	170	8 x 11	170			8 x 15	250	10 x 12	290	13 x 20	430
							10 x 12	250	10 x 15	290		13 x 25
680	8 x 11	255	8 x 11	300	10 x 12	455	10 x 19.5	290	13 x 20	620	13 x 25	430
	10 x 12	320	8 x 15	300	10 x 15	530					13 x 25	500
		10 x 12	300		13 x 25	300					16 x 25	500
1000	8 x 11	300	8 x 11	300	8 x 20	300	10 x 19.5	540	13 x 20	620	13 x 25	790
	10 x 12	300	8 x 15	300	10 x 15	360	12 x 20	540	13 x 25	620	16 x 25	790
		10 x 12	300		10 x 19.5	360	13 x 20	540			16 x 25	900
1500	10 x 15	600	10 x 19.5	300	10 x 19.5	360	13 x 25	540	13 x 25	620	16 x 32	900
					13 x 20	700			16 x 25	620	16 x 36	900
2200	10 x 19.5	580	10 x 19.5	580	10 x 25	895	13 x 25	880	16 x 25	1030	16 x 36	1230
	13 x 20	580	13 x 20	580	12 x 25	1040	16 x 25	880	16 x 32	1030	18 x 36	1230
					13 x 20	620					18 x 36	1455
					13 x 25	620						
3300	10 x 19.5	670	10 x 25	550	13 x 25	970	13 x 25	1120	16 x 36	1320	18 x 36	1400
	13 x 20	670	10 x 30	550	16 x 25	970			16 x 36	1120	18 x 40	1400
		13 x 20	670		16 x 32	1120			18 x 36	1120		
4700	13 x 25	1320	13 x 25	1000	16 x 25	1240	16 x 32	1420	18 x 36	1540	22 x 35	1900
	16 x 25	1000	16 x 25	1000	16 x 32	1240	18 x 36	1440	18 x 40	1540	22 x 40	1780
6800	13 x 25	1120	16 x 25	1120	16 x 36	1530	18 x 36	1630	22 x 40	1880		
	16 x 25	1120	16 x 32	1120	16 x 40	1530	18 x 40	1630				
10000	16 x 25	1320	16 x 36	1320	18 x 36	1730	22 x 40	2000				
	16 x 32	1320	18 x 36	1320	18 x 40	1730						
15000	18 x 36	2280	18 x 40	1960							22 x 40	1730

Note : * I. D x L : mm

* 2 mA rms at 85°C, 120Hz



CASE SIZE & PERMISSIBLE RIPPLE CURRENT OF STANDARD PRODUCTS

CAP. (μF)	RATED VOLTAGE W/V											
	100		160		200		250		350		400	
	Size	Ripple	Size	Ripple	Size	Ripple	Size	Ripple	Size	Ripple	Size	Ripple
0.1	5 x 11	3										
0.22	5 x 11	4										
0.33	5 x 11	5										
0.47	5 x 11	6	5 x 11	8	5 x 11	6	5 x 11	6	5 x 11	14	6.3 x 11	14
					8 x 11	6	8 x 11	9			6.3 x 11	14
1.0	5 x 11	9	5 x 11	12	5 x 11	9	6.3 x 11	9	6.3 x 11	20	6.3 x 11	15
					8 x 11	9	8 x 11	9			8 x 11	20
											8 x 11	15
											10 x 15	15
2.2	5 x 11	15	6.3 x 11	15	6.3 x 11	15	6.3 x 11	15	8 x 11	35	8 x 11	20
			8 x 11	15	8 x 11	15	8 x 11	15			10 x 12	20
											8 x 11	15
											10 x 15	20
3.3	5 x 11	18	6.3 x 11	20	6.3 x 11	20	8 x 11	20	8 x 11	37	8 x 11	20
			8 x 11	20	8 x 11	20	10 x 12	20	10 x 12	47	10 x 12	25
											10 x 19.5	25
											10 x 19.5	35
	5 x 11	20	6.3 x 11	30	8 x 11	30	8 x 11	30	10 x 12	55	8 x 15	37
											8 x 11	37
4.7			8 x 11	30	10 x 12	30	10 x 12	30	10 x 15	55	10 x 12	47
									8 x 11	55	10 x 15	47
											13 x 20	77
											13 x 20	50
											16 x 25	47
6.8	5 x 11	35	10 x 12	30	10 x 12	45	8 x 15	45	10 x 15	65	10 x 15	70
							10 x 12	45			10 x 19	70
	5 x 11	35	8 x 11	40	10 x 12	45	10 x 15	45	10 x 15	95	10 x 15	70
10	6.3 x 11	35	10 x 12	40	10 x 15	45	10 x 19.5	45			10 x 19.5	70
											13 x 20	70
											13 x 20	75
15	8 x 11	35	10 x 15	40	10 x 15	45	10 x 15	80	10 x 19.5	140	10 x 19	100
											13 x 20	110
											13 x 25	110
22	8 x 11	65	8 x 20	70	10 x 15	70	10 x 19.5	80	13 x 20	165	13 x 20	110
											13 x 25	110
											16 x 32	110
33	8 x 11	95	10 x 19.5	110	10 x 19.5	110	13 x 20	100	13 x 25	195	13 x 25	180
	10 x 12	95	13 x 20	110	13 x 25	110	13 x 25	100			16 x 20	180
											16 x 25	180
											16 x 20	170
47	10 x 12	120	13 x 20	140	13 x 20	140	13 x 25	140	16 x 25	340	16 x 25	250
	10 x 15	120	13 x 25	140	13 x 25	140	16 x 25				16 x 32	250
											16 x 36	250
68	10 x 15	220	13 x 25	250	13 x 25	140	16 x 25	140	16 x 32	320	16 x 32	320
											16 x 36	320
											18 x 25	320
											18 x 36	320
											18 x 40	330
100	10 x 19	220	13 x 25	250	13 x 25	335	16 x 32	260	18 x 36	360	16 x 36	425
											18 x 32	430
											18 x 36	480
120											18 x 36	480
150	13 x 20	414	16 x 32	250	16 x 36	450	18 x 40	460	22 x 40	480	22 x 40	450
	13 x 25	414										
220	13 x 25	420	16 x 32	430	18 x 32	515	22 x 40	525				
			16 x 36	430	18 x 36	515						
					18 x 40	515						
330	13 x 25	510	18 x 36	850	18 x 36	705						
	16 x 25	510	18 x 40	850	18 x 40	780						
					22 x 40	920						
470	16 x 25	680	22 x 40	980								
	16 x 32	680										
680	16 x 36	1200										
1000	18 x 40	1340										
	22 x 40	1500										

Note : * I. D x L : mm

* 2. mA rms at 105°C, 120Hz