

Connectorized Amplifier

ZX60-2531M+

50Ω 0.5 to 2.5 GHz

Features

- From 2.8V to 5V operation
- High directivity, 30 dB typ.
- Wide bandwidth, 0.5 to 2.5 GHz
- Low noise figure, 3.5 dB typ.
- Output power, up to 18.2 dBm typ.
- Protected by US patent 6,790,049

Applications

- Buffer amplifier
- Cellular
- PCN
- Lab
- Instrumentation
- Test equipment



CASE STYLE: GA955

Connectors	Model	Price	Qty.
SMA	ZX60-2531M-S+	\$64.95 ea.	(1-9)

+ RoHS compliant in accordance with EU Directive (2002/95/EC)

The +Suffix has been added in order to identify RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications.

Electrical Specifications at $T_{AMB} = 25^{\circ}\text{C}$

MODEL NO.	FREQ. (GHz) $f_L - f_U$	DC VOLTAGE @ Pin V+ (V)	GAIN over frequency in GHz Typ (dB)						MAXIMUM POWER Output (dBm) (1 dB Comp.) Typ. f_L f_U		DYNAMIC RANGE			VSWR (:1) Typ.		ACTIVE DIRECTIVITY (dB) Isolation-Gain Typ.	DC OPERATING CURRENT @ Pin V+ (mA) Typ. Max.	
			0.5	1.0	1.5	2.0	2.5	Min.at 2 GHz	NF (dB) Typ.	IP3 (dBm) Typ.	1GHz	1GHz	2GHz	In	Out		Typ.	Typ.
ZX60-2531M+	0.5-2.5	5.0*	30.3	38.0	37.4	35.5	32.8	31.0	18.2	16.1	3.5	28.4	26.1	1.3	1.6	30	102	130


*DC Voltage@Pin V+ can also be 2.8V

Maximum Ratings

Operating Temperature	-40°C to 80°C case
Storage Temperature	-55°C to 100°C
DC Voltage	7V
Input Power (no damage)	-15dBm
Power	700mW

Permanent damage may occur if any of these limits are exceeded.

Outline Drawing

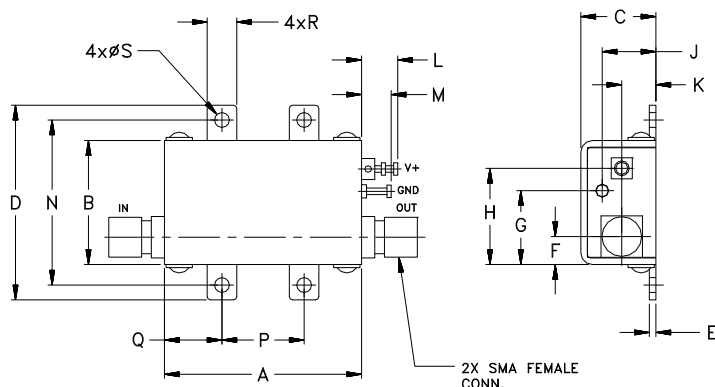

Outline Dimensions (inch mm)

A	B	C	D	E	F	G	H	J	K	L	M	N	P	Q	R	S	wt.
1.20	.75	.46	1.18	.04	.17	.45	.59	.33	.21	.22	.18	1.00	.50	.35	.18	.106	grams
30.48	19.05	11.68	29.97	1.02	4.32	11.43	14.99	8.38	5.33	5.59	4.57	25.40	12.70	8.89	4.57	2.69	35.0



For detailed performance specs & shopping online see web site

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661 The Design Engineers Search Engine Provides ACTUAL Data Instantly at minicircuits.com

Notes: 1. Performance and quality attributes and conditions not expressly stated in this specification sheet are intended to be excluded and do not form a part of this specification sheet. 2. Electrical specifications and performance data contained herein are based on Mini-Circuit's applicable established test performance criteria and measurement instructions. 3. The parts covered by this specification sheet are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp.

REV. C
M111067
EDR-6057/2
ZX60-2531M+
RAV/JRJ
110526
Page 1 of 3

Typical Performance Data at 25°C

ZX60-2531M+

V+ = 5.0V

FREQUENCY (MHz)	GAIN (dB)	DIRECTIVITY (dB)	VSWR IN (:1)	VSWR OUT (:1)	POWER OUT @1dB COMPRESSION (dBm)	IP3 (dBm)	NF (dB)
500	30.42	58.99	2.10	3.13	18.53	28.97	3.69
650	34.57	41.15	2.04	2.14	19.76	30.57	3.53
700	35.40	40.35	1.99	1.91	19.70	30.65	3.56
750	36.08	36.46	1.92	1.76	19.60	30.59	3.54
800	36.64	33.60	1.83	1.63	19.49	30.42	3.56
1000	37.92	29.50	1.65	1.42	18.34	29.24	3.61
1210	38.18	26.55	1.68	1.33	17.67	28.10	3.66
1500	37.30	25.92	1.50	1.42	17.27	27.58	3.64
1680	36.69	25.65	1.46	1.20	16.94	27.66	3.59
1780	36.41	24.84	1.42	1.20	16.73	27.68	3.64
1880	36.15	25.00	1.36	1.28	16.54	27.64	3.70
2000	35.84	24.28	1.26	1.32	16.36	27.45	3.75
2050	35.75	23.86	1.21	1.34	16.21	27.33	3.81
2100	35.58	24.00	1.17	1.40	16.25	27.18	3.81
2150	35.29	23.98	1.12	1.40	16.10	27.02	3.84
2200	35.16	23.52	1.06	1.48	16.18	26.84	3.82
2300	34.55	23.52	1.10	1.55	16.16	26.53	3.87
2400	33.65	23.81	1.24	1.62	16.31	26.39	3.87
2450	32.62	24.84	1.29	1.68	16.30	26.44	3.91
2500	32.50	24.73	1.39	1.69	16.37	26.62	3.95

V+ = 2.8V

FREQUENCY (MHz)	GAIN (dB)	DIRECTIVITY (dB)	VSWR IN (:1)	VSWR OUT (:1)	POWER OUT @1dB COMPRESSION (dBm)	IP3 (dBm)	NF (dB)
500	28.36	62.18	2.17	3.38	14.21	24.17	3.76
650	32.12	43.07	2.03	2.34	15.23	25.65	3.62
700	32.89	39.27	1.97	2.14	15.31	25.80	3.59
750	33.47	37.14	1.91	1.99	15.33	25.84	3.64
800	33.95	35.03	1.83	1.90	15.33	25.79	3.65
1000	34.96	30.63	1.69	1.75	14.74	25.15	3.67
1210	35.03	27.96	1.69	1.73	14.64	24.41	3.71
1500	34.25	26.71	1.66	1.65	14.67	24.01	3.69
1680	33.86	27.07	1.50	1.59	14.39	24.02	3.69
1780	33.66	26.25	1.43	1.54	14.30	24.01	3.70
1880	33.48	26.31	1.37	1.53	14.07	23.96	3.76
2000	33.28	25.82	1.24	1.55	14.01	23.81	3.82
2050	33.30	25.39	1.21	1.58	13.81	23.71	3.88
2100	33.17	24.92	1.16	1.64	13.81	23.60	3.84
2150	32.95	25.70	1.10	1.66	13.79	23.48	3.92
2200	32.88	25.33	1.07	1.71	13.37	23.35	3.91
2300	32.40	25.04	1.11	1.82	13.82	23.11	3.88
2400	31.60	25.39	1.23	1.99	13.93	22.98	3.97
2450	30.47	26.29	1.30	2.10	14.05	23.00	3.92
2500	30.51	26.26	1.38	2.18	14.02	23.10	3.95



For detailed performance specs & shopping online see web site

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661 The Design Engineers Search Engine Provides ACTUAL Data Instantly at minicircuits.com

IF/RF MICROWAVE COMPONENTS

Notes: 1. Performance and quality attributes and conditions not expressly stated in this specification sheet are intended to be excluded and do not form a part of this specification sheet. 2. Electrical specifications and performance data contained herein are based on Mini-Circuit's applicable established test performance criteria and measurement instructions. 3. The parts covered by this specification sheet are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp.

Typical Performance Curves at 25 °C

ZX60-2531M+

