


DIP Socket Series

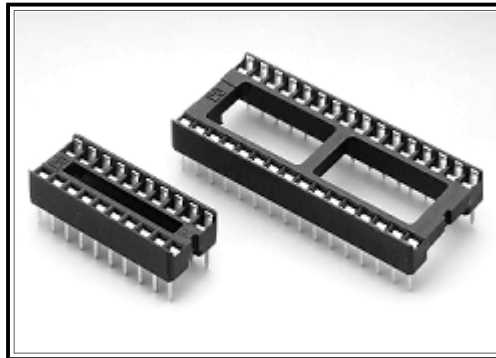

DIP

Contents:

- [Key Features](#)
- [Materials/Finishes](#)
- [Specifications](#)
- [Order Information](#)

Key Features

FEATURES

- **Insertion Force:** Low Insertion Force
- **Frame Style:** Open Frame
- **Applied to Chip Width:** 0.4", 0.6" Chip Width
- **Package:** Tube

[Back to Top](#)

Materials/Finishes

MATERIALS/FINISHES

CONTACT

Phosphor Bronze Alloy, Hot Tin Dip, 60 u" Thickness.

HOUSING

Thermoplastic PBT, UL 94V-0

[Back to Top](#)

Specifications


SPECIFICATION
<p>ELECTRICAL CHARACTERISTICS</p> <p>Low Level Contact Resistance: 20 mΩ</p> <p>Dielectric Withstanding Voltage: 1000 VAC RMS MIN.</p> <p>Insulation Resistance: 1000 MΩ MIN.</p> <p>Contact Current Rating: 1 AMP</p> <p>MECHANICAL CHARACTERISTICS</p> <p>Durability: 30 CYCLES</p> <p>Operation Temperature: -55 °C TO +105 °C</p> <p>Insertion Force: 0.75 LBS(340 Grams) Max. per Contact</p> <p>Withdrawal Force: 0.044LBS(20 Grams) Min. per Contact</p>

[Back to Top](#)

Order Information

ORDER INFORMATION	
<p>OPEN FRAME CONSTRUCTION PITCH = 2.54mm</p> <p>TERMINATION TYPE DIP, THROUGH HOLE TYPE</p> <p>NO. OF CONTACT POSITION 12 = 24 POS. (12 POS. ×2 SIDES) 14 = 28 POS. (14 POS. ×2 SIDES) 16 = 32 POS. (16 POS. ×2 SIDES)</p> <p>CONTACT AREA PLATING 0 = TIN PLATING</p>	<p style="text-align: center; font-weight: bold;">P A 0 1 <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> - <input type="checkbox"/> <input type="checkbox"/> - <input type="checkbox"/></p> <p>MATERIAL/COLOR NONE -T = PBT, BLACK</p> <p>EXTENSION CODE NONE A0 = BODY WIDTH IS .400"(10.16mm) B0 = WITHOUT MIDDLE BAR</p>

[Back to Top](#)


 Sales: wesley@foxconn.com
 Copyright 1997 Foxconn. All rights reserved.

Last modified: 1997/11/18 02:30:32 PM