


## SSB-LX1515 SERIES

## 15x15mm (4) Chip Light Bars

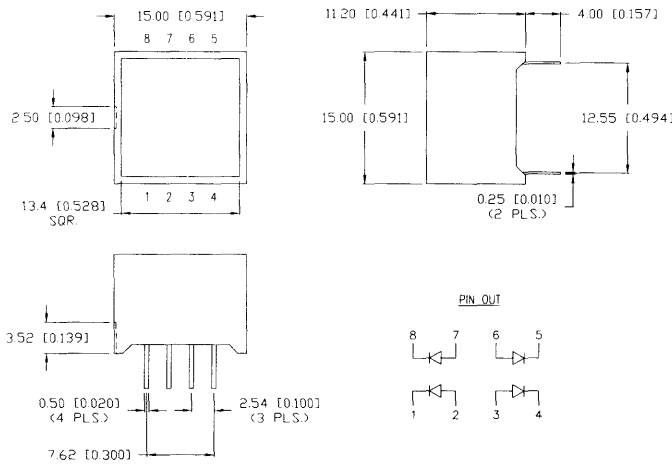

### FEATURES / OPTIONS

- State-of-the-Art, High Intensity Chip Technology
- Pre-Sorted Chips for Color & Industry Uniformity
- High Light Reflectivity/Low Cross-Talk Reflectors
- Advanced Chip on Board Technology
- Choice of Colors and Color Combinations
- Custom Designs, Easily Developed, Low Minimum

### APPLICATIONS / USES

- Backlighting Legends or Switches
- Large PCB Installed Indicators
- Keyboard Status Indicators
- Medical Diagnostics Equipment
- Industrial Automation Controls
- Control Panel Indicators

Lumex Part Number	Dice Material	Emitted Color	Peak (nm)	Epoxy Lens	Vf @ 20mA		Brightness		View Angle° 2x THETA
					TYP..	Max.	TYP. mcd	@ mA	
SSB-LX1515SID	AllnGaP	Super High Intensity Red	636	Red Diffused	2.0	2.6	160	20	160
SSB-LX1515SIW	AllnGaP	Super High Intensity Red	636	White Diffused	2.0	2.6	160	20	160
SSB-LX1515SOD	AllnGaP	Super Orange	610	Orange Diffused	2.0	2.6	150	20	160
SSB-LX1515SOW	AllnGaP	Super Orange	610	White Diffused	2.0	2.6	150	20	160
SSB-LX1515SPGD	AllnGaP	Super Pure Green	562	Green Diffused	2.2	2.6	120	20	160
SSB-LX1515SPGW	AllnGaP	Super Pure Green	562	White Diffused	2.2	2.6	120	20	160
SSB-LX1515SYD	AllnGaP	Super Yellow	590	Yellow Diffused	2.0	2.6	160	20	160
SSB-LX1515SYW	AllnGaP	Super Yellow	590	White Diffused	2.0	2.6	160	20	160



1-800-278-5666 USA  
+886-3-5821124 Asian Pacific



www.lumex.com  
www.lumex.com.tw



1-800-944-2790 USA  
+886-3-5821154 Asian Pacific