
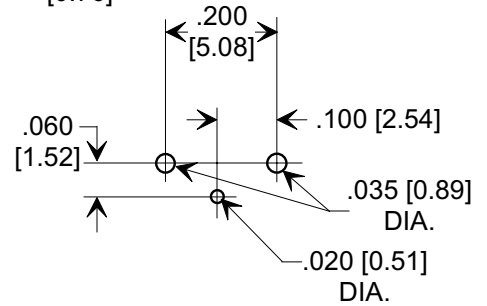
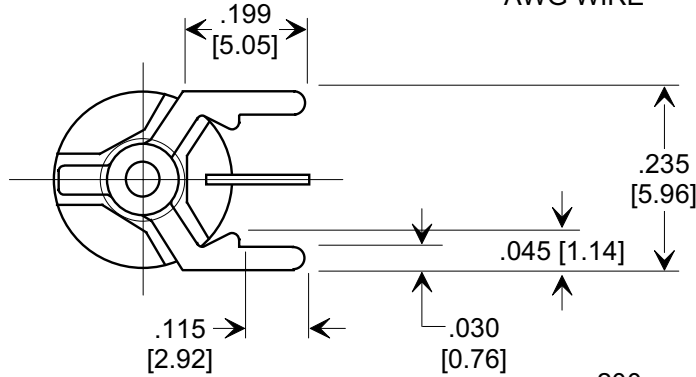
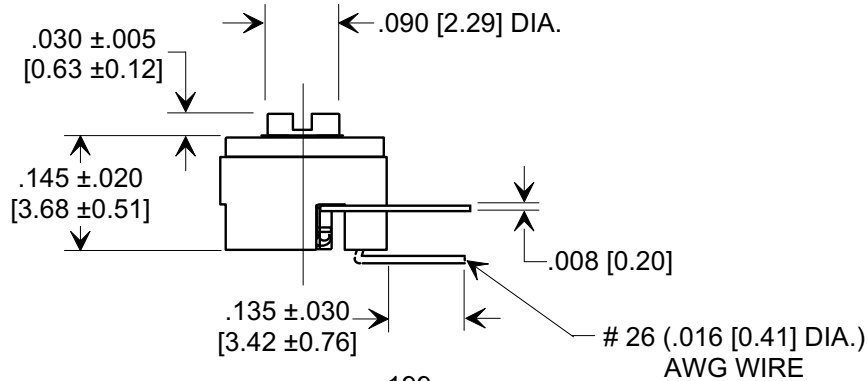
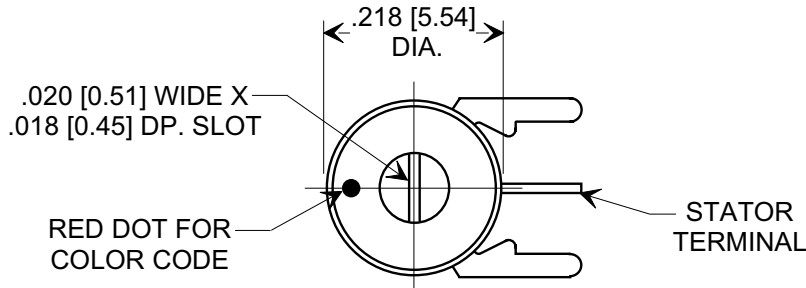



Electrical Testing  
per Tusonix standard  
test plans and Mil-Std-202  
Test Methods.

**MARKETING SALES DRAWING**  
**DIMENSIONS IN INCHES - DO NOT SCALE THIS DRAWING**  
**DIMENSIONS IN METRIC - [ ]**



RECOMMENDED MOUNTING HOLE LAYOUT

TORQUE = 0.3 TO 3.0 oz. in.  
[0.2 TO 2.0 Ncm]

**SPECIFICATIONS**

TUSONIX STYLE:	518-033 A
Value:	1.25 - 6 pF
Value Tol.:	MUST MEET MIN., MAX. -10%, +100%
Dielectric Type Code:	A
Rating:	100 VDC @ +85°C 50 VDC @ +125 °C
Operating Range:	-55°C TO + 125°C
DWV	200 VDC
IR MIN. @ 25°C	10 G Ω

X-2015 Rev-0

REVISION RECORD	0	1	2
Original Release	19990203-2-06	19990412-4-08	20031218-1-01
C.O.	19990203-2-06		
TOL. ±.030 WAS ±.020.			
S.M. 04-26-99			
PART # WAS 518-033A1.0-6.			
ADDED METRIC, DWV, IR &			
TROUQUE. VALUE WAS 1.0-6pF.			
S.M. 12-18-03			

TOLERANCES unless otherwise specified
2 PLC. DECIMAL ±
3 PLC. DECIMAL ± .015 [0.38]
ANGLES ±
<b>TUSONIX</b> TUCSON, ARIZONA

Title	<b>SIDE ADJUST MINIATURE CERAMIC TRIMMER</b>
Drawn	S.M. 02-11-99
Approved	J.Mc. 02-11-99
<b>A</b>	<b>518-033 A 1.25-6</b>