


SAW Resonators (SMD) PARS Series

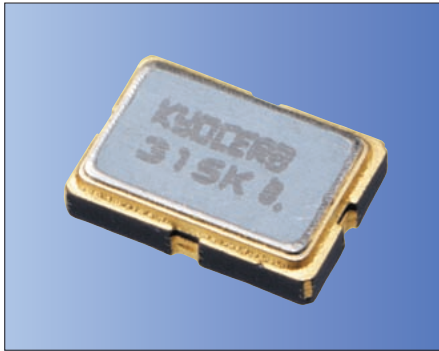

Ph Free

RoHS Compliant

Features

- Frequency range 300 to 480MHz
- 1 port type SMD resonator
- Small size (5.5×3.8mm)
- Low profile (1.5mm max.)
- SMT ceramic package
- High reliability sealing
- Excellent temperature characteristics

Applications

- Keyless Entry Systems
- Garage Openers
- Security Systems

How to Order

PARS 315.00 K 00 R
① ② ③ ④ ⑤


- ① Series
- ② Resonant Frequency (MHz)
- ③ Marking Code
- ④ Frequency Tolerance or Custom Spec.

00	±250kHz	04	±75kHz
01	±200kHz	05	±50kHz
02	±150kHz	11≤	Custom Spec.
03	±100kHz		

- ⑤ Packaging
R: Tape & Reel (2000 pcs./ Reel)


Dimensions

(Unit: mm)

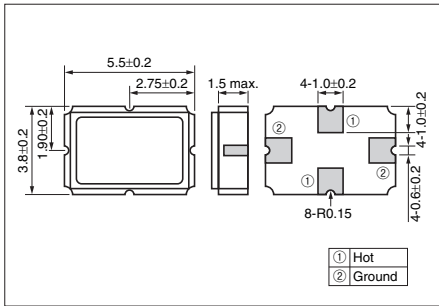


Recommended Land Pattern

(Unit: mm)

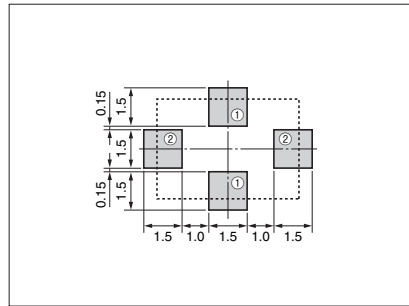

Packaging

(Unit: mm)

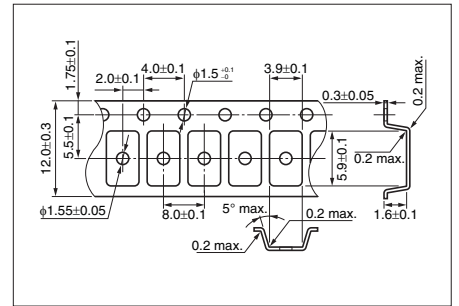

Specifications

Part Number	Resonant Frequency (MHz)	Resonant Loss (dB)	Parallel Capacitance (pF)	Temperature Characteristics (ppm/ °C ²)
PARS303.00N04R	303.000±0.075	2.5 max.	4.0 max.	-0.03 typ.
PARS303.33L04R	303.330±0.075			
PARS303.82M04R	303.825±0.075			
PARS303.87K04R	303.875±0.075			
PARS304.30K04R	304.300±0.075			
PARS304.45L04R	304.450±0.075			
PARS310.00K04R	310.000±0.075		3.2 max.	
PARS314.00K04R	314.000±0.075			
PARS314.50L04R	314.500±0.075			
PARS315.00K04R	315.000±0.075			
PARS320.65K04R	320.650±0.075			
PARS345.00K04R	345.000±0.075			
PARS418.00K04R	418.000±0.075		2.3 max.	
PARS423.22K04R	423.220±0.075			
PARS432.92K04R	432.920±0.075			
PARS433.42L04R	433.420±0.075			
PARS433.92K04R	433.920±0.075			
PARS479.50K04R	479.500±0.075			

* Please contact your local sales office for custom frequency.

Recommended Temperature IR Reflow

