

ELECTRICAL SPECIFICATIONS:

Current rating: (see chart)
 Voltage rating: 125/250 VAC
 Operating frequency: 50/60 Hz
 Leakage current: 0.8mA max. @ 250 VAC 50 Hz


Hipot rating: (for one minute)
 Line to line: 1450 VDC
 Line to ground: 1800 VAC

Insulation resistance: 100 Mohm min. @ 250 VDC


Direct current resistance:	1	3	6	10	CURRENT (A)
	0.7 max.	0.3 max.	0.15 max.	0.1 max.	RESISTANCE (ohm)

Operating temperature range: -25°C to +85°C

APPROVALS:   ONLY FOR 1, 3, & 6 AMP

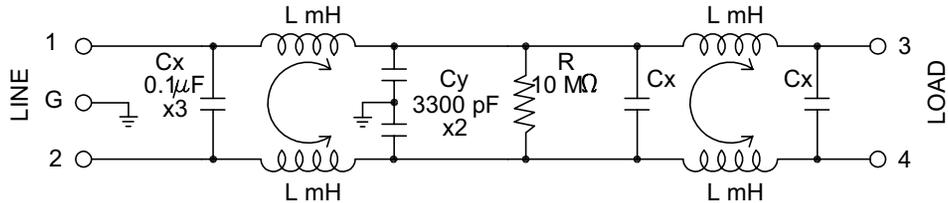

SCHEMATIC

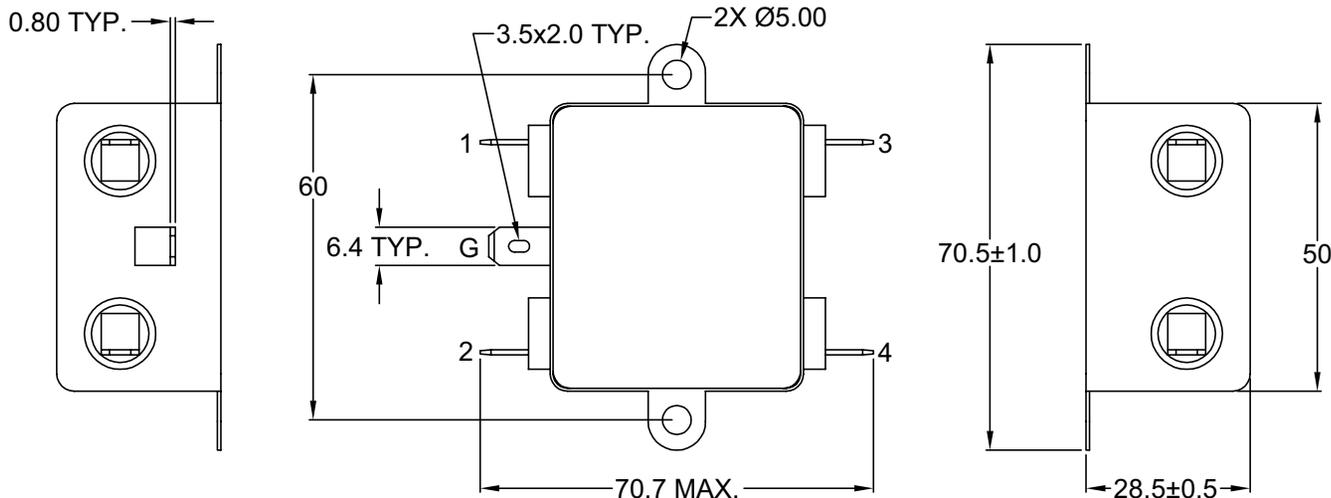

REVISIONS	CHNG	CHECK	APPR
	CHANGE		
	DATE		
	REV		

PART NUMBER	CURRENT RATING	L (mH)
PC01F-L2	1 AMP	4 x 3.7
PC03F-L2	3 AMP	4 x 1.8
PC06F-L2	6 AMP	4 x 0.7
PC10F-L2	10 AMP	4 x 0.3

TOLERANCE UNLESS OTHERWISE SPECIFIED	
X	± 1
X.X	± 0.4
X.XX	± 0.20
DRAWN BY	GQ
DATE:	12/20/01
CHECK BY	TD
DATE:	01/02/02
APPR BY	PB
DATE:	01/02/02


Power Dynamics, Inc.

Phone: 973 560-0019 Whippany, New Jersey Fax: 973 560-0076


PART: TWO STAGE EMI/RMI MODULE FILTER 1, 3, 6, & 10A, QC TERIMANLS

PART #: PCXXF-L2		SHEET 1 of 2
SIZE: A	ALL DIMENSIONS FOR REFERENCE ONLY	
SCALE: NTS	DIMENSIONS ARE IN MILLIMETERS	
REV:		

PC01F-L2

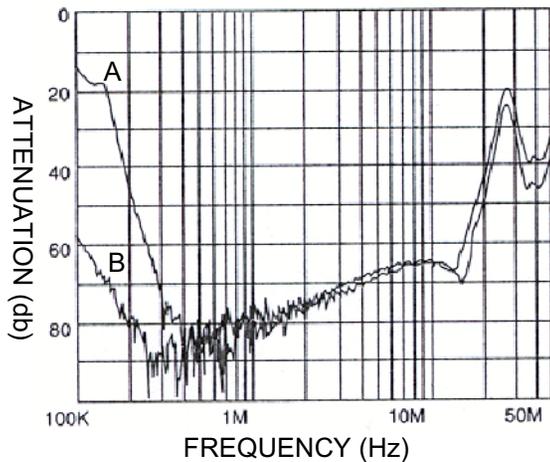


PC03F-L2

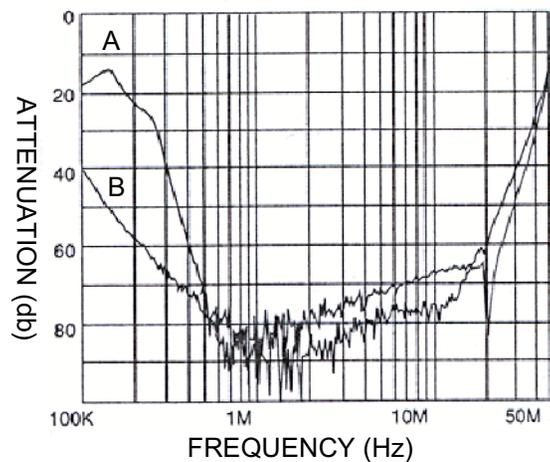


A - NORMAL MODE
B - COMMON MODE

PC06F-L2

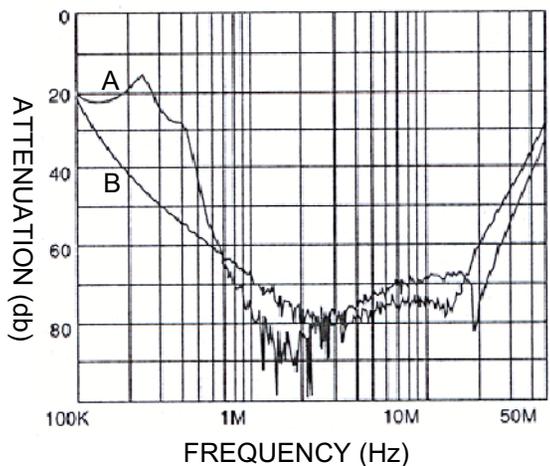

PC10F-L2

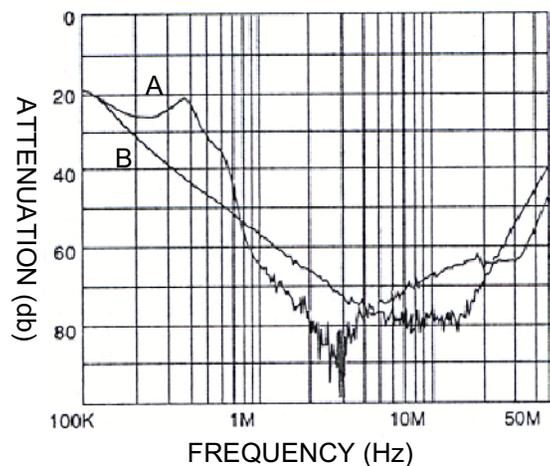

REVISIONS

SEE SHT 1 FOR LATEST REV.

TOLERANCE UNLESS OTHERWISE SPECIFIED	
X	± 1
X.X	± 0.4
X.XX	± 0.20

Power Dynamics, Inc.

Phone: 973 560-0019 Whippany, New Jersey Fax: 973 560-0076

PART: TWO STAGE EMI/RMI MODULE FILTER 1, 3,
6, & 10A, QC TERMINALS

DRAWN BY	GQ	DATE:	12/20/01
CHECK BY	TD	DATE:	01/02/02
APPR BY	PB	DATE:	01/02/02

PART #: PCXXF-L2		SHEET
SIZE: A		1 of 1
SCALE: NTS	ALL DIMENSIONS FOR REFERENCE ONLY DIMENSIONS ARE IN MILLIMETERS	REV: