


## Features and Benefits of PAN-TERM Disconnects

Panduit PAN-TERM Disconnects are designed and precision-made to function as a reliable method of making quick, slip-on interconnections. Available with nylon or vinyl insulation, or non-insulated, PAN-TERM female disconnects are fabricated from brass and are electro-tin plated for long, corrosion resistant operating life.

PAN-TERM disconnects are available in configurations designed to satisfy varying application requirements. The features of these configurations are detailed below:


### STANDARD NYLON FULLY INSULATED FEMALE RECEPTACLES AND MALE TABS

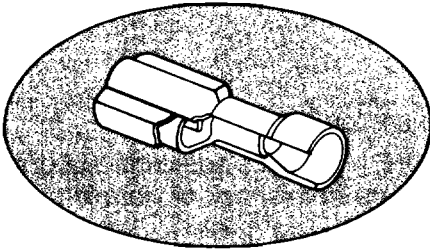


1. **INSULATION SUPPORT** – for normal strain requirements.
2. **FULLY INSULATED DESIGN** – provides excellent protection from shorting and shocks.
3. **FUNNEL ENTRY** – speeds wire insertion.
4. **EXPANDED WIRE ENTRY** – allows wires with large insulation or multiple wires to be installed. Available in both males and females.
5. **FEMALES** – available in standard coupler configurations, low profile, and right angle styles. Sizes available to mate with .187", .205", or .250" wide male tabs.
6. **MALES** – available in .250" width in both standard and oversized housing configurations. Oversized housings will mate with virtually all manufacturers' female disconnects.
7. **RATED** – at 600 volts and designed for up to 125°C (257°F).

### PREMIUM NYLON FULLY INSULATED FEMALE RECEPTACLES AND MALE TABS

1. **DISCOGRIP™** – provides a superior insulation crimp for high vibration and high strain relief. Exceeds IEC requirements for insulation pullout.
2. **FUNNEL ENTRY** – speeds wire insertion.
3. **RATED** – at 600 volts and designed for up to 105°C (221°F) operating temperatures.

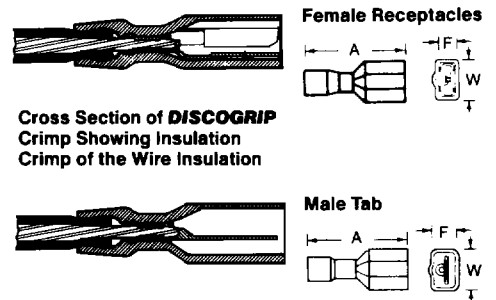

### SUPRA-GRIP™ NYLON FULLY INSULATED DISCONNECTS

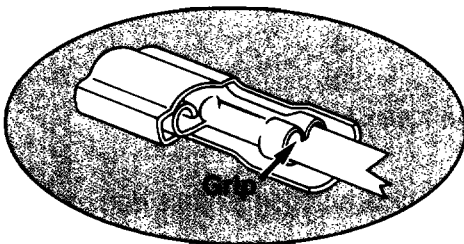


1. **INTEGRATED METAL INSULATION GRIP** – provides DOUBLE CRIMP insulation support for high vibration or conductor strain environments.
2. **FUNNEL ENTRY** – speeds wire insertion.

# PANDUIT® PAN-TERM® Disconnects


## Features and Benefits of PAN-TERM Disconnects (continued)

### DISCO-LOK™ NYLON FULLY INSULATED DISCONNECTS

1. **DISCO-LOK POSITIVE LOCKING MECHANISM** – design allows for lower insertion force and locking withdrawal force. Separation occurs only when intended.
2. **INTEGRATED METAL INSULATION GRIP** – provides DOUBLE CRIMP insulation support for high vibration or conductor strain environments.
3. **FUNNEL ENTRY** – speeds wire insertion.

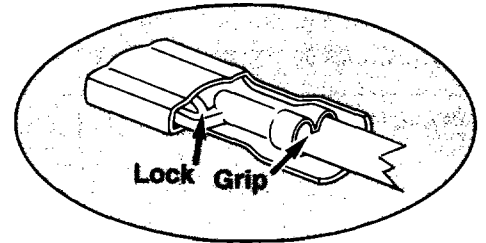


### NYLON BARREL INSULATED

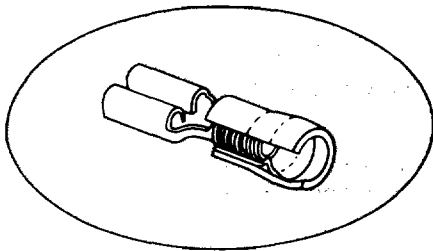


1. **FUNNEL ENTRY** – speeds wire insertion.
2. **METAL INSULATION GRIP SLEEVE** – provides additional support to the wire and helps to prevent failure from shock or vibration.
3. **RATED** – for a total operating temperature of 90°C (194°F).

### VINYL BARREL INSULATED FEMALE RECEPTACLES AND MALE TABS

1. **INSULATION SUPPORT** – for normal strain requirements.
2. **FEMALES** – available in .187", .205", and .250" sizes.
3. **MALES** – available in .250" width tabs.
4. **RATED** – at 600 volts and 105°C (221°F).

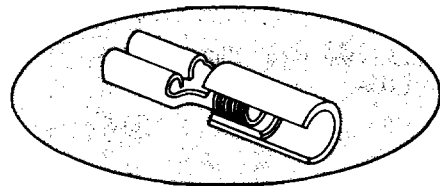

### NON-INSULATED DISCONNECTS






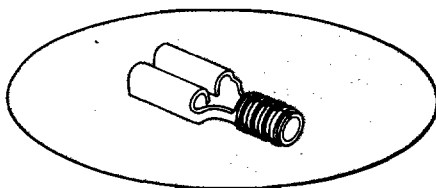


Available in:

1. **SLEEVED BARREL** – provides excellent wire retention.
- or-
2. **BUTTED SEAM** – offers an economical solution for less demanding applications.

# PANUIT® PAN-TERM® Disconnects

## Features and Benefits of PAN-TERM Disconnects (continued)

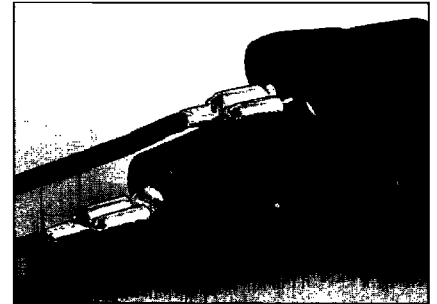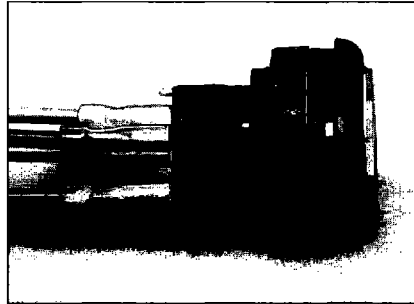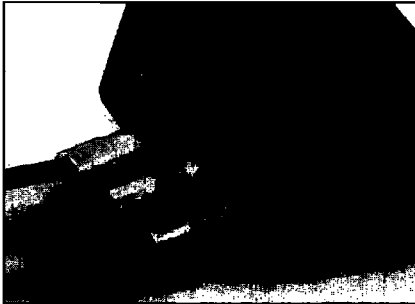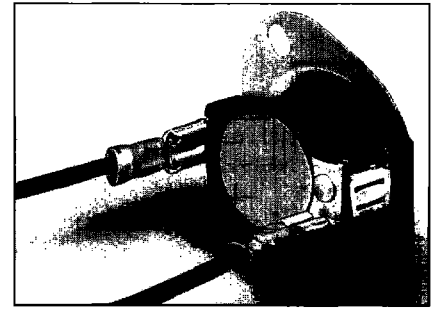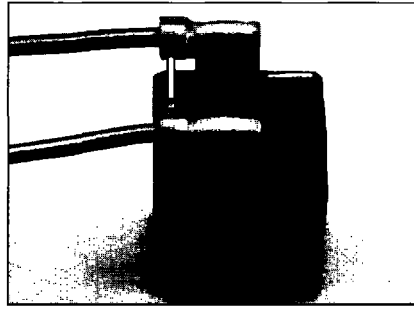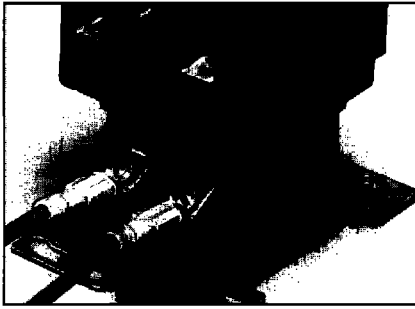

### Typical applications using PAN-TERM Disconnects

#### Performance Requirements


	Wire Size (AWG)						
	#22	#20	#18	#16	#14	#12	#10
<b>UL310 (DISCONNECTS)</b>							
Continuous Test Current for Max. 30°C Rise (Amps) (for .187", .205", .250" tab widths)	3	4	7	10	15	20	24
Continuous Test Current for Max. 30°C Rise (Amps) (for .110" tab width)	2	3	4	5	Not Applicable		
Min. Tensile Strength (Lbs.)	8	13	20	30	50	70	80

Applicable **PAN-TERM** products meet or exceed the following test specifications:

- UL310 (Disconnects)
- CSA C22.2 No. 65 (all designs)

U.L. and CSA listed products are shown with the applicable logos in the product section. U.L. file #E78522. CSA file #LR31212. The metal insulation grip designs and premium grade nylon insulated designs meet the insulation retention requirements of European testing agencies such as VDE and TÜV and specifications such as IEC.

#### Part Number System for PAN-TERM Disconnects

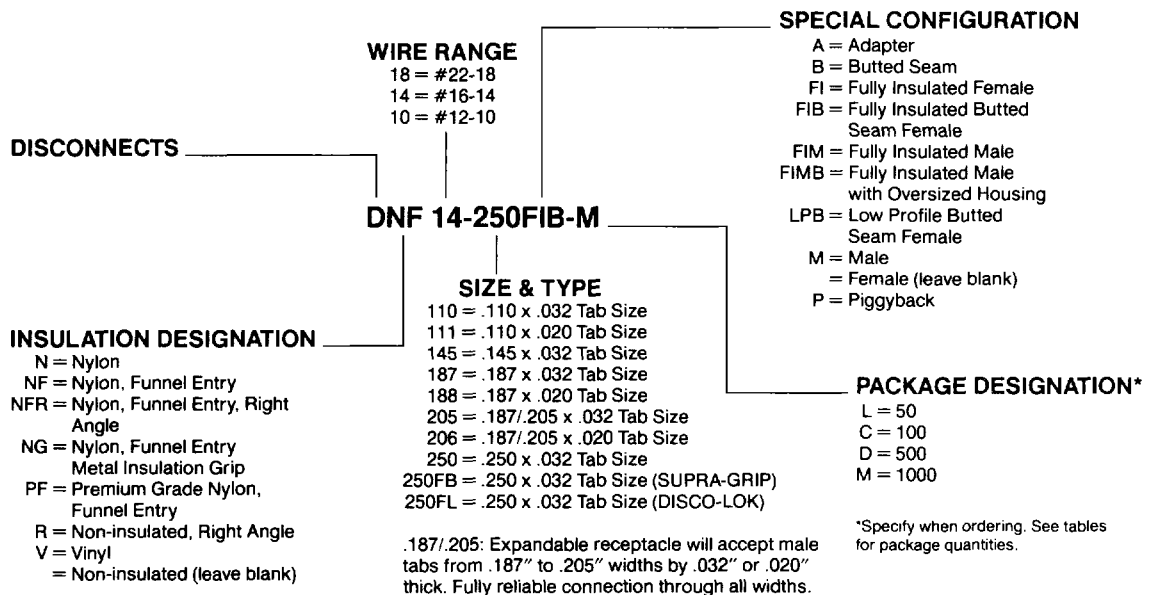

# PANDUIT® PAN-TERM® Disconnects

## SUPRA-GRIP™ FEMALE DISCONNECTS

### Nylon Fully Pre-Insulated

- Funnel Entry
- Integrated metal insulation grip to meet double crimp requirements
- Color coded insulation
- Internal wire barrel serrations for maximum crimp tensile strength
- Tab size clearly marked on insulation housing
- Tin plated brass stamping
- Wire stop


Panduit **SUPRA-GRIP** fully pre-insulated disconnects offer a funnel entry metal insulation grip that provides insulation pullout performance that exceeds IEC requirements and allows for end product certification to European Test Agencies such as VDE and TÜV.

Part Number	Wire Range	Color Code	Max. Ins.	Dim. (In.)			Tab Size	Std. Pkg. Qty.	Std. Ctn. Qty.	Bulk Pkg. Qty.	Bulk Ctn. Qty.
				A	W	F					
<b>DNQ18-250FB-C</b>	22-18	Red	.126	.94	.35	.22	.250 x .032	100	1000	1000	6000
<b>DNQ14-250FB-C</b>	16-14	Blue	.153	.94	.35	.25	.250 x .032	100	1000	1000	6000

Order the number of pieces required in multiples of standard package quantities.  
C = 100 pcs. and M = 1000 pcs.



C.S.A. Certified U.L. Pending



## DISCO-LOK™ FEMALE DISCONNECTS

### Nylon Fully Pre-Insulated

- Positive Locking Mechanism: Design allows for Low Insertion Force (mating) and Locking Withdrawal Force (separation).
- Plus, all of the following features:
  - Fully pre-insulated (color coded)
  - Integrated funnel entry insulation grip
  - Internal wire barrel serrations
  - Tab size markings
  - Tin plated brass stamping
  - Temperature rating: 125°C maximum


Introducing **DISCO-LOK**, the world's first fully pre-insulated positive locking disconnect receptacle. Ideal for high vibration applications where ease of insertion is important and security of connection is mandatory. This feature provides benefits to all markets.

Part Number	Wire Range	Color Code	Max. Ins.	Dim. (In.)			Tab Size	Std. Pkg. Qty.	Std. Ctn. Qty.	Bulk Pkg. Qty.	Bulk Ctn. Qty.
				A	W	F					
<b>DNQ18-250FL-C</b>	22-18	Red	.126	.97	.36	.25	.250 x .032	100	1000	1000	6000
<b>DNQ14-250FL-C</b>	16-14	Blue	.150	.97	.36	.25	.250 x .032	100	1000	1000	6000

Order the number of pieces required in multiples of standard package quantities.  
C = 100 pcs. and M = 1000 pcs.



C.S.A. Certified U.L. Pending



## MALE/FEMALE COUPLERS

### Nylon Fully Pre-insulated

- Funnel Entry
- Insulation Support
- Internal Wire Stop


Forms in-line disconnectable splice. Helps prevent shorting or shocks when disconnecting live circuits. Keyed for proper orientation. Each can be used alone as a fully pre-insulated disconnect.

Part Number	Wire Range	Color Code	Max. Ins.	Dim. (In.)			Tab Size	Type	Std. Pkg. Qty.	Std. Ctn. Qty.	Bulk Pkg. Qty.	Bulk Ctn. Qty.
				A	W	F						
<b>DNF18-250FMB-C</b>	22-18	Red	.136	.91	.42	.31	250 x .032	Male	100	1000	1000	6000
<b>DNF18-250FMB-C</b>		Red	.136	.84	.35	.24	250 x .032	Female	100	1000	1000	6000
<b>DNF14-250FMB-C</b>	16-14	Blue	.160	.91	.42	.31	250 x .032	Male	100	1000	1000	6000
<b>DNF14-250FMB-C</b>		Blue	.160	.84	.35	.24	250 x .032	Female	100	1000	1000	6000

Order the number of pieces required in multiples of standard package quantities.  
C = 100 pcs. and M = 1000 pcs.

Part Number	Wire Range	Color Code	Max. Ins.	Dim. (In.)			Tab Size	Std. Pkg. Qty.	Std. Ctn. Qty.	Bulk Pkg. Qty.	Bulk Ctn. Qty.
				A	W	F					
<b>DNF18-250FMB-L</b>	22-18	Red	.136	.91	.45	.37	.250 X .032	50	500	500	3000
<b>DNF14-250FMB-L</b>	16-14	Blue	.160	.91	.45	.37	.250 x .032	50	500	500	3000

\*Oversized housing design will mate with receptacles up to .390" wide and .235" high (.285" high for parts with orientation bump).  
Order the number of pieces required in multiples of standard package quantities.  
L = 50 pcs., C = 100 pcs., D = 500 pcs., and M = 1000 pcs.



LISTED




CERTIFIED

# PANDUIT® PAN-TERM® Disconnects

## FEMALE DISCONNECTS

### Nylon Fully Pre-Insulated

- Funnel Entry
- Insulation Support
- Internal Wire Stop




Part Number	Wire Range	Color Code	Max. Ins.	Dim. (in.)			Tab Size	Std. Pkg. Qty.	Std. Ctn. Qty.	Bulk Pkg. Qty.	Bulk Ctn. Qty.
				A	W	F					
DPF18-200F18-C	22-18	Red	.136	.71	.19	.16	.110 x .032	100	1000	1000	6000
DPF18-200F18-C	22-18	Red	.136	.71	.19	.16	.110 x .020	100	1000	1000	6000
DPF18-200F18-C	22-18	Red	.136	.78	.31	.24	.205/.187 x .032	100	1000	1000	6000
DPF18-200F18-C	22-18	Red	.136	.78	.31	.24	.205/.187 x .020	100	1000	1000	6000
DPF18-200F18-C	22-18	Red	.136	.84	.35	.24	.250 x .032	100	1000	1000	6000
DPF14-200F14-C	16-14	Blue	.160	.78	.31	.24	.205/.187 x .032	100	1000	1000	6000
DPF14-200F14-C	16-14	Blue	.160	.78	.31	.24	.205/.187 x .020	100	1000	1000	6000
DPF14-200F14-C	16-14	Blue	.160	.84	.35	.24	.250 x .032	100	1000	1000	6000
DPF12-200F12-L	12-10	Yellow	.220	.95	.36	.23	.250 x .032	50	500	500	3000

Order the number of pieces required in multiples of standard package quantities.  
C = 100 pcs. and M = 1000 pcs.

## FEMALE DISCONNECTS

### Nylon Fully Pre-Insulated

- Low Profile
- Funnel Entry
- Insulation Support
- Low Profile Receptacle Housings for Tight Space Applications
- Internal Wire Stop



Part Number	Wire Range	Color Code	Max. Ins.	Dim. (in.)			Tab Size	Std. Pkg. Qty.	Std. Ctn. Qty.	Bulk Pkg. Qty.	Bulk Ctn. Qty.
				A	W	F					
DPF18-200F18-C	22-18	Red	.136	.84	.35	.17	.250 x .032	100	1000	1000	6000
DPF14-200F14-C	16-14	Blue	.160	.84	.35	.19	.250 x .032	100	1000	1000	6000


Order the number of pieces required in multiples of standard package quantities.  
C = 100 pcs. and M = 1000 pcs.

## DISCO-GRIP™

### Insulation Crimp MALE DISCONNECTS

#### Premium Nylon Fully Insulated

- Funnel Entry
- Internal Wire Stop



Part Number	Wire Range	Color Code	Max. Ins.	Dim. (in.)			Tab Size	Std. Pkg. Qty.	Std. Ctn. Qty.	Bulk Pkg. Qty.	Bulk Ctn. Qty.
				A	W	F					
DPF18-200F18-C	22-18	Red	.136	.91	.42	.31	.250 x .032	100	1000	1000	6000
DPF16-200F16-C	16-14	Blue	.160	.91	.42	.31	.250 x .032	100	1000	1000	6000
DPF18-200F18-L	22-18	Red	.136	.91	.45	.37	.250 x .032	50	500	500	3000
DPF14-200F14-L	16-14	Blue	.160	.91	.45	.37	.250 x .032	50	500	500	3000


\*Oversized housing design will mate with receptacles up to .390" wide and .285" high (for parts with orientation bump).  
Order the number of pieces required in multiples of standard package quantities.  
L = 50 pcs., C = 100 pcs., D = 500 pcs. and M = 1000 pcs.

## DISCO-GRIP™

### Insulation Crimp FEMALE DISCONNECTS

#### Premium Nylon Fully Insulated

- Funnel Entry
- Internal Wire Stop



Part Number	Wire Range	Color Code	Max. Ins.	Dim. (in.)			Tab Size	Std. Pkg. Qty.	Std. Ctn. Qty.	Bulk Pkg. Qty.	Bulk Ctn. Qty.
				A	W	F					
DPF18-110F18-C	22-18	Red	.136	.71	.19	.16	.110 x .032	100	1000	1000	6000
DPF18-110F18-C	22-18	Red	.136	.71	.19	.16	.110 x .020	100	1000	1000	6000
DPF18-200F18-C	22-18	Red	.136	.78	.31	.29	.205/.187 x .032	100	1000	1000	6000
DPF18-200F18-C	22-18	Red	.136	.78	.31	.24	.205/.187 x .020	100	1000	1000	6000
DPF18-200F18-C	22-18	Red	.136	.78	.35	.24	.250 x .032	100	1000	1000	6000
DPF14-200F14-C	16-14	Blue	.160	.78	.31	.24	.205/.187 x .032	100	1000	1000	6000
DPF14-200F14-C	16-14	Blue	.160	.78	.31	.24	.205/.187 x .020	100	1000	1000	6000
DPF14-200F14-C	16-14	Blue	.160	.84	.35	.24	.250 x .032	100	1000	1000	6000

Order the number of pieces required in multiples of standard package quantities.  
L = 50 pcs., C = 100 pcs., D = 500 pcs. and M = 1000 pcs.



SECTION VIEW OF CRIMPED DISCONNECT

# PANDUIT® PAN-TERM® Disconnects

## DISCO-GRIP™


### Insulation Crimp FEMALE DISCONNECTS

Premium Nylon  
Fully Insulated

- Low Profile
- Funnel Entry
- Low Profile Receptacle Housings For Tight Space Applications

Part Number	Wire Range	Color Code	Max. Ins.	Dim. (In.)			Tab Size	Std. Pkg. Qty.	Std. Ctn. Qty.	Bulk Pkg. Qty.	Bulk Ctn. Qty.
				A	W	F					
DPF18-250LPB-C	22-18	Red	.136	.84	.35	.17	.250 x .032	100	1000	1000	6000
DPF14-250LPB-C	16-14	Blue	.160	.84	.35	.19	.250 x .032	100	1000	1000	6000


Order the number of pieces required in multiples of standard package quantities.  
C = 100 pcs. and M = 1000 pcs.



## FEMALE DISCONNECTS

Nylon Insulated

- Funnel Entry
- Insulation Grip Sleeve




\*Except DNF14-110 and DNF14-111

Part Number	Wire Range	Color Code	Max. Ins.	Dim. (In.)		Tab Size	Std. Pkg. Qty.	Std. Ctn. Qty.	Bulk Pkg. Qty.	Bulk Ctn. Qty.
				A	W					
DNF18-110-C	22-18	Red	.100	.70	.15	.110 x .032	100	500	1000	6000
DNF18-111-C	22-18	Red	.100	.70	.15	.110 x .020	100	500	1000	6000
DNF18-187-C	22-18	Red	.130	.76	.23	.187 x .032	100	500	1000	6000
DNF18-188-C	22-18	Red	.130	.76	.23	.187 x .020	100	500	1000	6000
DNF18-205-C	22-18	Red	.130	.76	.25	.205/.187 x .032	100	500	1000	6000
DNF18-206-C	22-18	Red	.130	.76	.25	.205/.187 x .020	100	500	1000	6000
DNF18-250-C	22-18	Red	.130	.82	.29	.250 x .032	100	500	1000	6000
DNF14-110-C	16-14	Blue	.160	.75	.15	.110 x .032	100	500	1000	6000
DNF14-111-C	16-14	Blue	.160	.75	.15	.110 x .020	100	500	1000	6000
DNF14-187-C	16-14	Blue	.160	.76	.23	.187 x .032	100	500	1000	6000
DNF14-188-C	16-14	Blue	.160	.76	.23	.187 x .020	100	500	1000	6000
DNF14-205-C	16-14	Blue	.160	.76	.25	.205/.187 x .032	100	500	1000	6000
DNF14-206-C	16-14	Blue	.160	.76	.25	.205/.187 x .020	100	500	1000	6000
DNF14-250-C	16-14	Blue	.160	.83	.29	.250 x .032	100	500	1000	6000

## FEMALE DISCONNECTS

Vinyl Insulated

- Butted Seam



LISTED CERTIFIED


DV18-187B-C	22-18	Red	.150	.77	.23	.187 x .032	100	500	1000	6000
DV18-188B-C	22-18	Red	.150	.77	.23	.187 x .020	100	500	1000	6000
DV18-205B-C	22-18	Red	.150	.77	.23	.205 x .032	100	500	1000	6000
DV18-206B-C	22-18	Red	.150	.77	.23	.205 x .020	100	500	1000	6000
DV18-250B-C	22-18	Red	.150	.83	.29	.250 x .032	100	500	1000	6000
DV14-187B-C	16-14	Blue	.175	.77	.23	.187 x .032	100	500	1000	6000
DV14-188B-C	16-14	Blue	.175	.77	.23	.187 x .020	100	500	1000	6000
DV14-205B-C	16-14	Blue	.175	.77	.23	.205 x .032	100	500	1000	6000
DV14-206B-C	16-14	Blue	.175	.77	.23	.205 x .020	100	500	1000	6000
DV14-250B-C	16-14	Blue	.175	.83	.29	.250 x .032	100	500	1000	6000
DV10-250-L	12-10	Yellow	.210	1.04	.29	.250 x .032	50	500	500	3000

▲Sleeved Barrel

## FEMALE DISCONNECTS

Non-Insulated

- Sleeved Barrel



LISTED RECOGNIZED CERTIFIED

Part Number	Wire Range	Color Code	Max. Ins.	Dim. (In.)		Tab Size	Std. Pkg. Qty.	Std. Ctn. Qty.	Bulk Pkg. Qty.	Bulk Ctn. Qty.
				A	W					
D18-188-C	22-18	—	—	.60	.23	.187 x .020	100	500	1000	10,000
D18-250-C	22-18	—	—	.66	.29	.250 x .032	100	500	1000	10,000
D14-188-C	16-14	—	—	.60	.23	.187 x .020	100	500	1000	10,000
D14-250-C	16-14	—	—	.66	.29	.250 x .032	100	500	1000	10,000
D10-250-L	12-10	—	—	.76	.29	.250 x .032	50	500	500	5000
D18-110B-C	22-18	—	—	.52	.15	.110 x .032	100	500	1000	40,000
D18-111B-C	22-18	—	—	.52	.15	.110 x .020	100	500	1000	40,000
D18-188B-C	22-18	—	—	.55	.23	.187 x .020	100	500	1000	40,000
D18-250B-C	22-18	—	—	.62	.29	.250 x .032	100	500	1000	40,000
D14-110B-C	16-14	—	—	.52	.15	.110 x .032	100	500	1000	10,000
D14-111B-C	16-14	—	—	.52	.15	.110 x .020	100	500	1000	10,000
D14-188B-C	16-14	—	—	.56	.23	.187 x .020	100	500	1000	10,000
D14-250B-C	16-14	—	—	.61	.29	.250 x .032	100	500	1000	10,000

Order the number of pieces required in multiples of standard package quantities.  
L = 50 pcs., C = 100 pcs., D = 500 pcs., and M = 1000 pcs.




CERTIFIED

# PANDUIT® PAN-TERM® Disconnects

## RIGHT ANGLE FEMALE DISCONNECTS

### Nylon Fully Insulated

- Funnel Entry with Insulation Support
- Used in limited space applications



Part Number	Wire Range	Color Code	Max. Ins.	Dim. (In.)				Std. Tab Size	Std. Pkg. Qty.	Bulk Ctn. Qty.	Bulk Pkg. Qty.	Ctn. Qty.
				A	F	W	X					
DNFR18-205FIB-C	22-18	Red	.170	.57	.21	.37	.60	205/.187 x .032	100	1000	1000	6000
DNFR18-206FIB-C	22-18	Red	.170	.57	.21	.37	.60	205/.187 x .020	100	1000	1000	6000
DNFR18-250FIB-C	22-18	Red	.170	.57	.21	.37	.60	.250 x .032	100	1000	1000	6000
DNFR14-205FIB-C	16-14	Blue	.170	.57	.21	.37	.60	205/.187 x .032	100	1000	1000	6000
DNFR14-206FIB-C	16-14	Blue	.170	.57	.21	.37	.60	205/.187 x .020	100	1000	1000	6000
DNFR14-250FIB-C	16-14	Blue	.170	.57	.21	.37	.60	.250 x .032	100	1000	1000	6000

Order the number of pieces required in multiples of standard package quantities.


C = 100 pcs. and M = 1000 pcs.

Use CT-300-1 crimping tool. See page 42.

## RIGHT ANGLE FEMALE DISCONNECTS

### Nylon Insulated

- Funnel Entry
- Insulation Support




LISTED\* CERTIFIED\*  
\*Except DNFR 18-250, DNFR 18-205

Part Number	Wire Range	Color Code	Max. Ins.	Dim. (In.)				Std. Tab Size	Std. Pkg. Qty.	Bulk Ctn. Qty.	Bulk Pkg. Qty.	Ctn. Qty.
				A	F	W	X					
DNFR18-205B-C	22-18	Red	.130	.78	.36	.22	.62	205/.187 x .032	100	1000	1000	6000
DNFR18-206B-C	22-18	Red	.130	.78	.36	.22	.62	205/.187 x .020	100	1000	1000	6000
DNFR18-250B-C	22-18	Red	.130	.78	.36	.22	.62	.250 x .032	100	1000	1000	6000
DNFR14-205B-C	16-14	Blue	.155	.78	.36	.25	.63	205/.187 x .032	100	1000	1000	6000
DNFR14-206B-C	16-14	Blue	.155	.78	.36	.25	.63	205/.187 x .020	100	1000	1000	6000
DNFR14-250B-C	16-14	Blue	.155	.78	.36	.25	.63	.250 x .032	100	1000	1000	6000

## RIGHT ANGLE FEMALE DISCONNECTS

### Non-Insulated

- Sleeved Barrel



LISTED RECOGNIZED▲ CERTIFIED

DR18-205-C	22-18	—	—	.57	—	.25	.54	205/.187 x .032	100	1000	1000	10,000
DR18-206-C	22-18	—	—	.57	—	.25	.54	205/.187 x .020	100	1000	1000	10,000
DR18-250-C	22-18	—	—	.57	—	.29	.54	.250 x .032	100	1000	1000	10,000
DR14-205-C	16-14	—	—	.57	—	.25	.55	205/.187 x .032	100	1000	1000	10,000
DR14-206-C	16-14	—	—	.57	—	.25	.55	205/.187 x .020	100	1000	1000	10,000
DR14-250-C	16-14	—	—	.57	—	.29	.55	.250 x .032	100	1000	1000	10,000
DR10-250-L	12-10	—	—	.62	—	.29	.58	.250 x .032	50	500	500	5000
DR18-205B-C	22-18	—	—	.55	—	.25	.54	205/.187 x .032	100	1000	1000	10,000
DR18-206B-C	22-18	—	—	.55	—	.25	.54	205/.187 x .020	100	1000	1000	10,000
DR18-250B-C	22-18	—	—	.55	—	.29	.54	.250 x .032	100	1000	1000	10,000
DR14-205B-C	16-14	—	—	.55	—	.25	.55	205/.187 x .032	100	1000	1000	10,000
DR14-206B-C	16-14	—	—	.55	—	.25	.55	205/.187 x .020	100	1000	1000	10,000
DR14-250B-C	16-14	—	—	.55	—	.29	.55	.250 x .032	100	1000	1000	10,000

Order the number of pieces required in multiples of standard package quantities.

L = 50 pcs., C = 100 pcs., D = 500 pcs., and M = 1000 pcs.

## RIGHT ANGLE FEMALE DISCONNECTS

### Non-Insulated

- Butted Seam



# PANDUIT® PAN-TERM® Disconnects


## PIGGYBACK DISCONNECTS

### Vinyl Insulated

- Insulation Grip Sleeve

Female and male tabs combined in one disconnect.

Allows additional circuits to be added to existing equipment or ability to add future circuits—no costly rework or product changes needed.




Part Number	Wire Range	Color Code	Max. Ins.	Dim. (In.)			Tab Size	Std. Pkg. Qty.	Std. Ctn. Qty.	Bulk Pkg. Qty.	Bulk Ctn. Qty.
				A	W	F					
D1710-2500-C D1710-2500-M	22-18	Red	.145	.88	.30	.25	.250 x .032	100	1000	1000	6000
	16-14	Blue	.160	.88	.30	.25	.250 x .032	100	1000	1000	6000
D-2500-C	—	—	—	See drawing			.250 x .032	100	1000	1000	10,000

Order the number of pieces required in multiples of standard package quantities.  
C = 100 pcs. and M = 1000 pcs.

## DISCONNECT ADAPTER

### Non-Insulated




Couples two female disconnects to one male disconnect  
(all .250 x .032)

## MALE DISCONNECTS

### Nylon Insulated

- Funnel Entry
- Insulation Grip Sleeve




Part Number	Wire Range	Color Code	Max. Ins.	Dim. (In.)	Tab Size	Std. Pkg. Qty.	Std. Ctn. Qty.	Bulk Pkg. Qty.	Bulk Ctn. Qty.
				A					
D1110-2500-C D1114-2500-C D1110-2500-L	22-18	Red	.136	.90	.250 x .032	100	1000	1000	6000
	16-14	Blue	.162	.93	.250 x .032	100	1000	1000	6000
	12-10	Yellow	.235	.90	.250 x .032	50	500	500	3000

## MALE DISCONNECTS

### Vinyl Insulated

- Butted Seam




D1110-2500-C D1114-2500-C D1110-2500-L	22-18	Red	.150	.97	.250 x .032	100	500	1000	6000
	16-14	Blue	.175	.97	.250 x .032	100	500	1000	6000
	12-10	Yellow	.235	1.00	.250 x .032	50	500	500	3000

## MALE DISCONNECTS

### Non-Insulated

- Butted Seam



D1110-2500-C D1114-2500-C D1110-2500-L	22-18	—	—	.75	.250 x .032	100	500	1000	10,000
	16-14	—	—	.75	.250 x .032	100	500	1000	10,000
	12-10	—	—	.75	.250 x .032	50	500	500	5000

▲ = Brazed Seam  
Order the number of pieces required in multiples of standard package quantities.  
L = 50 pcs., C = 100 pcs., D = 500 pcs., and M = 1000 pcs.