




Dual In-Line Adapters / Discrete Component Carriers

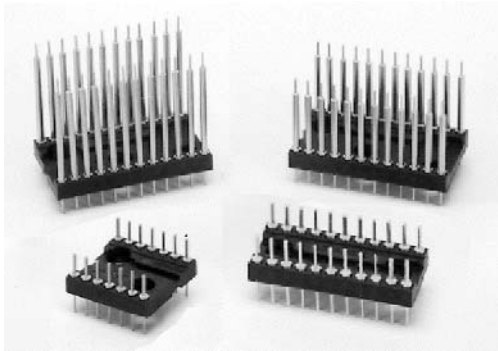

Features:

- Low Profile.
- Design allows for stacking on .100"(2.54mm) grid.
- Board to Board applicable.
- For hand soldering or surface mount applications use HDA only.
- Easily customized to fit your application.
- Also available in open frame see pages 82 and 83 for details.

Terminals:

Brass - Copper Alloy (C36000),
ASTM-B-16


Plating:

Gold over Nickel or
Tin-Lead over Nickel

Standard Adapters

DA - Insulator Material:
Glass Filled Thermoplastic Polyester (P.B.T.)
U.L. Rated 94V-O, -60°C to 140°C (-76°F to 284°F)


How To Order

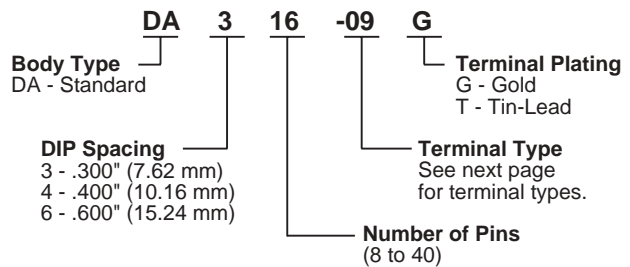


High Temperature Adapters

HDA - Insulator Material:
High Temp. Glass Filled Thermoplastic
U.L. Rated 94V-O, -60°C to 260°C (-76°F to 500°F)



How To Order

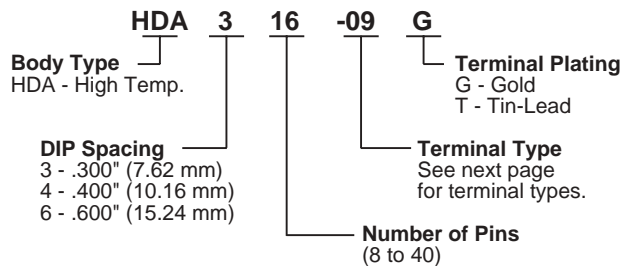





Dual In-Line Adapters / Discrete Component Carriers

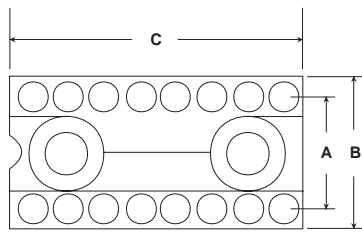

Terminal Type -09 Shown









Terminal Information



Dimensional Information

# of Pins	A	B	C
8	.300 (7.62)	.400 (10.16)	.400 (10.16)
14	.300 (7.62)	.400 (10.16)	.700 (17.78)
16	.300 (7.62)	.400 (10.16)	.800 (20.32)
18	.300 (7.62)	.400 (10.16)	.900 (22.86)
20	.300 (7.62)	.400 (10.16)	1.000 (25.40)
22	.400 (10.16)	.500 (12.70)	1.100 (27.94)
24	.600 (15.24)	.700 (17.78)	1.200 (30.48)
28	.600 (15.24)	.700 (17.78)	1.400 (35.56)
40	.600 (15.24)	.700 (17.78)	2.000 (50.80)



 Quick turn delivery available on standard terminal types.

**Additional terminal types available.
See terminal section for detailed terminal information.**