


PNP Silicon AF Transistors

BC 856 ... BC 860

Features

- For AF input stages and driver applications
- High current gain
- Low collector-emitter saturation voltage
- Low noise between 30 Hz and 15 kHz
- Complementary types: BC 846, BC 847,
BC 849, BC 850 (NPN)

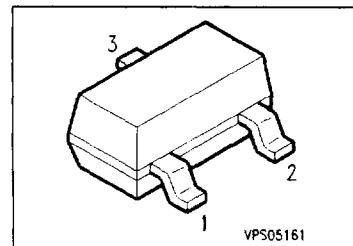

Type	Marking	Ordering Code (tape and reel)	Pin Configuration			Package ¹⁾
			1	2	3	
BC 856 A	3As	Q62702-C1773	B	E	C	SOT-23
BC 856 B	3Bs	Q62702-C1886				
BC 857 A	3Es	Q62702-C1850				
BC 857 B	3Fs	Q62702-C1688				
BC 857 C	3Gs	Q62702-C1851				
BC 858 A	3Js	Q62702-C1742				
BC 858 B	3Ks	Q62702-C1698				
BC 858 C	3Ls	Q62702-C1507				
BC 859 A	4As	Q62702-C1887				
BC 859 B	4Bs	Q62702-C1774				
BC 859 C	4Cs	Q62702-C1761				
BC 860 B	4Fs	Q62702-C1888				
BC 860 C	4Gs	Q62702-C1889				

¹⁾For detailed information see chapter Package Outlines.

Maximum Ratings

Parameter	Symbol	Values			Unit	
		BC 856	BC 857 BC 860	BC 858 BC 859		
Collector-emitter voltage	V_{CEO}	65	45	30	V	
Collector-base voltage	V_{CBO}	80	50	30		
Collector-emitter voltage	V_{CES}	80	50	30		
Emitter-base voltage	V_{EBO}	5	5	5		
Collector current	I_C	100			mA	
Peak collector current	I_{CM}	200				
Peak base current	I_{BM}	200				
Peak emitter current	I_{EM}	200				
Total power dissipation, $T_S = 71\text{ }^\circ\text{C}$	P_{tot}	330			mW	
Junction temperature	T_j	150			$^\circ\text{C}$	
Storage temperature range	T_{stg}	- 65 ... + 150				

Thermal Resistance

Junction - ambient ¹⁾	$R_{th JA}$	≤ 310	K/W
Junction - soldering point	$R_{th JS}$	≤ 240	

¹⁾Package mounted on epoxy pcb 40 mm × 40 mm × 1.5 mm/6 cm² Cu.

Electrical Characteristicsat $T_A = 25^\circ\text{C}$, unless otherwise specified.

Parameter	Symbol	Values			Unit
		min.	typ.	max.	

DC characteristics

Collector-emitter breakdown voltage $I_C = 10 \text{ mA}$	$V_{(BR)CEO}$	65 45 30	— — —	— — —	V
Collector-base breakdown voltage $I_C = 10 \mu\text{A}$	$V_{(BR)CBO}$	80 50 30	— — —	— — —	
Collector-emitter breakdown voltage $I_C = 10 \mu\text{A}, V_{BE} = 0$	$V_{(BR)CES}$	80 50 30	— — —	— — —	
Emitter-base breakdown voltage $I_E = 1 \mu\text{A}$	$V_{(BR)EBO}$	5	—	—	
Collector cutoff current $V_{CB} = 30 \text{ V}$	I_{CBO}	— —	1 —	15 4	nA μA
DC current gain $I_C = 10 \mu\text{A}, V_{CE} = 5 \text{ V}$	h_{FE}	— — —	140 250 480	— — —	—
$I_C = 2 \text{ mA}, V_{CE} = 5 \text{ V}$		125 220 420	180 290 520	250 475 800	
Collector-emitter saturation voltage ¹⁾ $I_C = 10 \text{ mA}, I_B = 0.5 \text{ mA}$	V_{CEsat}	— —	75 250	300 650	mV
Base-emitter saturation voltage ¹⁾ $I_C = 10 \text{ mA}, I_B = 0.5 \text{ mA}$	V_{BEsat}	— —	700 850	— —	
Base-emitter voltage $I_C = 2 \text{ mA}, V_{CE} = 5 \text{ V}$	$V_{BE(on)}$	600	650	750	
$I_C = 10 \text{ mA}, V_{CE} = 5 \text{ V}$		—	—	820	

¹⁾Pulse test: $t \leq 300 \mu\text{s}$, $D = 2\%$.


Electrical Characteristicsat $T_A = 25^\circ\text{C}$, unless otherwise specified.

Parameter	Symbol	Values			Unit
		min.	typ.	max.	


AC characteristics

Transition frequency $I_C = 20 \text{ mA}, V_{CE} = 5 \text{ V}, f = 100 \text{ MHz}$	f_T	-	250	-	MHz
Output capacitance $V_{CB} = 10 \text{ V}, f = 1 \text{ MHz}$	C_{OBO}	-	3	-	pF
Input capacitance $V_{CB} = 0.5 \text{ V}, f = 1 \text{ MHz}$	C_{IBO}	-	8	-	
Short-circuit input impedance $I_C = 2 \text{ mA}, V_{CE} = 5 \text{ V}, f = 1 \text{ kHz}$ BC 856 A ... BC 859 A BC 856 B ... BC 860 B BC 857 C ... BC 860 C	h_{11e}	-	2.7	-	kΩ
-	-	-	4.5	-	
-	-	-	8.7	-	
Open-circuit reverse voltage transfer ratio $I_C = 2 \text{ mA}, V_{CE} = 5 \text{ V}, f = 1 \text{ kHz}$ BC 856 A ... BC 859 A BC 856 B ... BC 860 B BC 857 C ... BC 860 C	h_{12e}	-	1.5	-	10^{-4}
-	-	-	2.0	-	
-	-	-	3.0	-	
Short-circuit forward current transfer ratio $I_C = 2 \text{ mA}, V_{CE} = 5 \text{ V}, f = 1 \text{ kHz}$ BC 856 A ... BC 859 A BC 856 B ... BC 860 B BC 857 C ... BC 860 C	h_{21e}	-	200	-	-
-	-	-	330	-	
-	-	-	600	-	
Open-circuit output admittance $I_C = 2 \text{ mA}, V_{CE} = 5 \text{ V}, f = 1 \text{ kHz}$ BC 856 A ... BC 859 A BC 856 B ... BC 860 B BC 857 C ... BC 860 C	h_{22e}	-	18	-	μS
-	-	-	30	-	
-	-	-	60	-	
Noise figure $I_C = 0.2 \text{ mA}, V_{CE} = 5 \text{ V}, R_S = 2 \text{ kΩ}$ $f = 30 \text{ Hz} \dots 15 \text{ kHz}$ BC 859 BC 860	F	-	1.2	4	dB
$f = 1 \text{ kHz}, \Delta f = 200 \text{ Hz}$ BC 859 BC 860		-	1.0	3	
		-	1.0	4	
		-	1.0	4	
Equivalent noise voltage $I_C = 0.2 \text{ mA}, V_{CE} = 5 \text{ V}, R_S = 2 \text{ kΩ}$ $f = 10 \text{ Hz} \dots 50 \text{ Hz}$ BC 860	V_n	-	-	0.110	μV


Total power dissipation $P_{\text{tot}} = f(T_A^*; T_S)$
 * Package mounted on epoxy

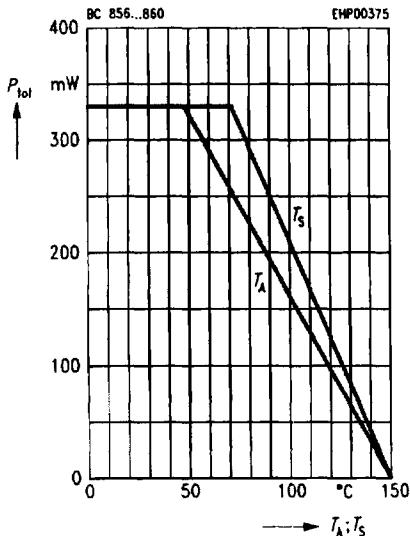


Collector-base capacitance $C_{CBO} = f(V_{CBO})$
Emitter-base capacitance $C_{EBO} = f(V_{EBO})$

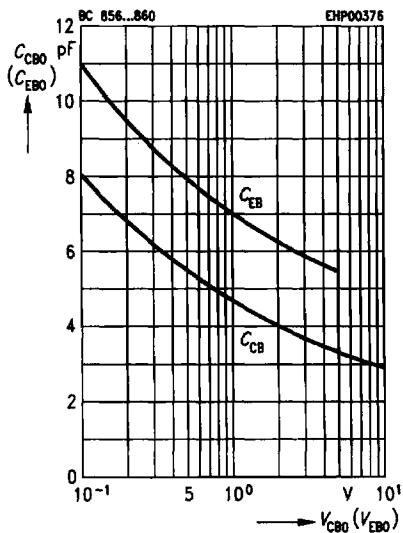


Permissible pulse load $P_{\text{tot max}}/P_{\text{tot DC}} = f(t_p)$

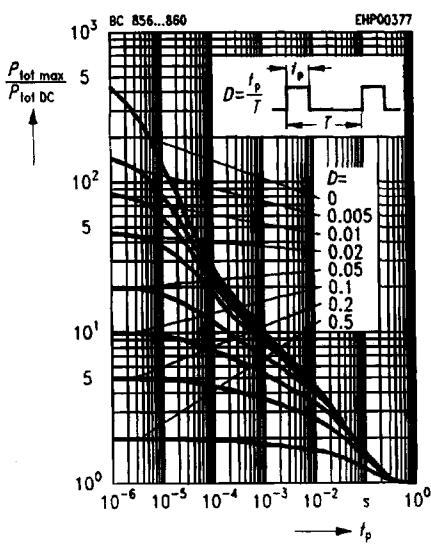


Transition frequency $f_T = f(I_C)$
 $V_{CE} = 5 \text{ V}$

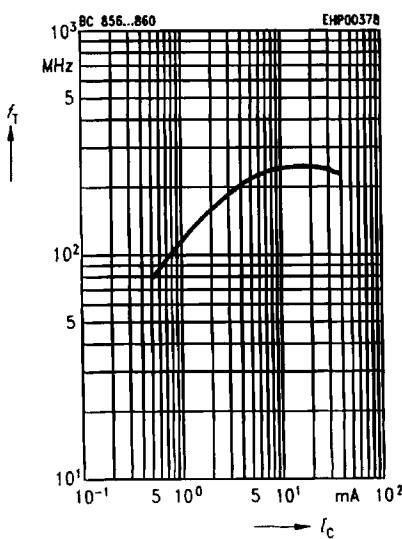


Collector cutoff current $I_{CBO} = f(T_A)$
 $V_{CB} = 30 \text{ V}$

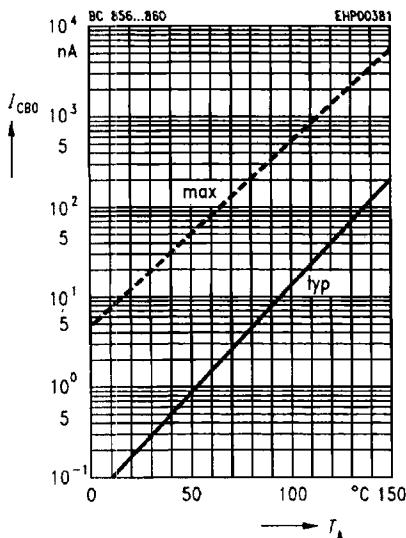


Collector-emitter saturation voltage
 $I_C = f(V_{CE\text{sat}})$, $h_{FE} = 20$

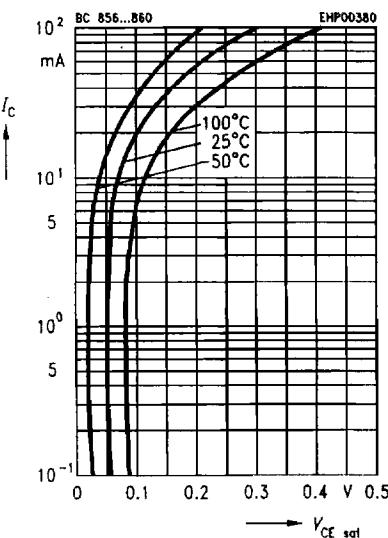


DC current gain $h_{FE} = f(I_C)$
 $V_{CE} = 5 \text{ V}$

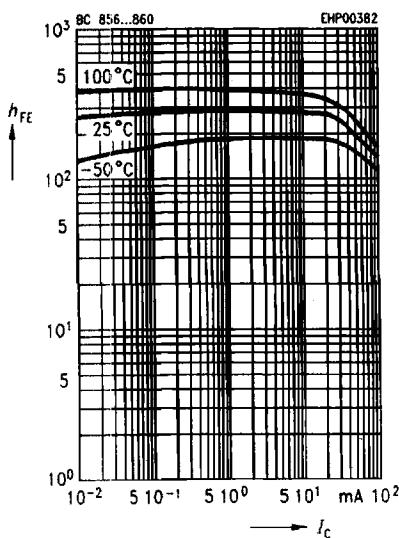


Base-emitter saturation voltage
 $I_C = f(V_{BE\text{sat}})$, $h_{FE} = 20$

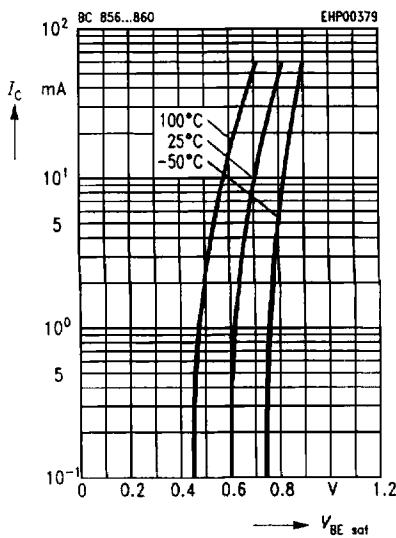


h parameter $h_{\text{e}} = f(I_C)$ normalized
 $V_{\text{CE}} = 5 \text{ V}$

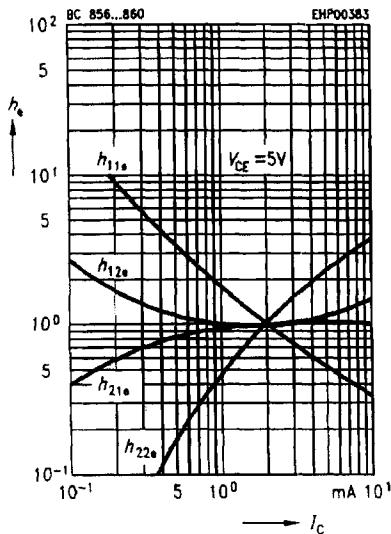


h parameter $h_{\text{e}} = f(V_{\text{CE}})$ normalized
 $I_C = 2 \text{ mA}$


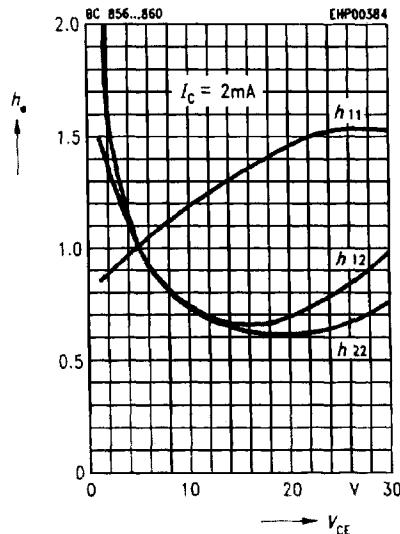


Noise figure $F = f(V_{\text{CE}})$
 $I_C = 0.2 \text{ mA}, R_s = 2 \text{ k}\Omega, f = 1 \text{ kHz}$

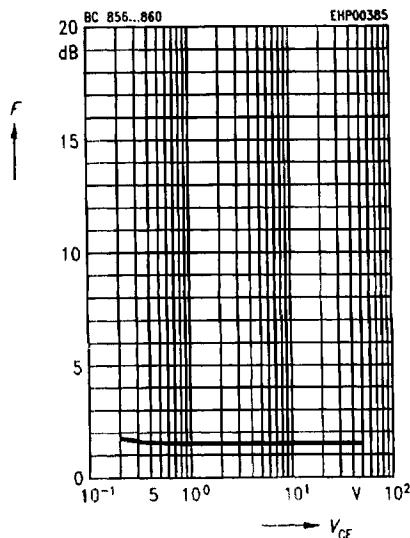

Noise figure $F = f(f)$
 $I_C = 0.2 \text{ mA}, R_s = 2 \text{ k}\Omega, V_{\text{CE}} = 5 \text{ V}$

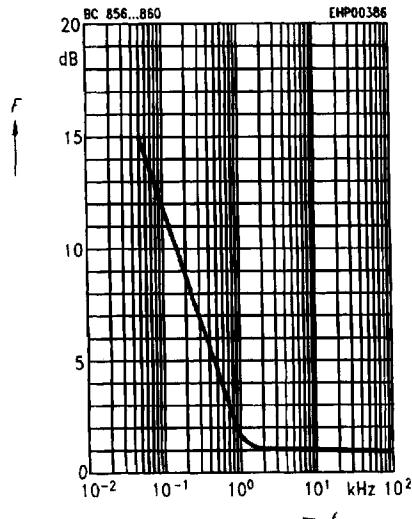

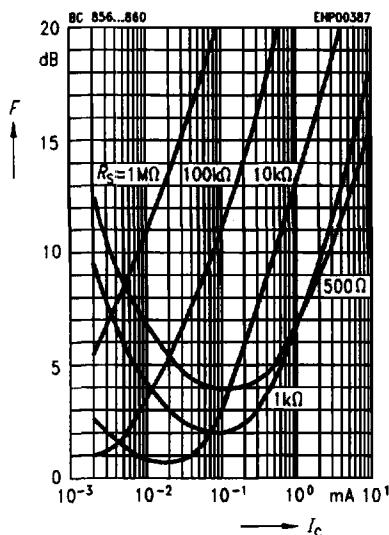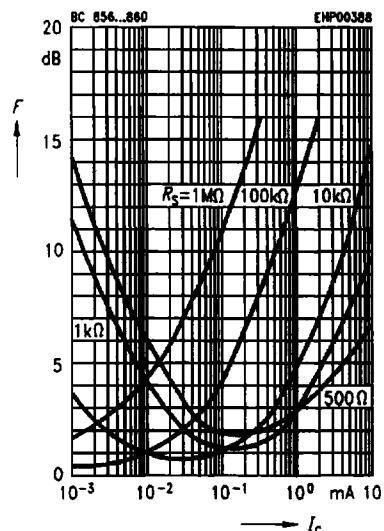Noise figure $F = f(I_c)$ $V_{CE} = 5 \text{ V}, f = 120 \text{ Hz}$ **Noise figure $F = f(I_c)$** $V_{CE} = 5 \text{ V}, f = 1 \text{ kHz}$ **Noise figure $F = f(I_c)$** $V_{CE} = 5 \text{ V}, f = 10 \text{ kHz}$ 