

PANDUIT® PAN-TERM® Disconnects

SUPRA-GRIP™ Female Disconnects

Nylon Fully Pre-Insulated


- Funnel Entry
- Integrated Metal Insulation Grip to meet double crimp requirements
- Color Coded Insulation
- Internal Wire Barrel Serrations for maximum wire tensile strength
- Tab size clearly marked on insulation housing
- Tin Plated Brass Stamping
- Wire Stop



PANDUIT's patented **SUPRA-GRIP** fully pre-insulated disconnects offer a funnel entry metal insulation grip.

Part Number	Wire Range	Color Code	Max. Ins.	Dim. (In.)			Tab Size	Std. Pkg. Qty.	Std. Ctn. Qty.	Bulk Pkg. Qty.	Bulk Ctn. Qty.
				A	W	F					
DNG18-187FB-C	22-18	Red	.128	.89	.29	.22	.187x.032 (4.7x.8)	100	1000	1000	6000
DNG18-188FB-C		Red	.128	.89	.29	.22	.187x.020 (4.7x.5)	100	1000	1000	6000
DNG18-250FB-C		Red	.126	.93	.35	.22	.250x.032 (6.3x.8)	100	1000	1000	6000
DNG14-187FB-C	16-14	Blue	.128	.89	.29	.22	.187x.032 (4.7x.8)	100	1000	1000	6000
DNG14-188FB-C		Blue	.128	.89	.29	.25	.187x.020 (4.7x.5)	100	1000	1000	6000
DNG14-250FB-C		Blue	.153	.93	.35	.25	.250x.032 (6.3x.8)	100	1000	1000	6000

Order the number of pieces required in multiples of standard package quantities. C = 100 pcs. and M = 1000 pcs.



DISCO-LOK™ Female Disconnects

Nylon Fully Pre-Insulated


- Positive Locking Mechanism: Design allows for Low Insertion Force (mating) and Locking Withdrawal Force (separation)
- Plus, all of the following features:
 - Fully Pre-Insulated (color coded)
 - Integrated Funnel Entry Insulation Grip
 - Tab Size Markings
 - Tin Plated Brass Stamping
 - Internal Wire Barrel Serrations



DISCO-LOK is the world's first fully pre-insulated positive locking disconnect receptacle. Ideal for high vibration applications where ease of insertion is important and security of connection is mandatory. This patented locking feature provides benefits to all markets.

Part Number	Wire Range	Color Code	Max. Ins.	Dim. (In.)			Tab Size In. (mm)	Std. Pkg. Qty.	Std. Ctn. Qty.	Bulk Pkg. Qty.	Bulk Ctn. Qty.
				A	W	F					
DNG18-250FL-C	22-18	Red	.126	.97	.36	.24	.250 x .032 (6.3x.8)	100	1000	1000	6000
DNG14-250FL-C	16-14	Blue	.150	.97	.36	.25	.250 x .032 (6.3x.8)	100	1000	1000	6000

Order the number of pieces required in multiples of standard package quantities. C = 100 pcs. and M = 1000 pcs.

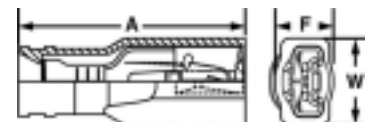


Male/Female Couplers

Nylon Fully Pre-Insulated - Funnel Entry

- Insulation Support
- Internal Wire Stop

Forms in-line disconnectable splice. Helps prevent shorting or shocks when disconnecting live circuits. Keyed for proper orientation. Each can be used alone as a fully pre-insulated disconnect.

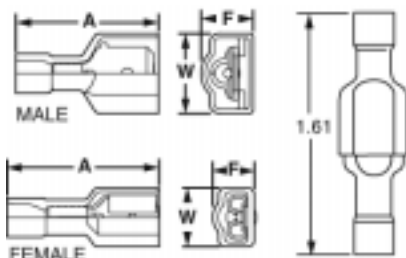

Part Number	Wire Range	Color Code	Max. Ins.	Dim. (In.)			Tab Size	Type	Std. Pkg. Qty.	Std. Ctn. Qty.	Bulk Pkg. Qty.	Bulk Ctn. Qty.
				A	W	F						
DNF18-250FIM-C	22-18	Red	.136	.90	.42	.27	.250 x .032	Male	100	1000	1000	6000
DNF18-250FIB-C		Red	.136	.84	.35	.22	.250 x .032	Female	100	1000	1000	6000
DNF14-250FIM-C	16-14	Blue	.160	.90	.42	.27	.250 x .032	Male	100	1000	1000	6000
DNF14-250FIB-C		Blue	.160	.84	.35	.22	.250 x .032	Female	100	1000	1000	6000

Order the number of pieces required in multiples of standard package quantities. C = 100 pcs. and M = 1000 pcs.

Part Number	Wire Range	Color Code	Max. Ins.	Dim. (In.)			Tab Size	Std. Pkg. Qty.	Std. Ctn. Qty.	Bulk Pkg. Qty.	Bulk Ctn. Qty.
				A	W	F					
DNF18-250FIMB-L	22-18	Red	.136	.91	.45	.35	.250 x .032	50	500	500	3000
DNF14-250FIMB-L	16-14	Blue	.160	.91	.45	.34	.250 x .032	50	500	500	3000

* Oversized housing design will mate with receptacles up to .390" wide and .235" high (.285" high for parts with orientation bump).

Order the number of pieces required in multiples of standard package quantities. L = 50 pcs., D = 500 pcs., and M = 1000 pcs.

