
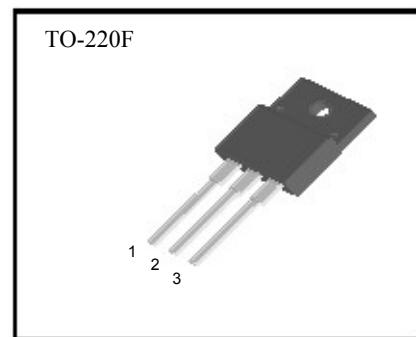


Bi-Directional Triode Thyristor

www.DataSheet4U.net

Features

- ◆ Repetitive Peak Off-State Voltage : 800V
- ◆ R.M.S On-State Current ($I_{T(RMS)} = 8 \text{ A}$)
- ◆ High Commutation dv/dt
- ◆ Isolation Voltage ($V_{ISO} = 1500\text{V AC}$)

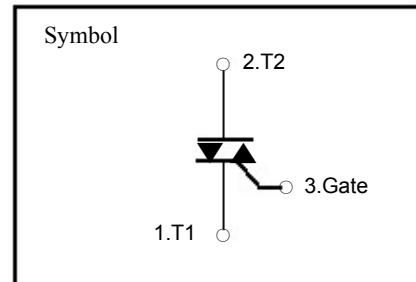

General Description

This device is fully isolated package suitable for AC switching application, phase control application such as fan speed and temperature modulation control, lighting control and static switching relay.

This device is approved to comply with applicable requirements by Underwriters Laboratories Inc.

Absolute Maximum Ratings

($T_J = 25^\circ\text{C}$ unless otherwise specified)

Symbol	Parameter	Condition	Ratings	Units
V_{DRM}	Repetitive Peak Off-State Voltage		800	V
$I_{T(RMS)}$	R.M.S On-State Current	$T_C = 89^\circ\text{C}$	8.0	A
I_{TSM}	Surge On-State Current	One Cycle, 50Hz/60Hz, Peak, Non-Repetitive	80/88	A
I_{2t}	I_{2t}		32	A ₂ s
P_{GM}	Peak Gate Power Dissipation		5.0	W
$P_{G(AV)}$	Average Gate Power Dissipation		0.5	W
I_{GM}	Peak Gate Current		2.0	A
V_{GM}	Peak Gate Voltage		10	V
V_{ISO}	Isolation Breakdown Voltage(R.M.S.)	A.C. 1 minute	1500	V
T_J	Operating Junction Temperature		- 40 ~ 125	$^\circ\text{C}$
T_{STG}	Storage Temperature		- 40 ~ 150	$^\circ\text{C}$
	Mass		2.0	g

STF8A80

Electrical Characteristics

Symbol	Items	Conditions	Ratings			Unit
			Min.	Typ.	Max.	
I _{DRM}	Repetitive Peak Off-State Current	V _D = V _{DRM} , Single Phase, Half Wave T _J = 125 °C	—	—	2.0	mA
V _{TM}	Peak On-State Voltage	I _T = 12 A, Inst. Measurement	—	—	1.4	V
I _{+GT1}	I	Gate Trigger Current	—	—	30	mA
I _{-GT1}	II		—	—	30	
I _{-GT3}	III		—	—	30	
V _{+GT1}	I	Gate Trigger Voltage	—	—	1.5	V
V _{-GT1}	II		—	—	1.5	
V _{-GT3}	III		—	—	1.5	
V _{GD}	Non-Trigger Gate Voltage	T _J = 125 °C, V _D = 1/2 V _{DRM}	0.2	—	—	V
(dv/dt) _C	Critical Rate of Rise Off-State Voltage at Commutation	T _J = 125 °C, [di/dt] _C = -4.0 A/ms, V _D =2/3 V _{DRM}	10	—	—	V/ μ s
I _H	Holding Current		—	15	—	mA
R _{th(j-c)}	Thermal Impedance	Junction to case	—	—	3.7	°C/W

STF8A80

Fig 1. Gate Characteristics

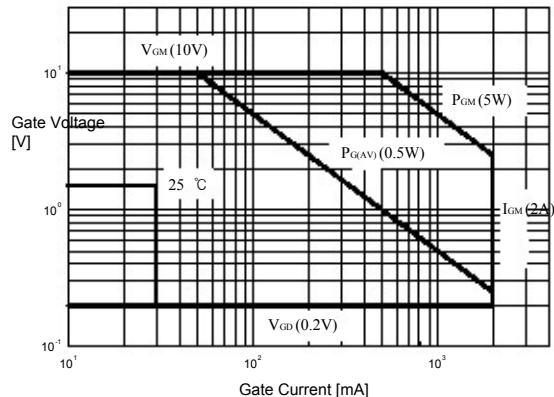


Fig 3. On State Current vs.
Maximum Power Dissipation

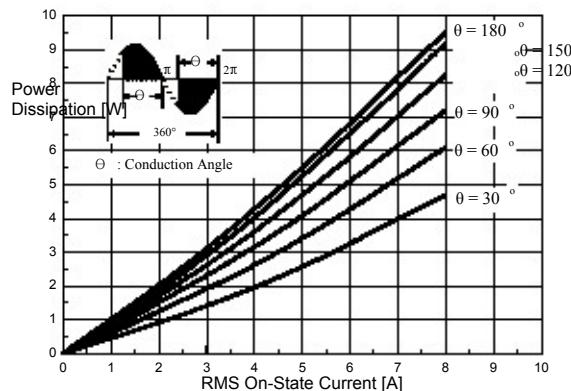


Fig 5. Surge On-State Current Rating
(Non-Repetitive)

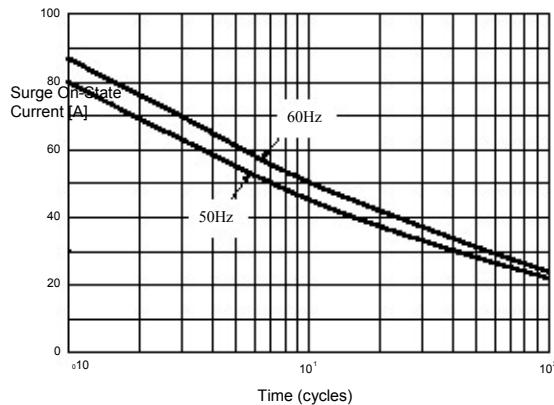


Fig 2. On-State Voltage

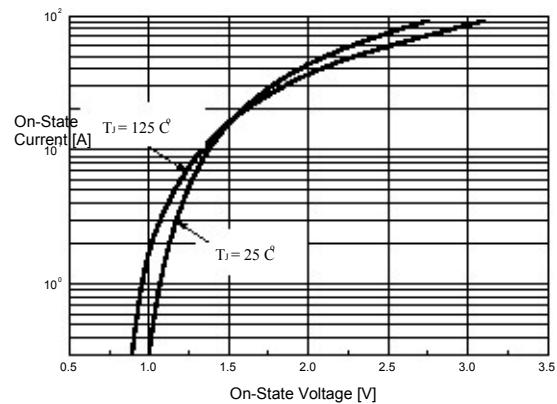


Fig 4. On State Current vs.
Allowable Case Temperature


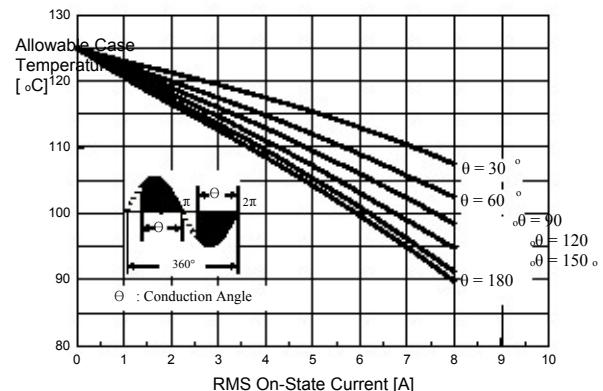


Fig 6. Gate Trigger Voltage vs.
Junction Temperature

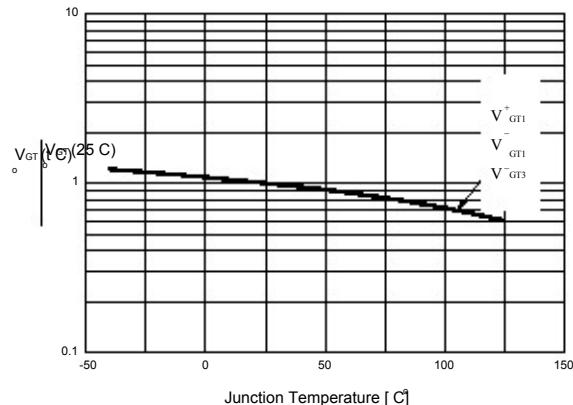

STF8A80

Fig 7. Gate Trigger Current vs.
Junction Temperature

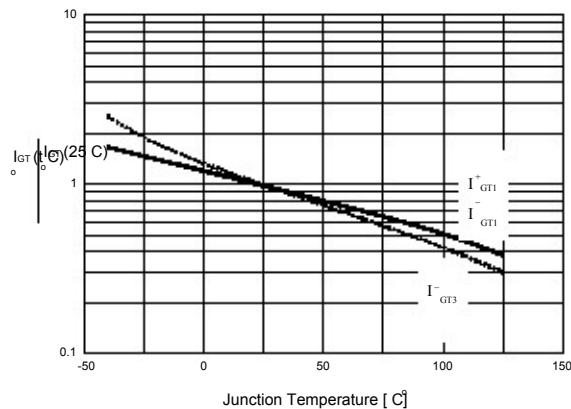


Fig 8. Transient Thermal Impedance


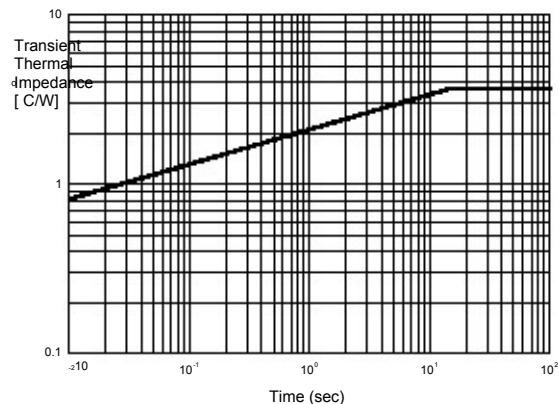


Fig 9. Gate Trigger Characteristics Test Circuit

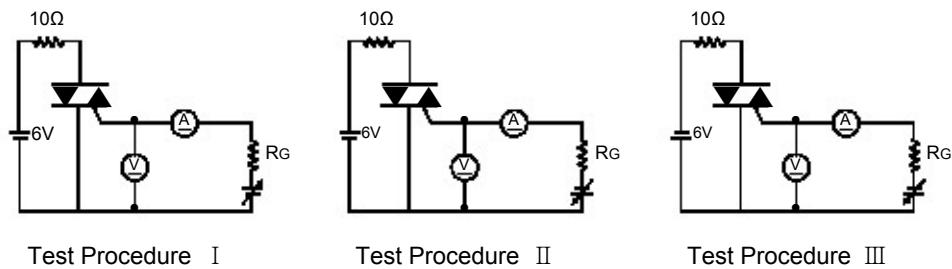

STF8A80

TO-220F Package Dimension

Dim.	mm			Inch		
	Min.	Typ.	Max.	Min.	Typ.	Max.
A	10.4		10.6	0.409		0.417
B	6.18		6.44	0.243		0.254
C	9.55		9.81	0.376		0.386
D	13.47		13.73	0.530		0.540
E	6.05		6.15	0.238		0.242
F	1.26		1.36	0.050		0.054
G	3.17		3.43	0.125		0.135
H	1.87		2.13	0.074		0.084
I	2.57		2.83	0.101		0.111
J						
K						
L		2.54			0.100	
M		5.08			0.200	
O	2.51		2.62	0.099		0.103
	1.25		1.55	0.049		0.061
	0.45		0.63	0.018		0.025
	0.6		1.0	0.024		0.039
Φ		3.7			0.146	
Φ 1		3.2			0.126	
Φ 2		1.5			0.059	

