

E-Series 2-Way 0° Power Divider

950 - 1550 MHz

ES-2-8-75

V3.00

Features

- 2 Way
- 0°

Specifications @ 25°C

Frequency Range	950 - 1550 MHz	
Insertion Loss	Typical	Maximum
950 - 1550 MHz	0.9 dB	20 dB
Isolation	Typical	Minimum
950 - 1550 MHz	11 dB	9 dB
Amplitude Unbalance	Maximum	
950 - 1550 MHz	0.7 dB	
Phase Unbalance	Maximum	
950 - 1550 MHz	8°	

Operating Characteristics

Impedance	75 Ohms Nominal
-----------	-----------------


Ordering Information

Part No.	Packaging
ES-2-8-75	Tube

Absolute Maximum Ratings

Parameter	Absolute Maximum
Maximum Power Rating	1 Watt
Internal Load Dissipation	0.125 Watt
Pin Temp (10 sec)	260°C
Storage Temperature	-55°C to 100°C

R-3

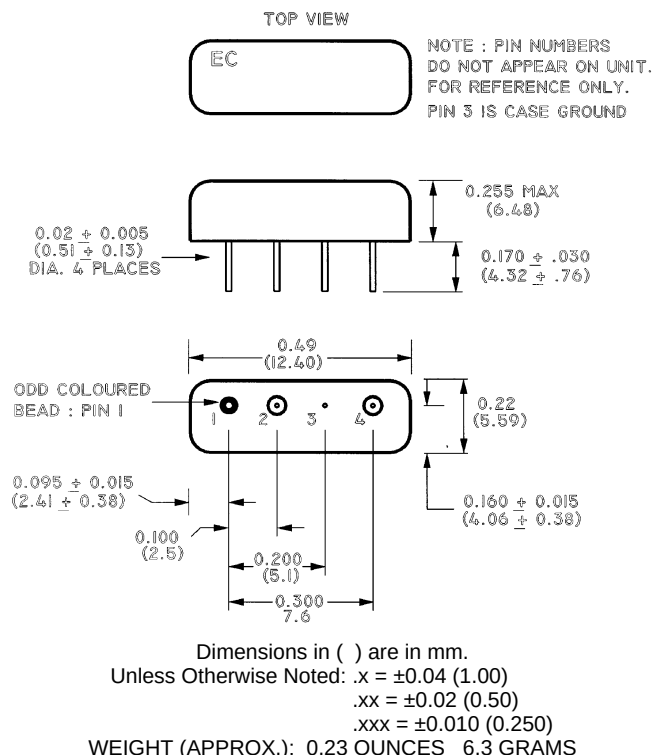

Pin Configuration

Function	Pin No.
Not Connected	3
Input	2
Port 1	1
Port 2	4

S 1069 A