




This drawing is the property of Tusonix, Inc., and may not be used, reproduced, published or disclosed to others without expressed authorization by Tusonix Inc.

Electrical Testing per Tusonix standard test plans and Mil-Std-202 Test Methods.

MARKETING SALES DRAWING

DIMENSIONS IN INCHES - DO NOT SCALE THIS DRAWING

DIMENSIONS IN METRIC - []

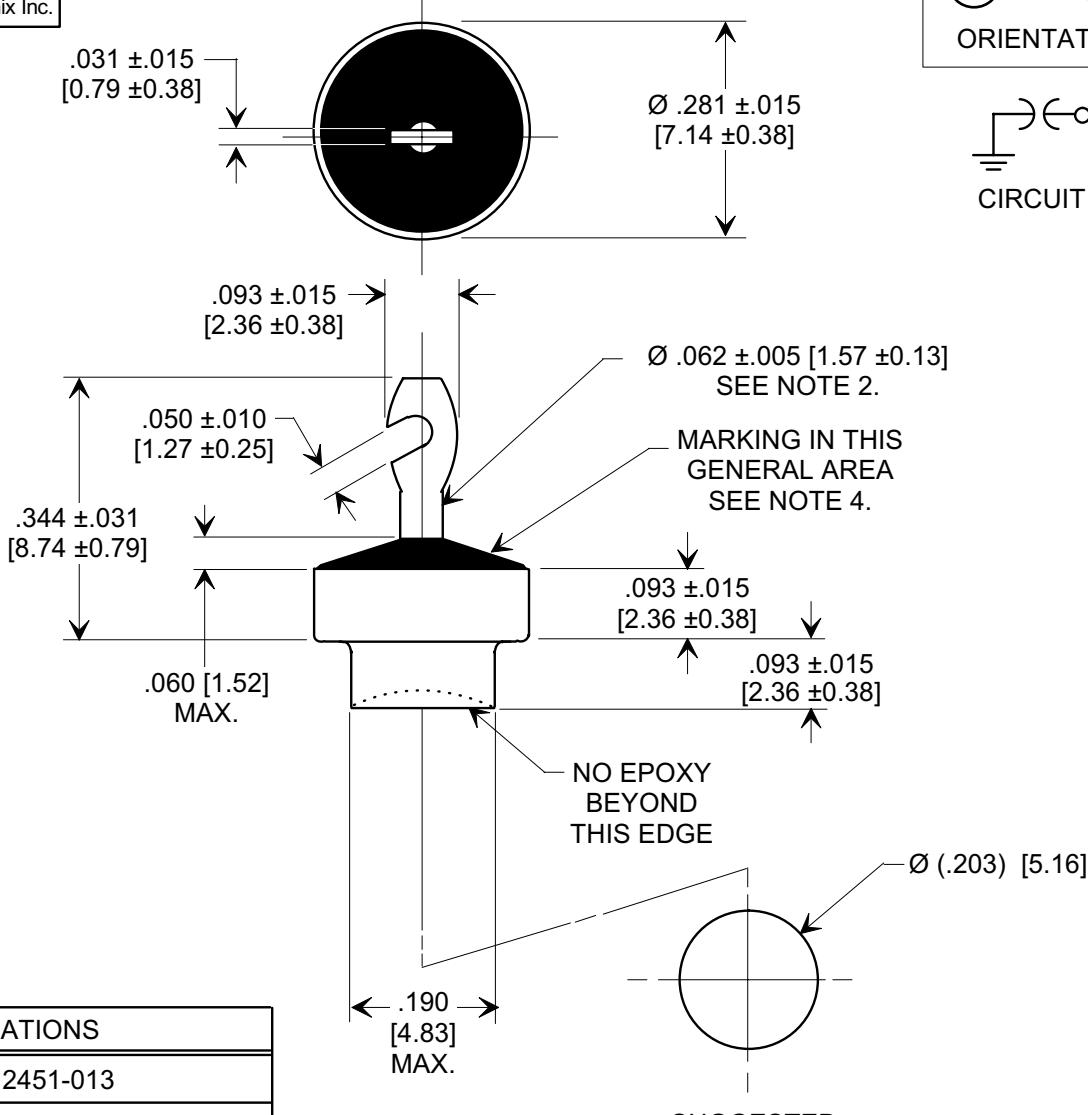

SPECIFICATIONS

TUSONIX STYLE:	2451-013
CAP. VALUE:	1000 pF
CAP. TOL.:	+100, -0%
TEMP. CHAR.:	X5U
RATING:	500 VDC @ +85°C 250 VDC @ +125°C
OPERATING RANGE:	-55°C TO +125°C
CURRENT (A)	25
I.R. MIN. @ 100 VDC:	10 GΩ
DWV:	1250 VDC
MARKING:	NONE

NOTES:

1. TUSONIX STANDARD PART NUMBER: 2451-013-X5U0-102P.
TUSONIX RoHS COMPLIANT PART NUMBER:
2451-013-X5U0-102P LF.
CUSTOMER MUST SPECIFY STANDARD OR RoHS PART NUMBER WHEN ORDERING.
2. LEAD FINISH: SILVER.
3. SHELL FINISH: SILVER.
4. PART MARKING:
STANDARD PART: NONE.
RoHS PART: GREEN DOT ON EPOXY.

REVISION RECORD	Original Release C.O.	WAS SK 8188-683. S.M. 07-13-06	0 20060713-3-04	--TOLERANCES-- Unless Otherwise Specified	Title			
					DECIMAL ± NOTED	ANGLES ± / / /		
				Drawn L.E. 02-03-06		Scale 4 X		
				Approved B.Mc. 02-03-06				
				A	2451-013-X5U0-102P			