


ALUMINUM ELECTROLYTIC CAPACITORS




UX series Chip Type, Higher Capacitance Range



Upgrade

- Chip type, higher capacitance in larger case sizes.
- Designed for surface mounting on high density PC board.
- Applicable to automatic mounting machine fed with carrier tape.
- Compliant to the RoHS directive (2002/95/EC).



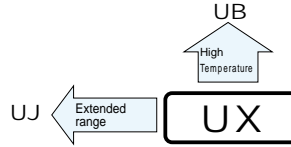


Specifications

Item	Performance Characteristics												
Category Temperature Range	-55 to +105°C (6.3 to 100V), -40 to +105°C (160 to 400V)												
Rated Voltage Range	6.3 to 400V												
Rated Capacitance Range	1 to 1000μF												
Capacitance Tolerance	±20% at 120Hz, 20°C												
Leakage Current	Rated voltage (V)	6.3 to 100											
	Leakage Current	After 1 minute's application of rated voltage, leakage current is not more than 0.03CV (μA). I = 0.04CV+100 (μA) max. (1 minute's)											
Tangent of loss angle (tan δ)	Measurement frequency : 120Hz, Temperature : 20°C												
	Rated voltage (V)	6.3	10	16	25	35	50	63	100	160	200	250	400
Stability at Low Temperature	Measurement frequency: 120Hz												
	Rated voltage (V)	6.3	10	16	25	35	50	63	100	160	200	250	400
Endurance	Impedance ratio	Z-55°C / Z+20°C	4	4	3	3	3	2	3	4	—	—	—
	ZT / Z20 (MAX.)	Z-40°C / Z+20°C	—	—	—	—	—	—	—	—	6	6	6
Shelf Life	The specifications listed at right shall be met when the capacitors are restored to 20°C after the rated voltage is applied for 2000 hours (160 to 400V : 3000hours) at 105°C.		Capacitance change		Within ±20% of the initial capacitance value								
			tan δ		200% or less than the initial specified value								
Resistance to soldering heat	The capacitors are kept on a hot plate for 30 seconds, which is maintained at 250°C. The capacitors shall meet the characteristic requirements listed at right when they are removed from the plate and restored to 20°C.		Leakage current		Less than or equal to the initial specified value								
			Capacitance change		Within ±10% of the initial capacitance value								
Marking			tan δ		Less than or equal to the initial specified value								
			Leakage current		Less than or equal to the initial specified value								
Marking	Black print on the case top.												

Chip Type

Type numbering system (Example : 10V 100μF)

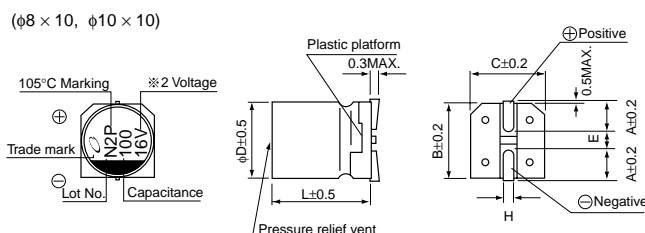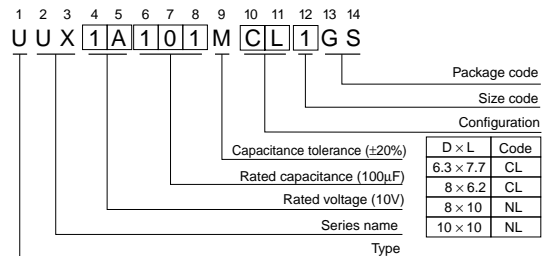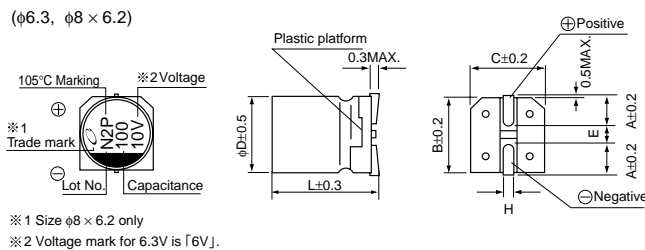

	(mm)			
φD×L	6.3 × 7.7	8 × 6.2	8 × 10	10 × 10
A	2.4	3.3	2.9	3.2
B	6.6	8.3	8.3	10.3
C	6.6	8.3	8.3	10.3
E	2.2	2.3	3.1	4.5
L	7.7	6.2	10	10
H	0.5 to 0.8	0.5 to 0.8	0.8 to 1.1	0.8 to 1.1

● Dimension table in next page.

CAT.8100Y

■ Dimensions

Cap. (μF)	Code	6.3		10		16		25		35		50		63		100		
		0J		1A		1C		1E		1V		1H		1J		2A		
4.7	4R7																8×6.2	42
10	100														8×6.2	51	8×10	75
22	220											○ 8×6.2	67(64)	8×10	108	■ 10×10	150(121)	
33	330									○ 8×6.2	76(75)	8×10	133	■ 10×10	185(179)	10×10	180	
47	470							○ 8×6.2	79(78)	8×10	124	■ 10×10	180(167)	10×10	220	10×10	230	
100	101			8×6.2	90	○ 8×10	148(111)	8×10	181	■ 10×10	304(283)	10×10	310	10×10	320			
220	221	○ 8×10	161(121)	8×10	173	■ 10×10	330(307)	■ 10×10	351(283)	10×10	450							
330	331	8×10	288	■ 10×10	318(296)	■ 10×10	441(410)	10×10	372									
470	471	■ 10×10	340(316)	■ 10×10	351(326)	10×10	489											
680	681	10×10	408	10×10	392													
1000	102	10×10	495														Case size φD × L (mm)	Rated ripple

Cap. (μF)	Code	160		200		250		400	
		2C		2D		2E		2G	
1	010							8×10	25
1.8	1R8							8×10	26
2.2	2R2							8×10	27
3.3	3R3			8×10	31	8×10	31	10×10	38
3.9	3R9			8×10	34	8×10	34	10×10	39
4.7	4R7			8×10	37	8×10	37	10×10	40
6.8	6R8			8×10	44	8×10	44		
10	100	8×10	57	10×10	64	10×10	64		
18	180	10×10	64						

Rated ripple current (mA rms) at 105°C 120Hz

Size φ6.3 × 7.7 is available for capacitors marked. "○" / Size φ8 × 10 is available for capacitors marked. "■"

※ In this case, [6] will be put at 12th digit of type numbering system.

● Frequency coefficient of rated ripple current

Cap. (μF)	Frequency	50 Hz	120 Hz	300 Hz	1 kHz	10 kHz or more
Less than 47	0.80	1.00	1.15	1.40	1.67	
	0.85	1.00	1.08	1.20	1.30	

- Taping specifications are given in page 23.
- Recommended land size, soldering by reflow are given in page 18, 19.
- Please select UJ(p.102) series if high C/V products are required.
- Please refer to page 3 for the minimum order quantity.